CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 6, Township 103, Range 15, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6-13-90 found a 2 1/2' long steel pipe. Reset pipe location

☐ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On 6-22-90 placed a Standard County Monument.

SKETCH OF REFERENCE TIES

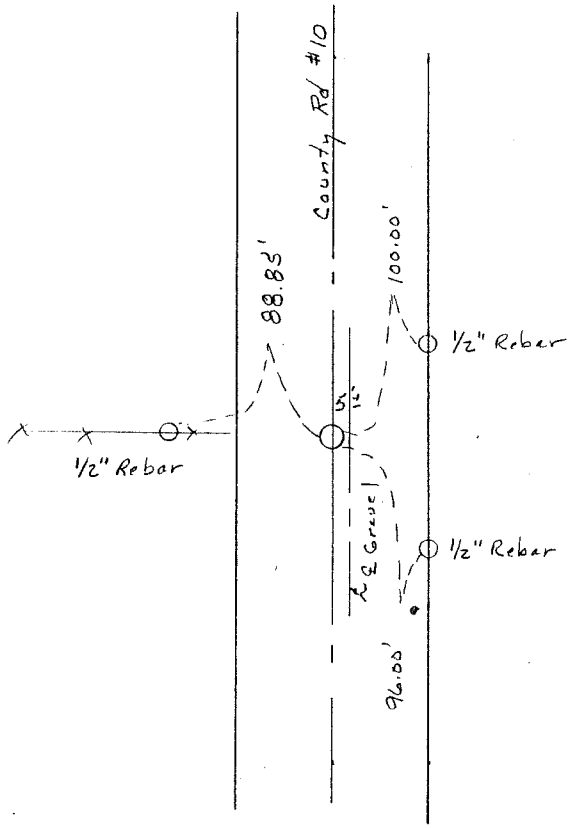

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond A Tucker
Signature

6-29-90
Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 6 - T103N - R15W

1853 - John Quigley, Deputy Surveyor, set a quarter section post, built a mound with trench per instruction, placed a handfull small stones in center and planted osage orange seeds in S.E. Corner during the Origianl Public Land Survey.

1962 - C.E. Milner, R.L.S. 1476, during a Power Line Encroachment Survey shows a monument 2.01 feet West of centerline.

June 1990 - Tucker Land Surveying excavated this location and found a 2 1/2 feet long steel pipe flush with surface 5 feet West of Centerline. Removed and excavated to original ground found nothing else. Reset pipe location with Standard County Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.