CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 103, Range 15,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Cast Iron Monument.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

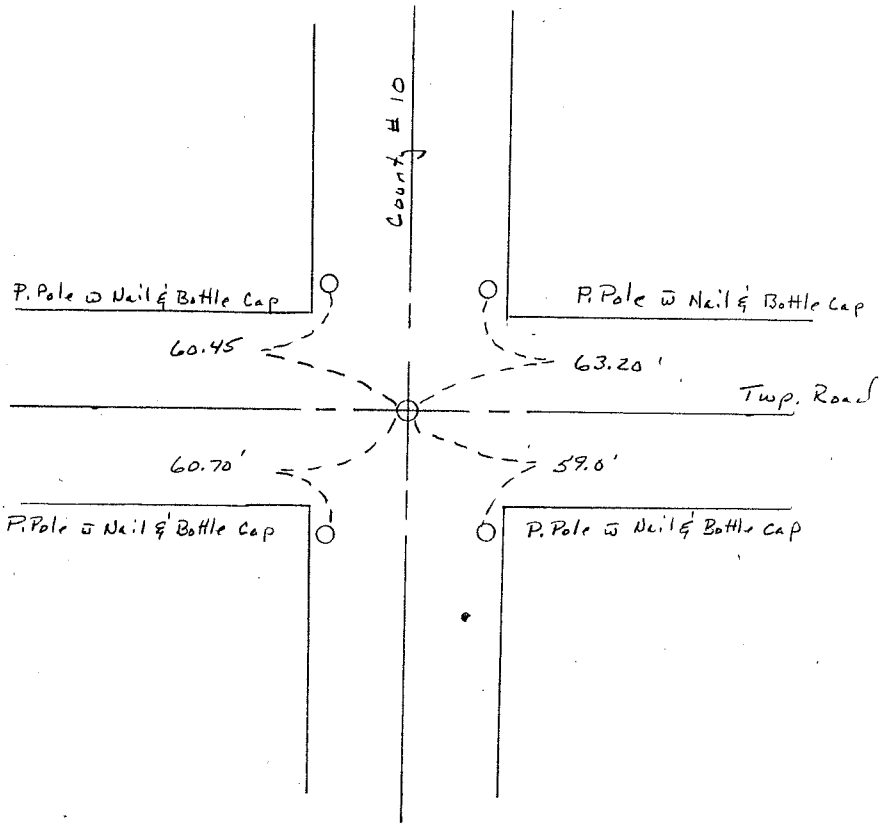

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tucker — Signature

6-29-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 6 -T103N - R15W

1853 - John Ball, Deputy Surveyor, set a quarter section post, built mound with trench per instruction, put hand full small stones in center and planted osage orange seeds in SE corner during the Original Public Land Survey.

1952 - Mower County Highway Department note show an inplaced concrete monument 8" below the surface.

1962 - C.E. Milner, R.L.S., 1476, during a Power Line Encroachment Survey shows a monument 1.34 feet West of centerline.

March 1990 - Mower County Highway Department notes show an inplaced cast iron monument.

June 1990 - Tucker Land Surveying excavated this location and found a cast iron monument. Accepted as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

p102 TIE BOOK

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 103N, Range 15 W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On Dec. 5, 1980 found a steel rod in concrete monument over a 6"x8"x6" Stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On Dec. 5, 1980 placed a cast iron Monument over concrete monument and stone.

SKETCH OF REFERENCE TIES

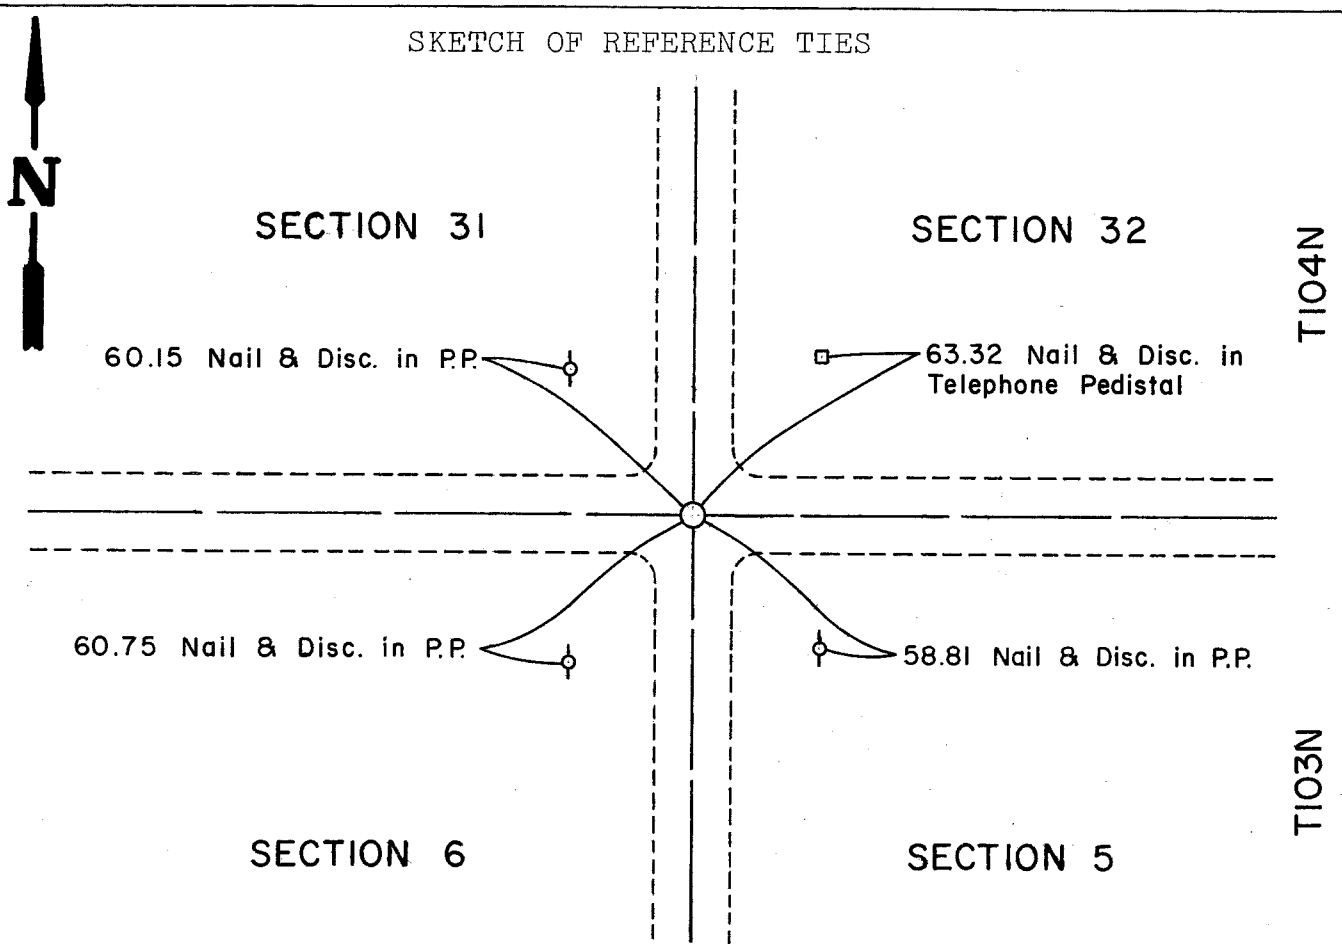

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald L. Olson — Signature
12-16-80 — Date

Registration No. 11009
☒ Land Surveyor, ☒ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 6, TOWNSHIP 103 NORTH, RANGE 15 WEST, 5th P.M.

July, 1853 — John Ball, Deputy Surveyor, set the corner during the original Public Land Survey.

Dexter Township, Mower County, Minnesota constructed roads North-South and East-West through the vicinity of the corner.

1930's-1940's — Mower County set concrete monuments at corners in the county.

1952 — Mower County obtained control of the North-South road and constructed a county road. An iron rod in concrete was found down 0.7 feet at the road intersection. The road was raised in this area.

December 5, 1980

Ronald J. Olson, Land Surveyor, searched the area with a magnetic locator. An excavation was made with the cooperation of the Mower County Engineer and two concrete monuments with iron rods were found in the embankment over a 6 inch by 6 inch by 8 inch high pointed stone found 4 feet below the surface. The excavation was 4 feet E-W by 6 feet N-S by 4 feet deep centered on the stone. The earth under the stone was undisturbed and no other evidence was found.

An electronic measurement was made to the monument 1 mile north and the distance agrees within 1 foot of the distance measured in 1952.

The stone has been perpetuated as the corner for over 40 years and is accepted as marking the corner of the original Public Land Survey.

For additional details contact Zenk Engineering, Inc., Albert Lea, Minnesota 56007.