Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-5-85 (DATE) found a PK nail on road surface over a spike over a ½" dia. iron cast in center of 5" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-5-85 (DATE) placed a RR spike over concrete monument

SKETCH OF REFERENCE TIES

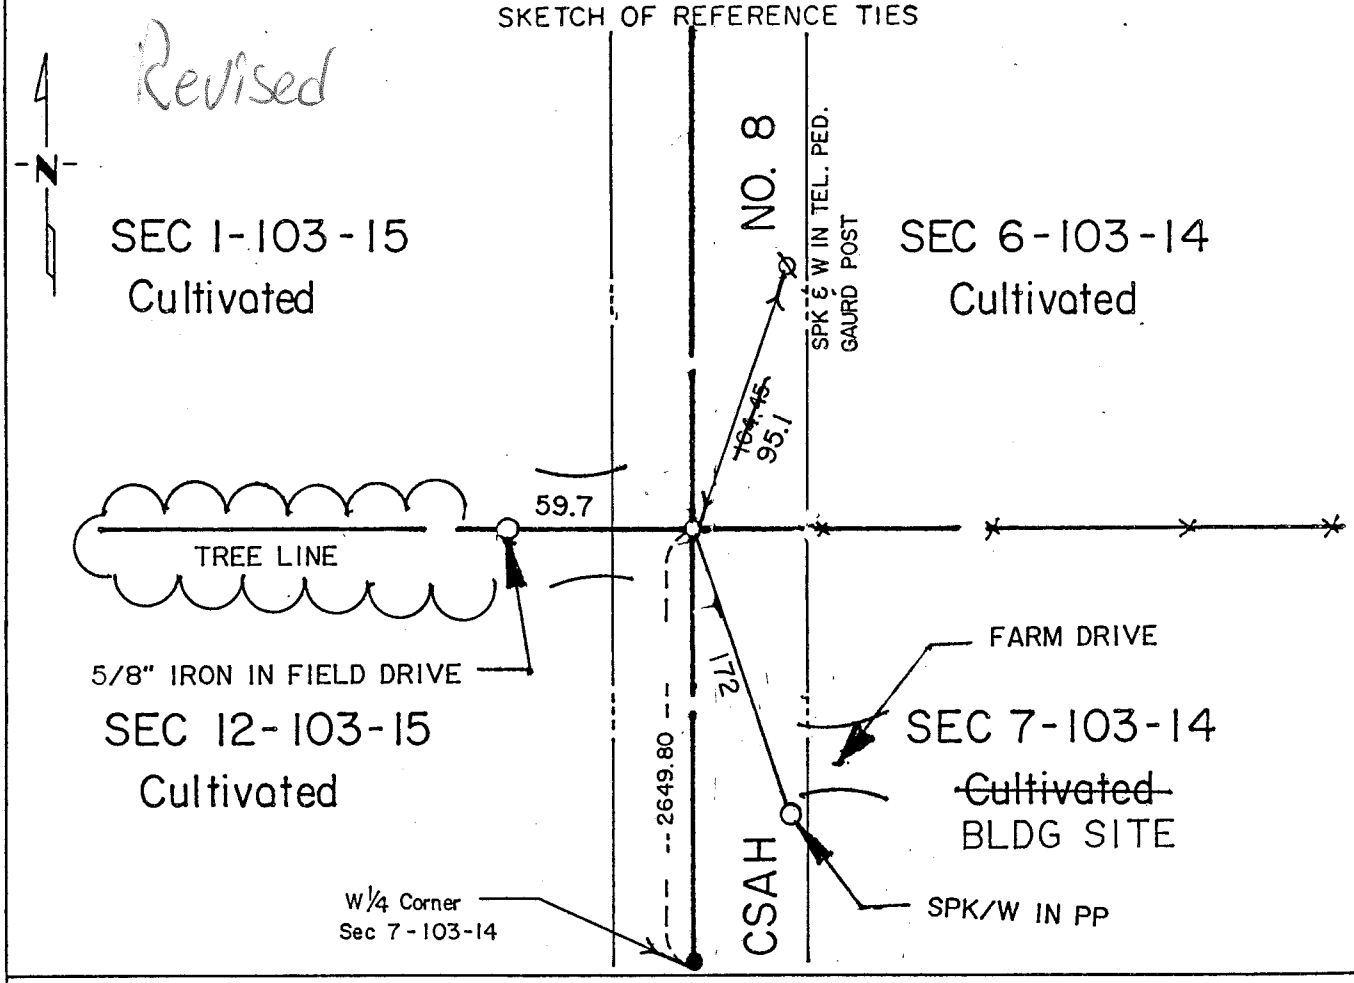

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post and a trench with a mound of earth. Ties were taken:

10" Black Oak S 23 1/2° W 290 links (191.40 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1940 Book 'A' in the County Engineer's Office shows a concrete monument inplace. Ties were taken and recorded.

1985 Jones, Haugh & Smith crew dug and found a PK nail over a spike over a 1/2 diameter iron, cast in a square concrete monument 1.8 feet deep in line with fence east-west, 1.5 feet west of the centerline of County State Aid Highway No. 8.

Corner found fits occupation, road centerlines, past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-5-85 (DATE) found a PK nail on road surface over a spike over a ½" dia. iron cast in center of 5" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-5-85 (DATE) placed a RR spike over concrete monument

SKETCH OF REFERENCE TIES

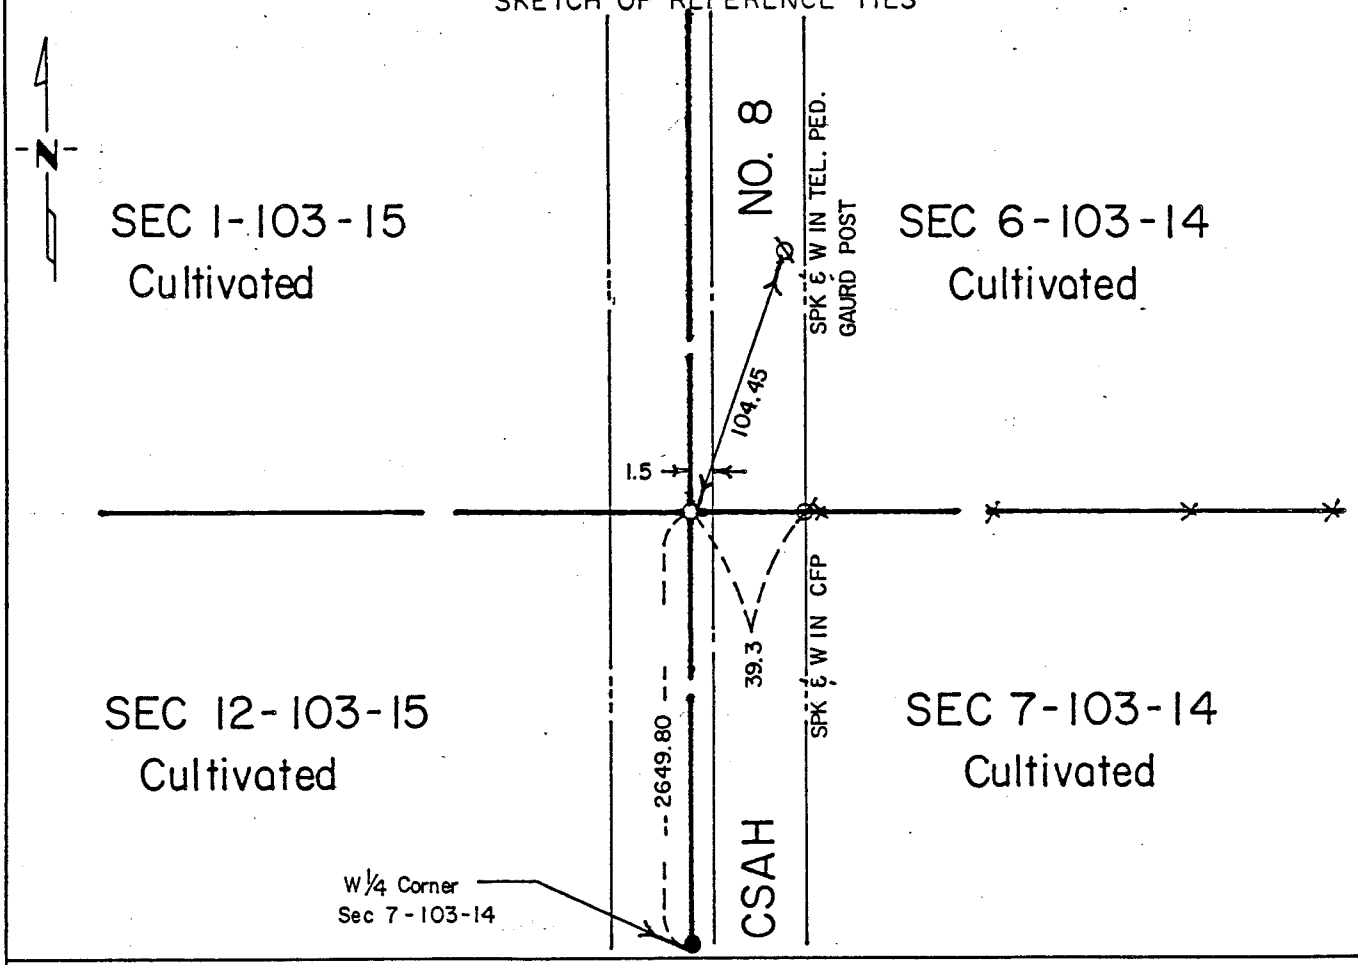

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 11-1-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post and a trench with a mound of earth. Ties were taken:

10" Black Oak S 23 1/2° W 290 links (191.40 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1940 Book 'A' in the County Engineer's Office shows a concrete monument inplace. Ties were taken and recorded.

1985 Jones, Haugh & Smith crew dug and found a PK nail over a spike over a 1/2 diameter iron, cast in a square concrete monument 1.8 feet deep in line with fence east-west, 1.5 feet west of the centerline of County State Aid Highway No. 8.

Corner found fits occupation, road centerlines, past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.