Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22, Township 103N, Range 15W, 5TH P.M.
MOWER

STATE OF MINNESOTA, County of _____


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-15-82 (DATE) placed a MHD Cast Iron Monument Flush

SKETCH OF REFERENCE TIES

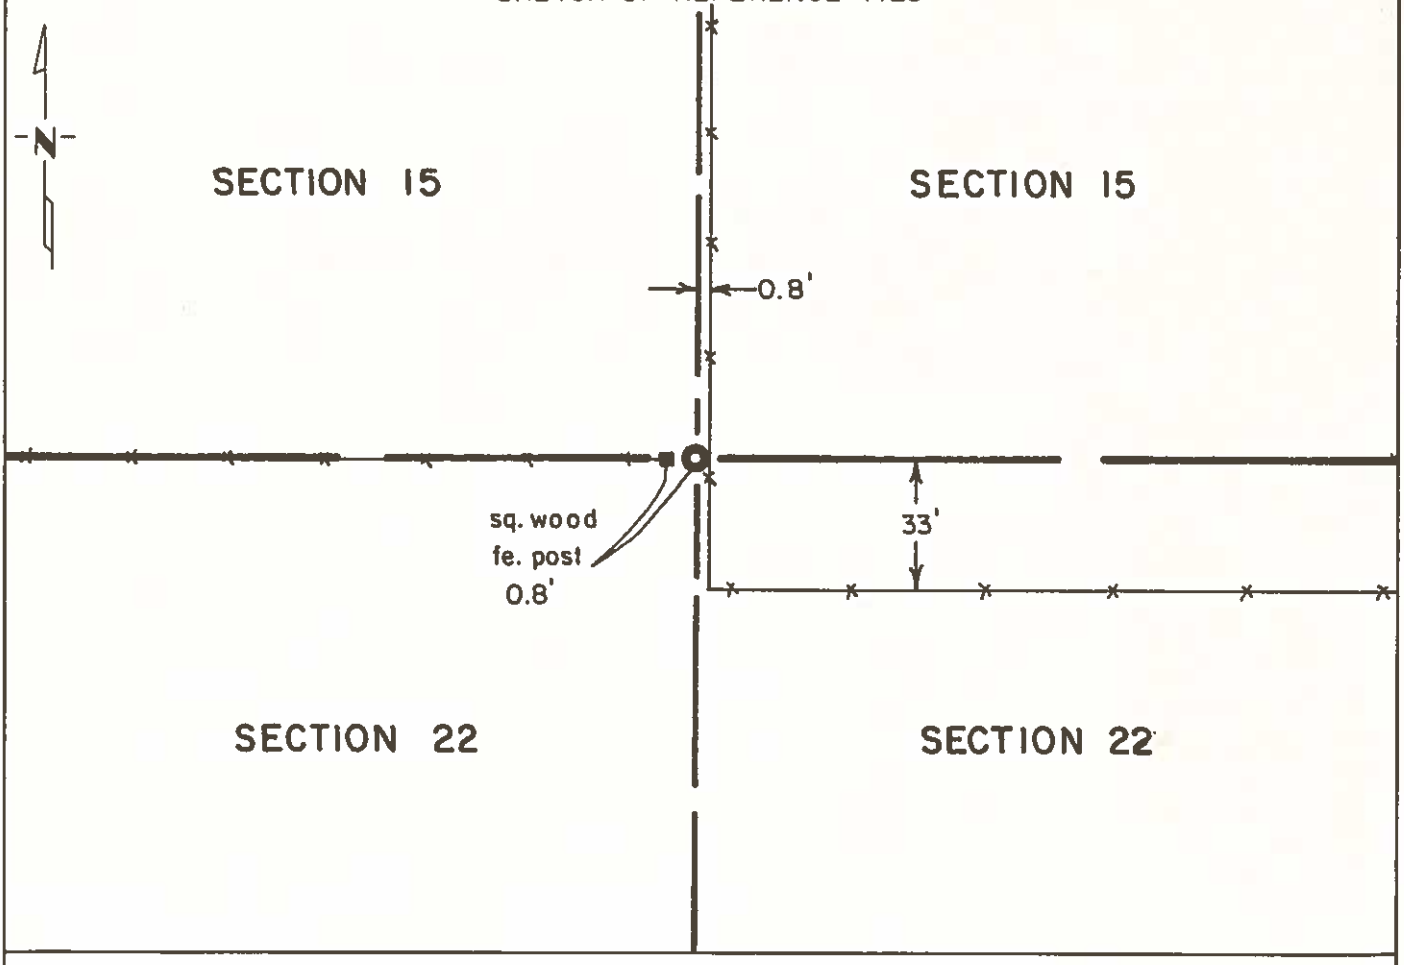


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision. BOOK 55 PAGE 569

Marlen R. McGowan 1-6-83
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 2 P. .M. on the 19 day of JAN. A.D., 19 83

County Recorder Charles Engen

By Dorothy Johnson, Deputy

DOCUMENT NO. 355586

IN Book EE Misc. Pg. 569

Mn/DOT 2105 (4-77)

**Statement of Evidence:**

North Quarter Corner Section 22 Township 103N, Range 15W, 5TH P.M.

July 28, 1853 — John Quigley, Deputy Surveyor, set a post in a mound for the corner during the original Public Land Survey.

Research failed to uncover any other record of this location.

An analysis of the survey data indicates tht the north-south fence and fence to the west is the best evidence of the obliterated position of the corner. A cast iron monument was set on the east side of the oldest fence post to mark the corner.

For details of the electronic survey, contact the Surveying and Mapping Section of the Department of Transportation, Rochester.

BOOK 55 PAGE 570