Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 27, Township 103N, Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-15-82 (DATE) placed a MHD Cast Iron Monument Flush

SKETCH OF REFERENCE TIES

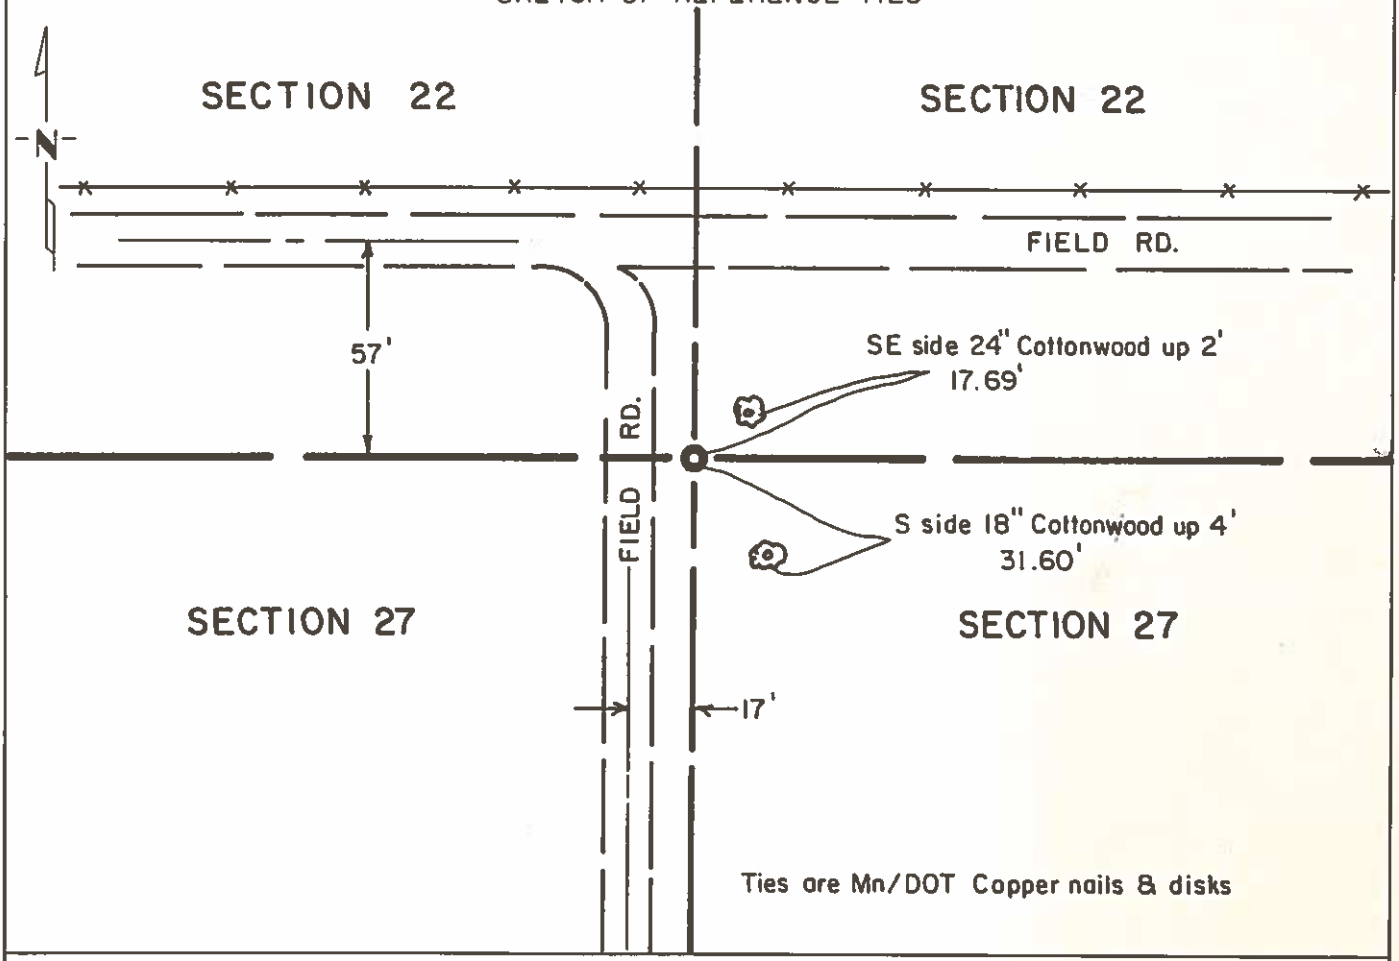

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

BOOK 55 PAGE 571

Marlow R. McGowan (SIGNATURE) 1-6-83 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 2 P. .M. on the 19 day of JAN. A.D., 1983

County Recorder Charles Engh

By Dorothy Johnson, Deputy

DOCUMENT NO. 355587

M.H.D. FORM NO. 2105

in Book 55 of Misc'l. Pg 571.

Statement of Evidence:

North Quarter Section 27 T103N R15W

July 27, 1853 — John Quigley, Deputy Surveyor, set a post in a mound for the corner during the original Public Land Survey.

Research failed to uncover any other records of this corner location.

An analysis of the survey data and landowners statements indicate that the intersection of the remains of fences is the best evidence of the obliterated position of this corner. A cast iron monument was placed at the intersection of buried wire from the west and south to mark the corner.

For details of the electronic survey, contact the Surveying and Mapping Section of the Department of Transportation, Rochester.

BOOK 55 PAGE 572