Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/13/1992 (DATE) found a 6" CONC. MON. OVER POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/13/1992 (DATE) placed a 5/8" DIA. IRON OVER CONCRETE MON. OVER STONE.

SKETCH OF REFERENCE TIES

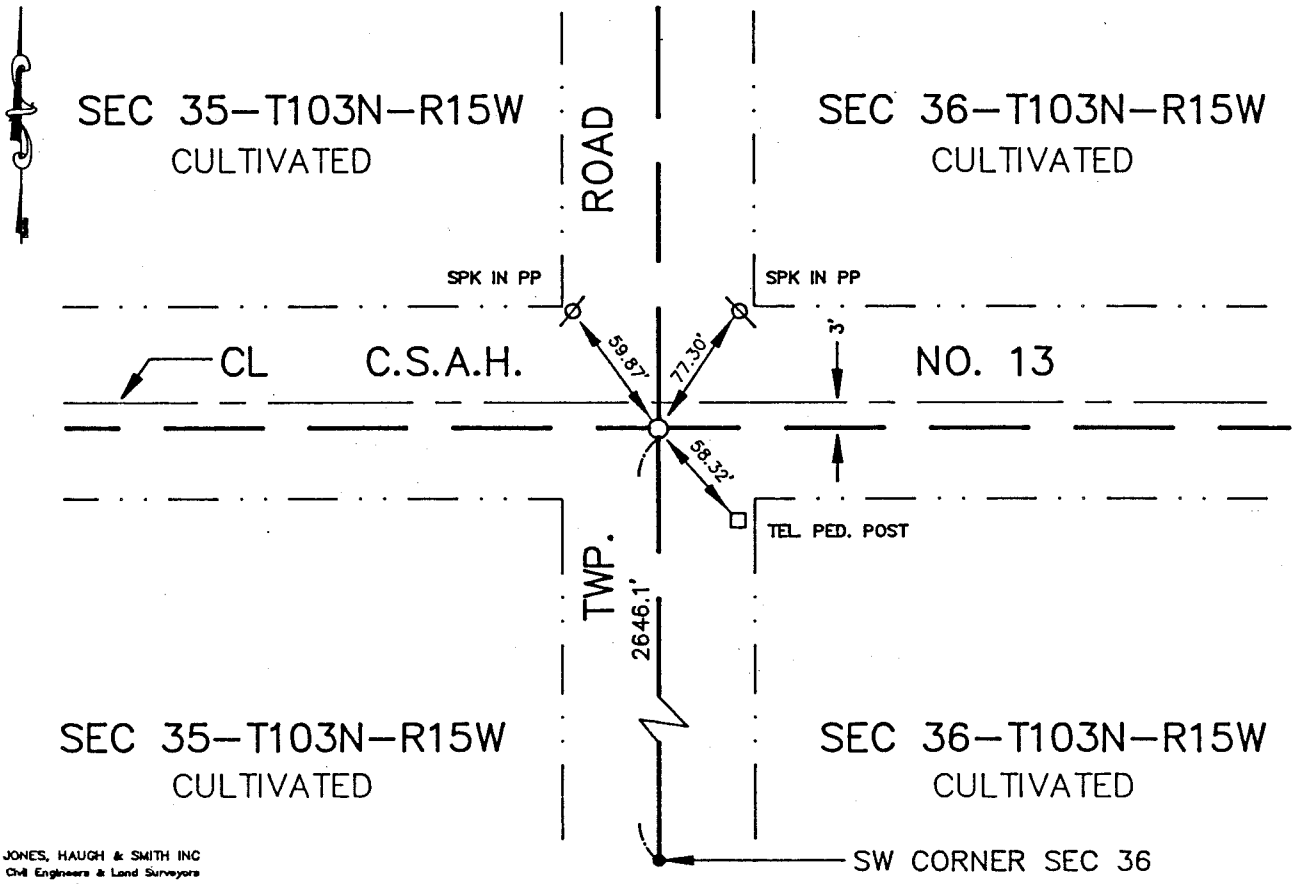

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1945 Book A in the office of the Mower County Highway Department shows the following information was taken to support evidence of a perpetuation of the original public land survey corner:
Pieces of former concrete tile monument found inplace above stone monument. Set stone monument with iron bolt above stone 4" below road surface. The following ties were taken:
72.2' NE 16" Maple
47.6' NW br. girder corner fence post
27.0' SE end 24" CMP
52.3' SW end 18" S.C. cult

1948 Book A in the office of Mower County Highway Department indicates pieces of tile was inplace. The following ties were taken:
46.2' SE to willow tree
72.2' NE to maple tree
42.4' NW to tele pole
37.6' SW to tele pole

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with county backhoe and at a depth of 18" found a concrete monument with 1/2" diameter iron in center, 3.25 feet south and one foot west of 3/4" diameter pipe found on road surface. Continued digging and found 3/4" bolt over a pointed field stone. Set concrete monument over stone and 5/8" diameter iron capped RLS 13807 over monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-13-1992 (DATE) found a 6" DIA. CONCRETE MONUMENT OVER 3/4"x24" BOLT OVER POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-13-1992 (DATE) placed a 6" DIA. CONCRETE MONUMENT OVER STONE. PLACED 5/8" DIA. IRON CAPPED RLS 13807 OVER STONE.

SKETCH OF REFERENCE TIES

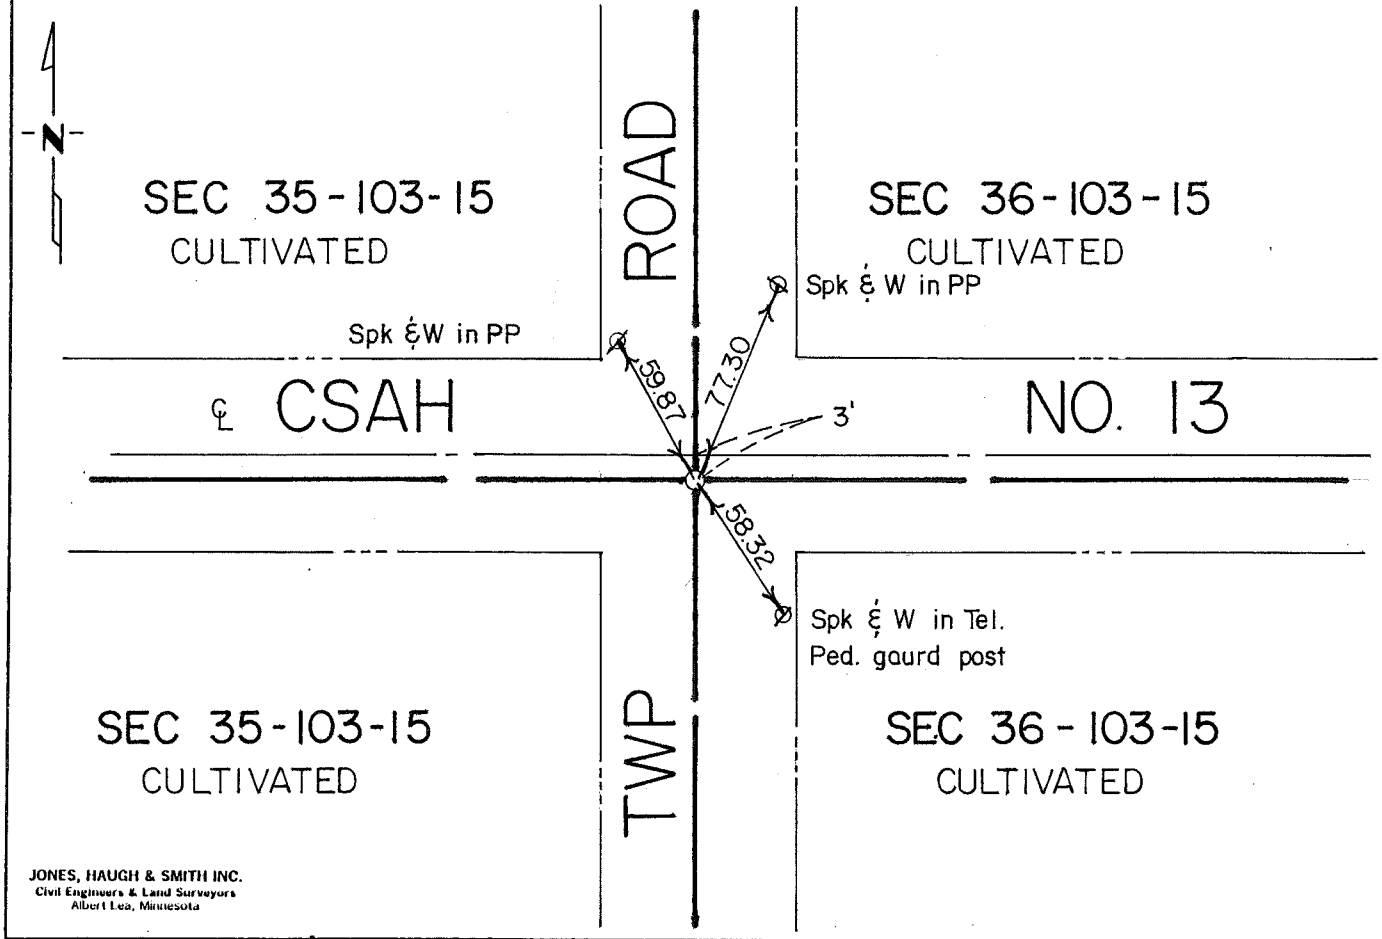

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 4-27-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, uncovered a stone monument while subdividing the N 1/2 Section 35.

1946 C.E. Milner, RLS 1476, uncovered pieces of former concrete tile over stone monument. Placed a bolt over stone and the following ties were taken:

16" Maple	72.2' NE
Br Grider	47.6' NW
End 24" CMP	27.0' SE
End 12" CMP	52.3' SW

1955 Mower County Highway Department uncovered stone monument and set concrete monument over stone. The following ties were taken:

46.2' SE to Willow tree
72.2' NE to Maple tree
42.2' NW to telephone pole
37.6' SW to telephone pole

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline and uncovered a capped pipe. Continued digging and found no further evidence. After taking measurement within the section, dug at a point three feet south of capped pipe as per records of C.E. Milner a distance of 2646.3 feet north of southwest corner of Section 36 and uncovered a 6" diameter concrete monument over a 3/4" bolt over a large pointed field stone 3.5 feet deep in virgin soil. Re-set concrete monument over stone and set 5/8" diameter iron capped RLS 13807 over concrete monument on road surface. The pipe on surface was 3.2 feet north one foot east of true corner.

The monument found agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.