CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 4, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-7-90 found 5/8" ROD, BENT, REMOVED DURING EXCAVATION

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 9-7-90 placed COUNTY CAP ON 1/2" PIPE INPLACE OF ROD

SKETCH OF REFERENCE TIES

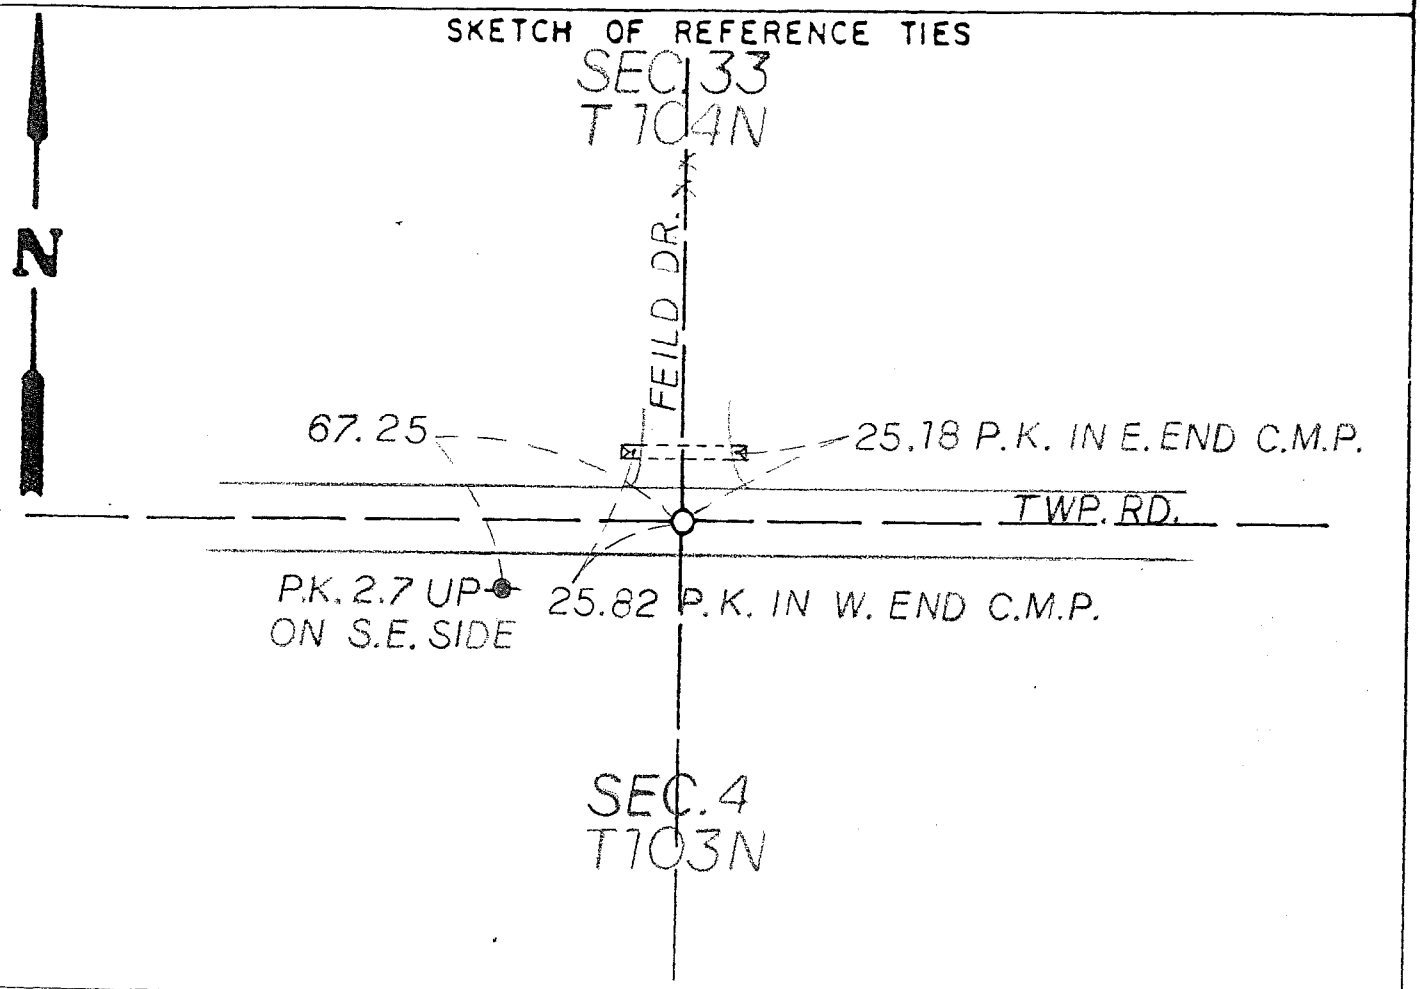

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

12-26-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.

Engineers / Architects / Land Surveyors / Planners

Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

North Quarter Corner Section 4, Township 103 North, Range 16 West, 5 P.M.

July, 1853	John Ball, Deputy Surveyor, set quarter section post, built mound with trench per instructions, drove charred stake in center and planted Osage Orange seed in southeast corner.
April, 1978	Zenk Read Trygstad & Associates, Inc. found an iron at the corner during a survey in Section 4.
September 7, 1990	Zenk Read Trygstad & Associates, Inc. excavated a trench 3.5 feet deep from 4 feet north to 5.5 feet south of center line and 8 feet east to 4 feet west of the fence line north. A 5/8 inch rod was found at the surface on line with centerline and fence line north and it was removed during excavation. An analysis of the record and survey data indicates the 1978 iron to be midway between section corners and the road centerline. The iron rod also agrees with the fence line north. The iron rod is accepted as marking the location of the original Public Land Survey Corner.