CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 5, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-7-90 found 2 1/2" SQUARE BAR

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-7-90 placed COUNTY CAP ON 1/2" PIPE OVER BAR

SKETCH OF REFERENCE TIES

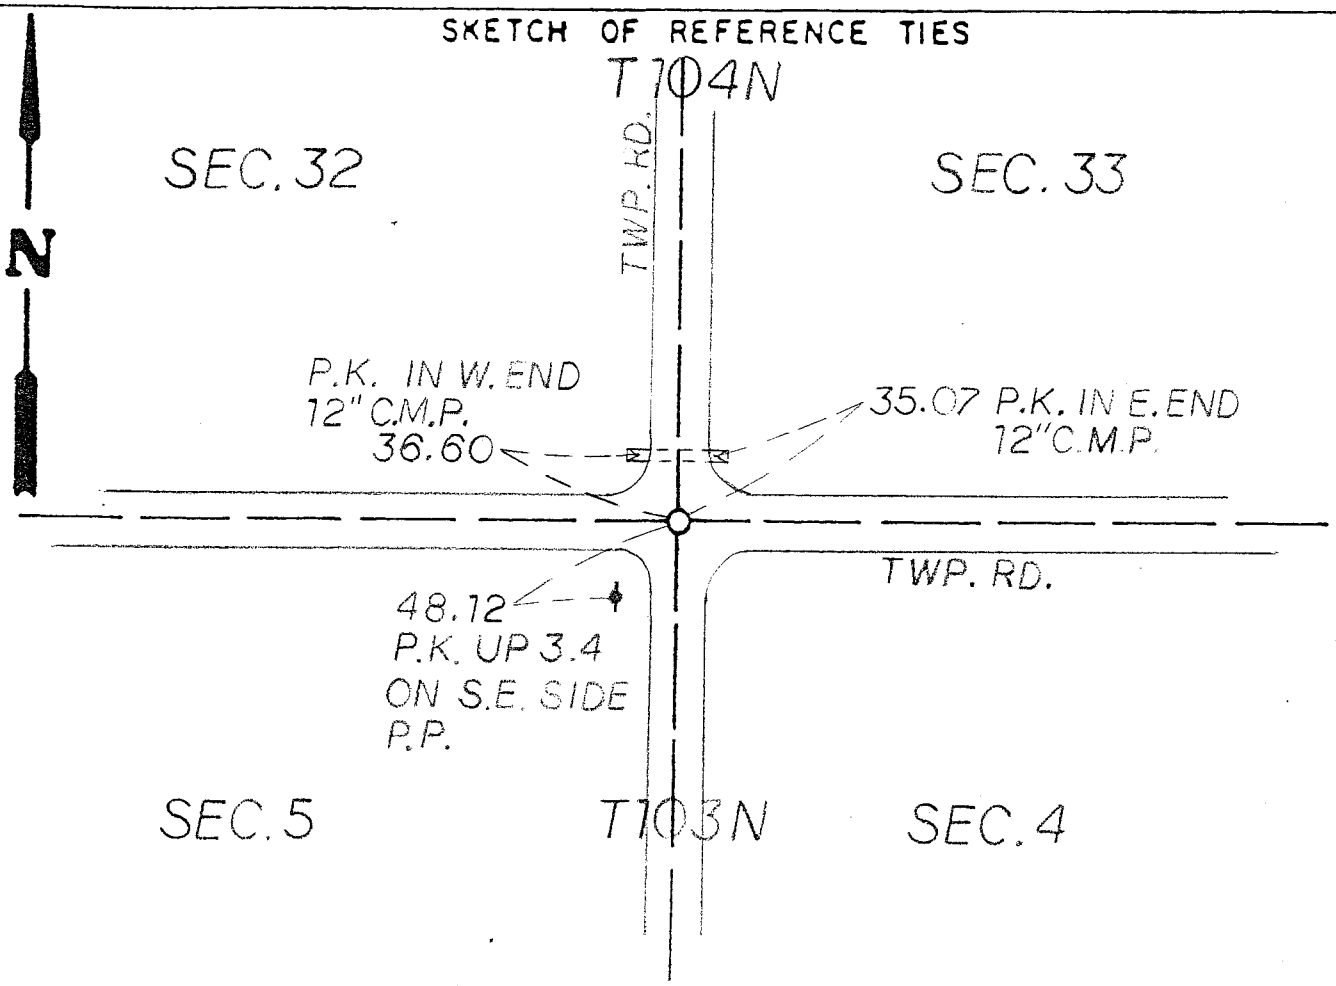

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-26-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

Northeast Corner Section 5, Township 103 North, Range 16 West, 5 P.M.

July, 1853	John Ball, Deputy Surveyor, built mound with trench per instructions, drove charred stake in center and planted Osage Orange seed in southeast corner.
June 30, 1879	Clausen Field Notes show a government post in place and used to subdivide Section 32.
September 7, 1990	Zenk Read Trygstad & Associates, Inc. excavated a trench 4 feet deep from 1 foot south to 4 feet north and center line to 3 feet west of the intersection of the township roads. A 2 1/2 inch square iron bar was found 2.8 feet deep and 2.8 feet north and 1 foot west of the intersection. An analysis of the record data shows no indication of the origin of the bar. The bar is accepted as the location of the original Public Land Survey Corner.