Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 8, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-27-91 (DATE) found a HARRISON CAST IRON MONUMENT OVER A STONE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

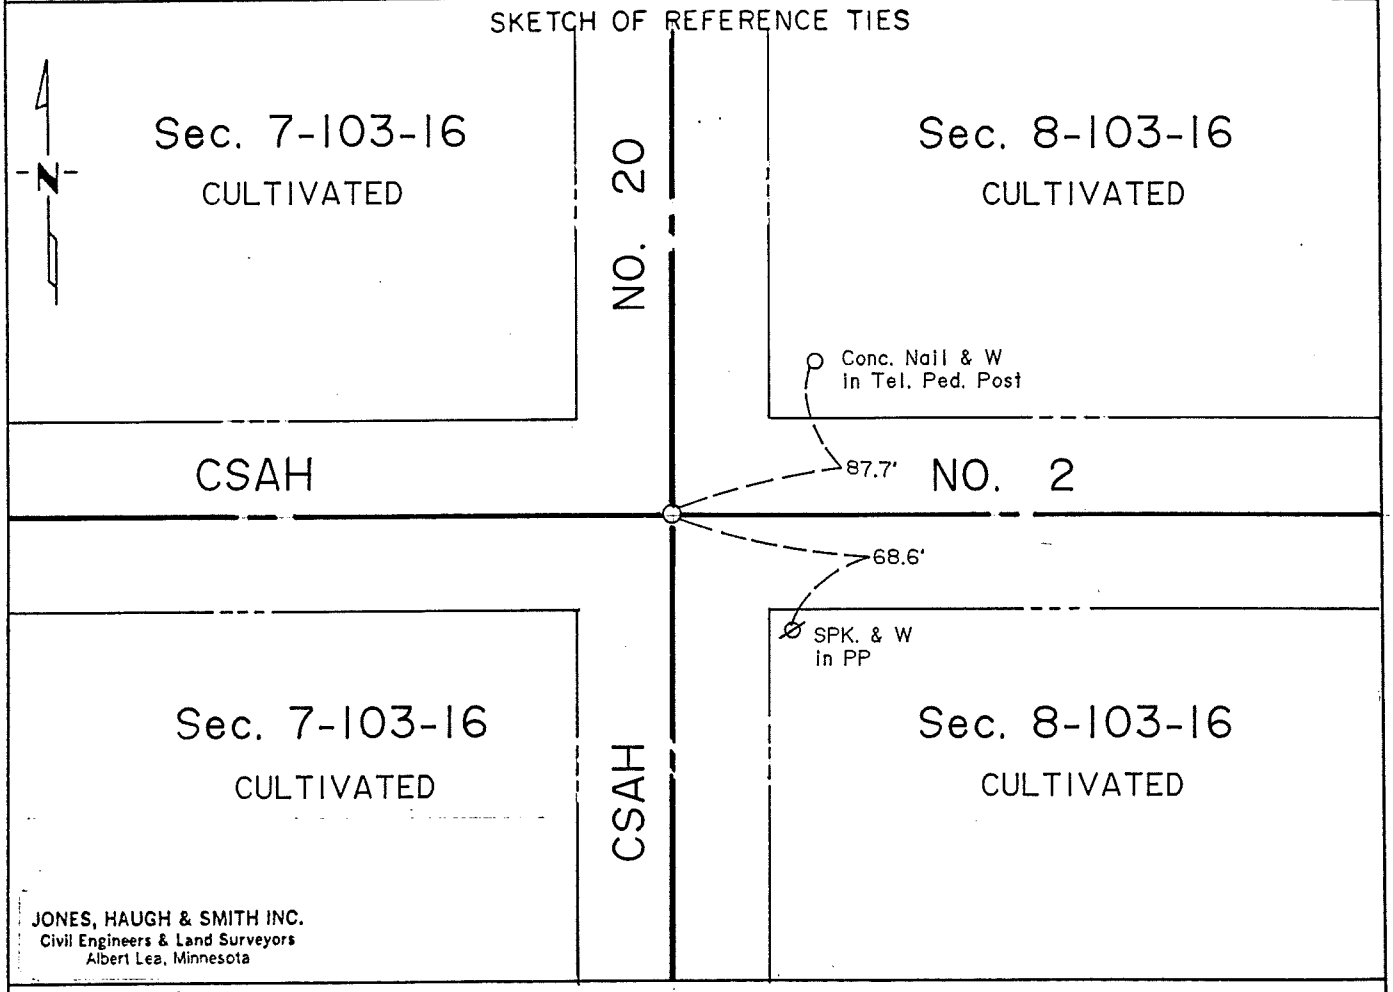

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, County Surveyor from 1880-1892, field notes show a stone inplace.

1940 Book 'A' of the Mower County Engineer's Office show a stone inplace.

1945 Book 'A' shows an iron rod inplace and the following ties were taken:
47.1' SW to CFP
59.0' NW to 3rd St. FP
46.8' SE to CFP
44.1' NW to TP
72.3' SSW to "C-10" sign
89.0' NNW to nearest leg of mail box
75.7' SE to 3rd St. FP (by guy wire)

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe and uncovered a harrison cast iron monument over a stone on centerline centerline of north-south-east-west roads. Left monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.