Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 9, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of mower


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a 6"ø CONCRETE MONUMENT IN CLAY TILE OVER A POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT OVER STONE AND SET CONCRETE MONUMENT ON EAST SIDE OF STONE FOUND.

SKETCH OF REFERENCE TIES

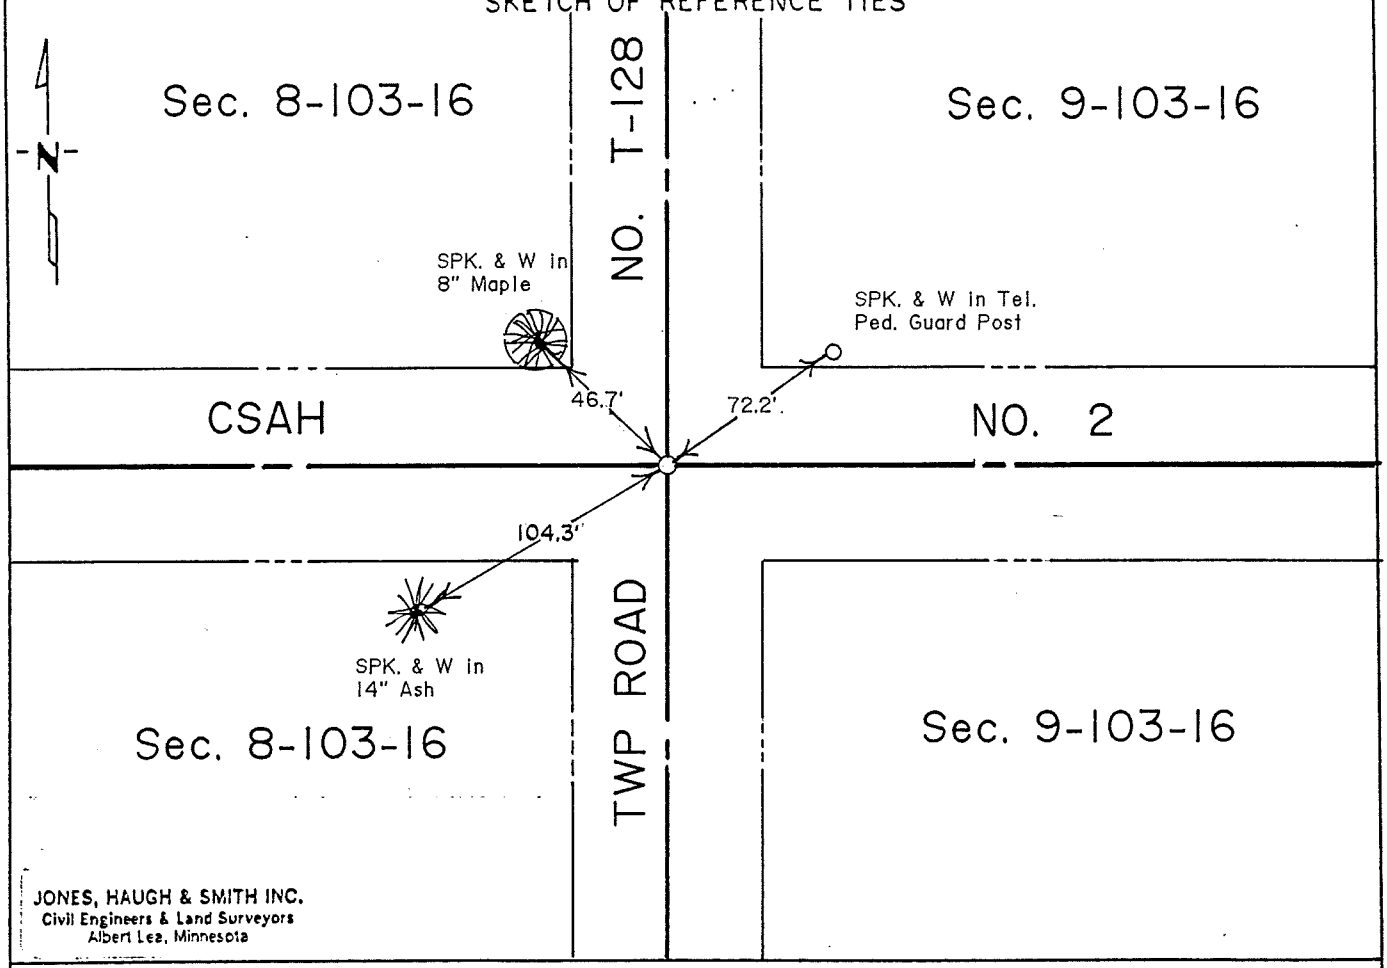

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, County Surveyor from 1880-1892, notes show a government post in place.

1935 Book 'A' of the Mower County Engineer's Office show the following ties were taken:
42.8' SW to CFP 34.5' NW to Maple 34.0' to CFP

1938 Book 'A' shows a large stone inplace and a monument placed over stone. The following ties were taken:
65.2' SW to 3rd FP Twp Rd
72.6' SW to tall Cottonwood
93.4' NW to SE cor farm house
69.8' NNW to 24" Elm
67.8' NE to 3rd FP

1946 Book 'A' notes show a concrete monument inplace and the following ties were taken:
69.9' NNW to 18" Elm (BM) 54.1' NE to TP
72.5' SW to 18" Cottonwood 52.5' SE to CFP

1978 Jones, Haugh & Smith crew placed a PK nail and washer on centerline of north-south-east-west roads. The following ties were taken:
Spk & W SW side TP NW 53.8'
Spk & W SE side TP NE 61.2'

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe on centerline centerline of north-south-east-west roads and uncovered a 6" diameter concrete monument in clay tile. Continued digging and found a pointed field stone 3 feet deep in virgin soil under the clay tile. Set concrete monument on east side of stone and set cast iron monument at road surface over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.