Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-6-95 (DATE) found a Corner Fence Post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-6-95 (DATE) placed a 5/8 iron on west side 8" CFP in N-S fence line

SKETCH OF REFERENCE TIES

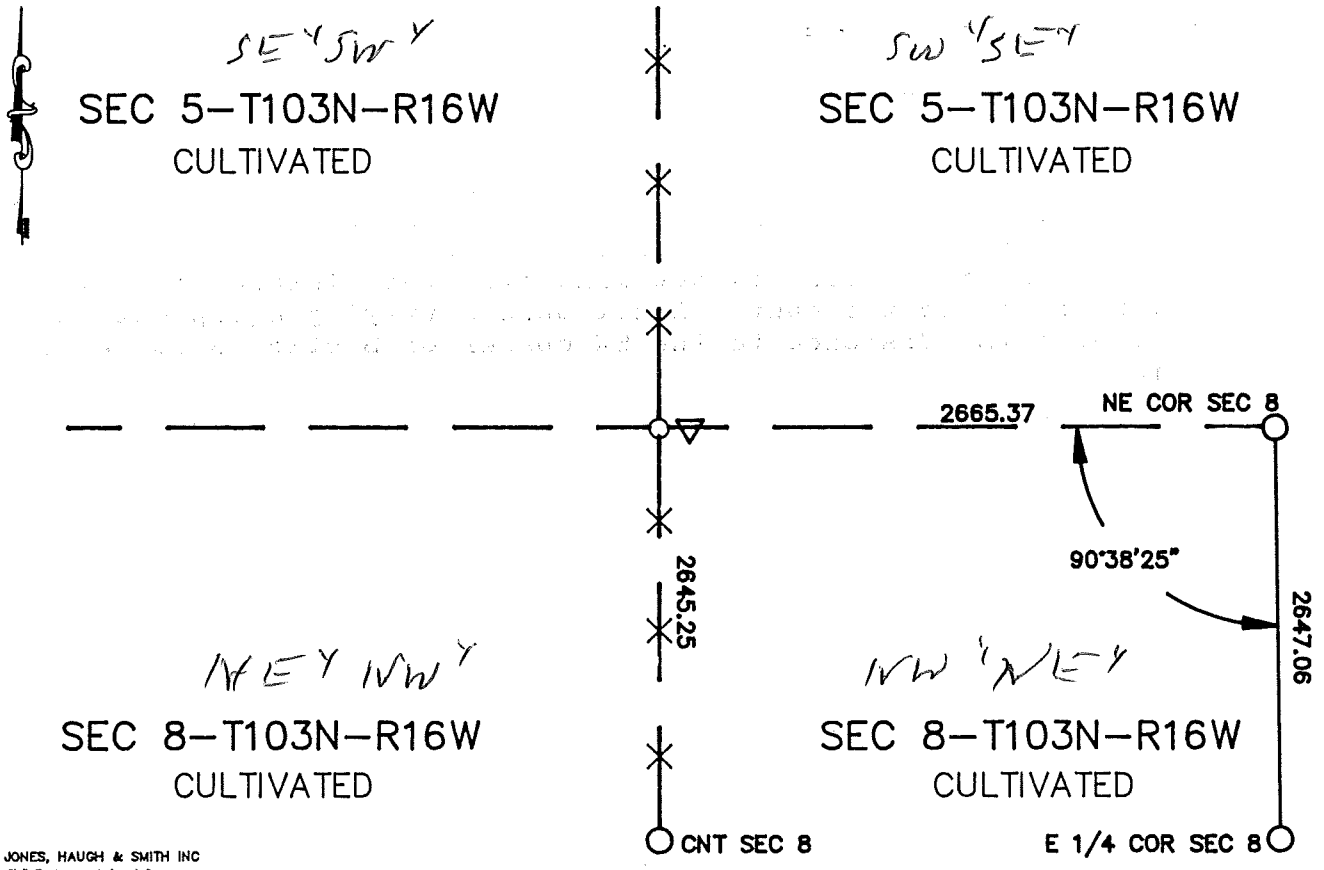

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-24-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 o'clock A.M. on the 24 day of February A.D., 19__

COUNTY RECORDER Charles Enger

By _____, Deputy

DOCUMENT NO. 435084

Book 86 Page 250

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above names sources.

1892 Notes of Clausen indicate a government marker inplace at the N 1/4. 40.42 (2667.72) chains west of the northeast corner of Section 8.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a corner fence post in the north-south fence line. Accepted corner fence post as best evidence of the corner and set a 5/8" iron on the west side of the fence post. Electronic surveying equipment was used to measure the distance to the northeast corner and center of Section 8. The distances are as follows:
2665.37'to the northeast corner vs. 2667.72' given in Clausens notes and 2645.25' to the center of Section 8

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 251