Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 6" x 10" rock 2.0' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on S. side rock

SKETCH OF REFERENCE TIES

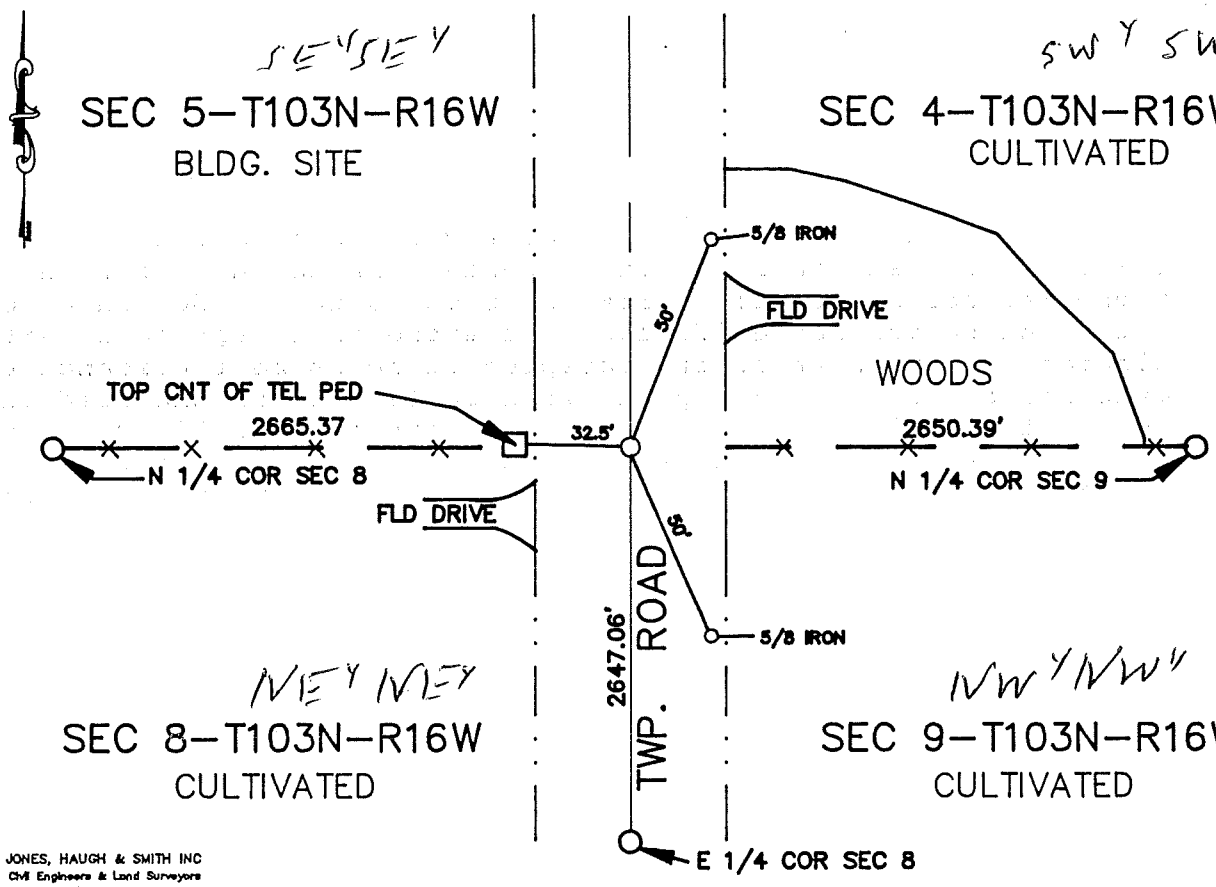

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 342

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-3-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of Mar A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435274

M.H.D. FORM NO. 2105

BK 86 Misc Pg 342

STATEMENT OF EVIDENCE

NE cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1892 Clausen notes indicate a post inplace at this location.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of township road and in line with fence lines to the east and west. A 6"x10" stone was found 2.0 feet below the road surface. Continued digging but found no further evidence. Accepted the stone as best evidence of the corner. Stone lies in line with fences to the east and west as well as the centerline of the township road. A 5/8" iron capped RLS 13807 was placed on the south side of the rock. Another iron was placed over the stone 4" below the road surface. Electronic surveying equipment was used to measure the distance to the N 1/4 Section 8, the N 1/4 Section 9 and E 1/4 Section 8. The distances are as follows:

2665.37' W to the N 1/4 cor Sec 8
2650.39' E to the N 1/4 cor Sec 9
2647.06' S to the E 1/4 cor Sec 8

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.