Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 10, Township 103N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-27-1991 (DATE) found a 5/8"ø x 8" IRON OVER 6"ø CLAY TILE, WITH A 1/2"ø IRON CAST IN THE CENTER.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-27-1991 (DATE) placed a CAST IRON MONUMENT OVER MONUMENTS FOUND

SKETCH OF REFERENCE TIES

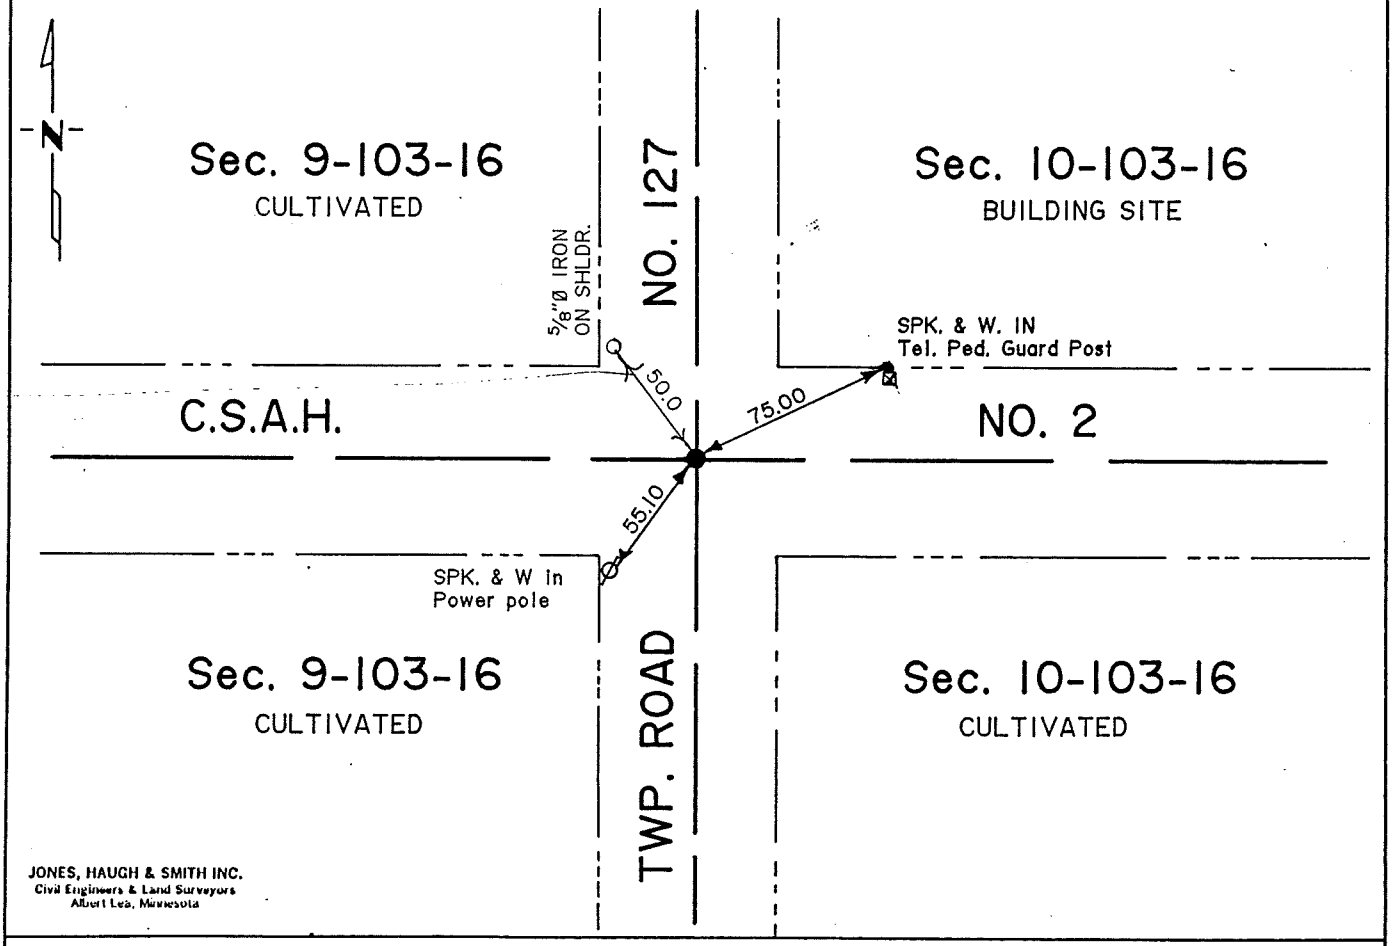

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-20-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 10-103-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1938 County Grading Plan shows a stone, and three wood stakes 3 feet below road surface. A monument was set over stone and the following ties were taken:
55.8' SE to 2nd fence post on Twp Rd
57.8' SW to 2nd fence post on Twp Rd
68.4' NW to 3rd fence post on Twp Rd
79.4' NE to 3rd fence post on Twp Rd

1946 Recorded in Book "A" in the Office of the County Engineer it shows a monument found and the following ties were taken:
47.5' NW to fence post
46.0' NE to fence post
37.6' SW to telephone pole
45.0' SE to fence post
46.6' SW to fence post

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Mower County Surveyor RLS 13807, dug with the County backhoe on centerline centerline on north-south-east-west road and uncovered a 5/8" diameter x 18" long iron on road surface. Continued digging and uncovered a 1/2" diameter iron cast in the center of a 6" diameter concrete monument 3 feet below road surface. Monument agrees with past records. Accepted as best evidence and set a cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.