Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-1995 (DATE) found a N-E-W FENCE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-1995 (DATE) placed a 5/8 IRON ON W. SIDE CFP

SKETCH OF REFERENCE TIES

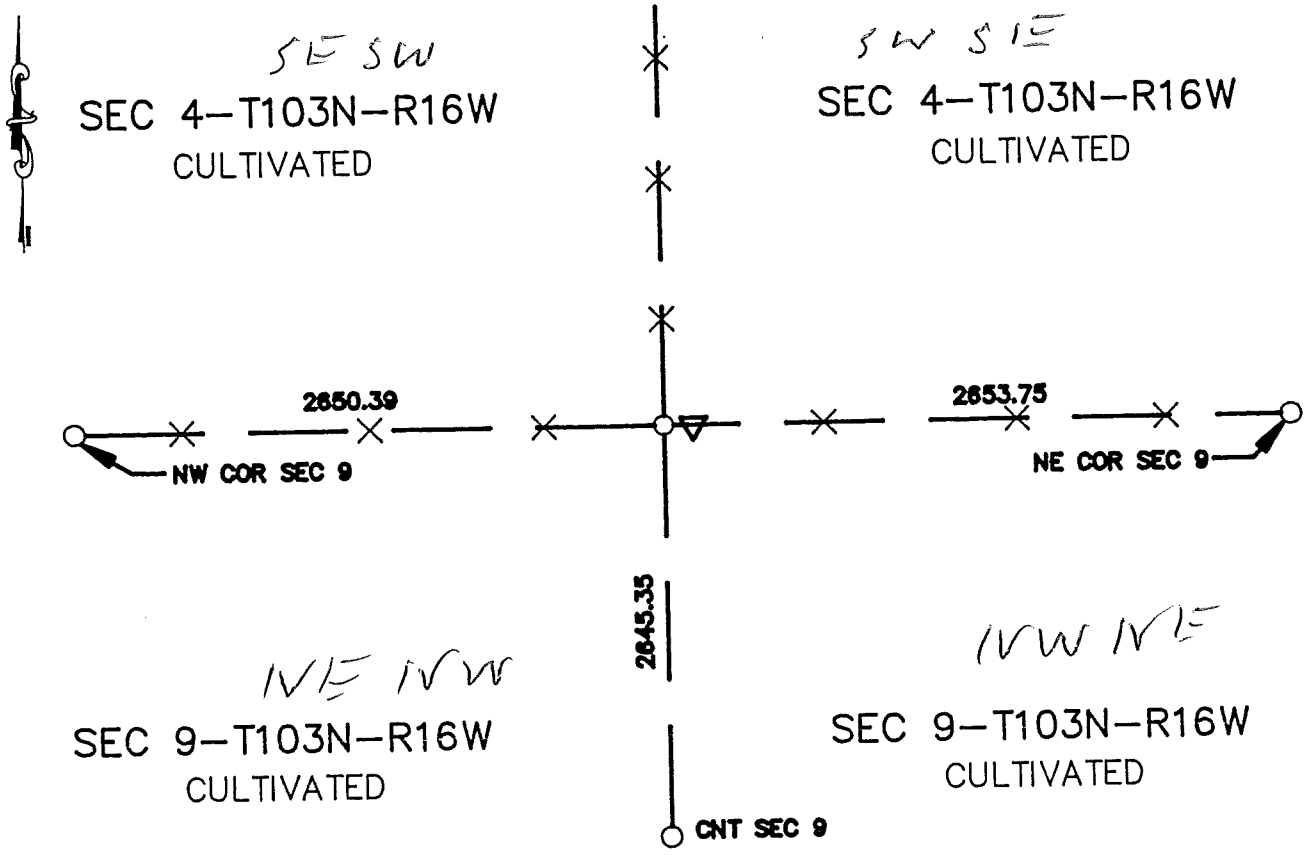

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-15-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 20 day of March A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 435518

415

M.H.D. FORM NO. 2105

BOOK 86 PAGE 415

Book 86 Misc Page 415

STATEMENT OF EVIDENCE

N 1/4 cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a north, east & west fence intersection at this location. No other evidence was found and therefor the fence intersection was determined to be the best evidence of the corner. A 5/8" iron was set on the west side of the corner fence post. Electronic surveying equipment was used to measure the distance to the northwest corner, northeast corner and center of Section 9. The distances are as follows:

2650.39' W to the NW cor Sec 9
2653.75' E to the NE cor Sec 9
2645.35' S to the center of Sec 9

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

JONES, HAUGH & SMITH INC.
CONSULTING ENGINEERS
515 SO. WASHINGTON
ALBERT LEA, MINNESOTA 56007