Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a HARRISON MONUMENT OVER A 3/4"ø IRON DRIVEN INTO A 4" CHARRED STAKE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT OVER MONUMENT FOUND.

SKETCH OF REFERENCE TIES

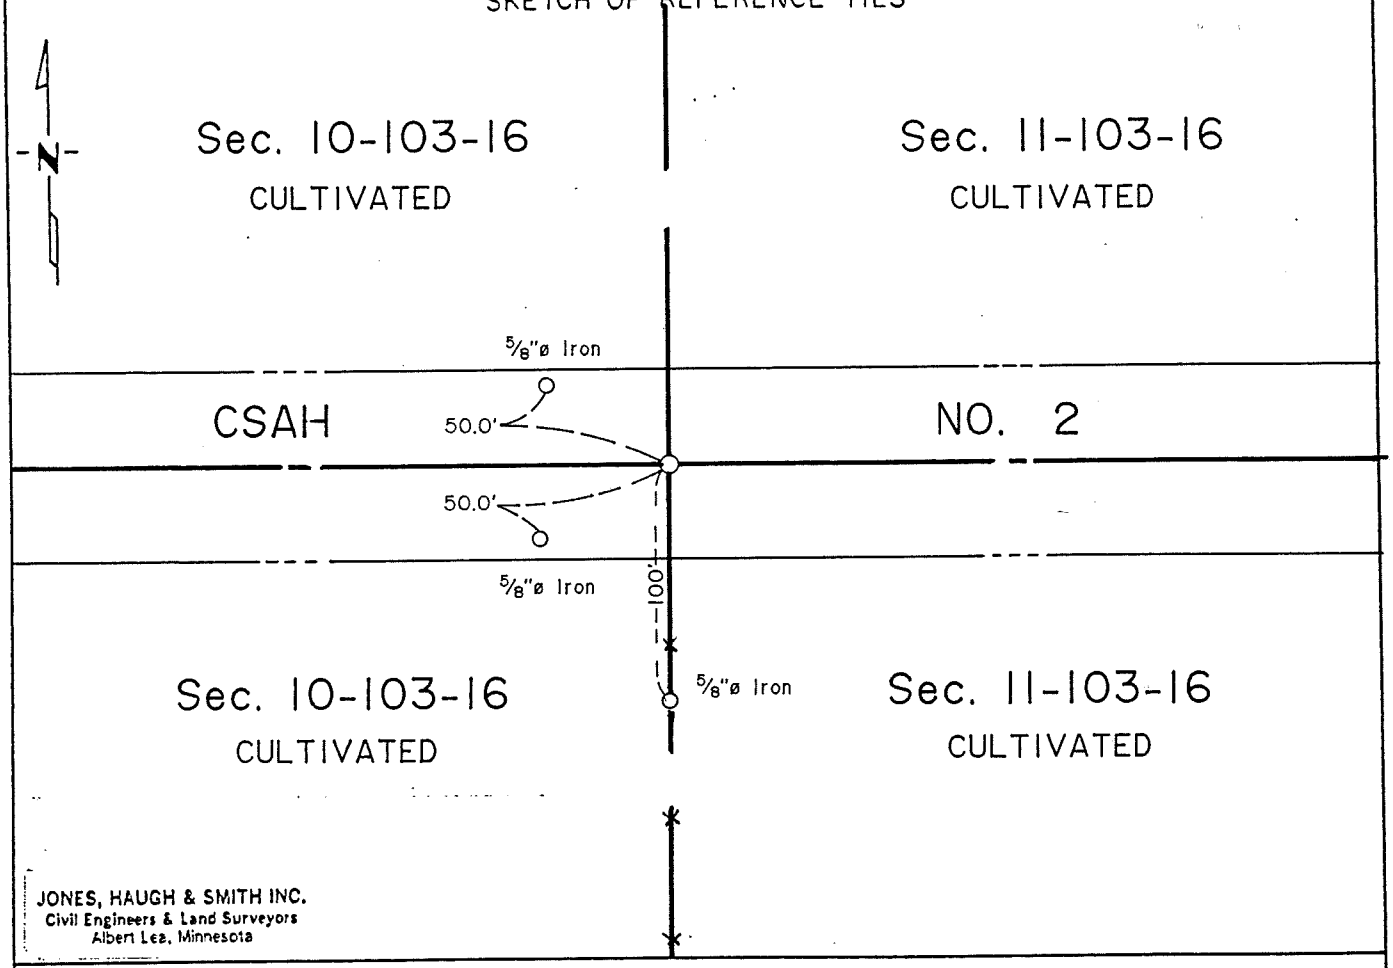

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 11-103-16

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book 'A' of the Mower County Engineer's Office show the following ties:
37.5' South to Cottonwood
58.5' SW to Cottonwood
29.4' North to TP

1938 Book 'A' notes show a concrete monument inplace and the following ties were taken:
29.8' N to TP
50.9' S to twin Cottonwood
89.6' WSW to Cottonwood
54.3' SW to Cottonwood
33.7' N to CFP
59.0' N to 3rd FP

1982 Jones, Haugh & Smith crew found a 2 foot long wood post with field stones around base. Placed a 5/8" diameter iron in center of post 1.0 feet deep in line with fence south and 0.5' south of road centerline. The following ties were taken:
5/8" diameter iron 0.5' above ground 46.2' south
Concrete nail & washer 10' N & 10' E

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe on centerline of east-west road in line with fence south and uncovered a harrison cast iron monument 0.5 feet deep. Continued digging and found a 3/4" diameter iron driven into a 4" charred stake two feet deep in virgin soil. Left monument as found and set a cast iron monument over.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

TIE BOOK P 39

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W. 1/4 Corner of Section 11, Township 103, Range 16, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☑ On 4-22-82 (DATE) found a 3" DIA. WOOD POST WITH FLD STONES AROUND BASE

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 4-22-82 (DATE) placed a 5/8"Ø X24" LONG IRON - CAPPED RLS 13807, OVER WOOD POST.

SKETCH OF REFERENCE TIES

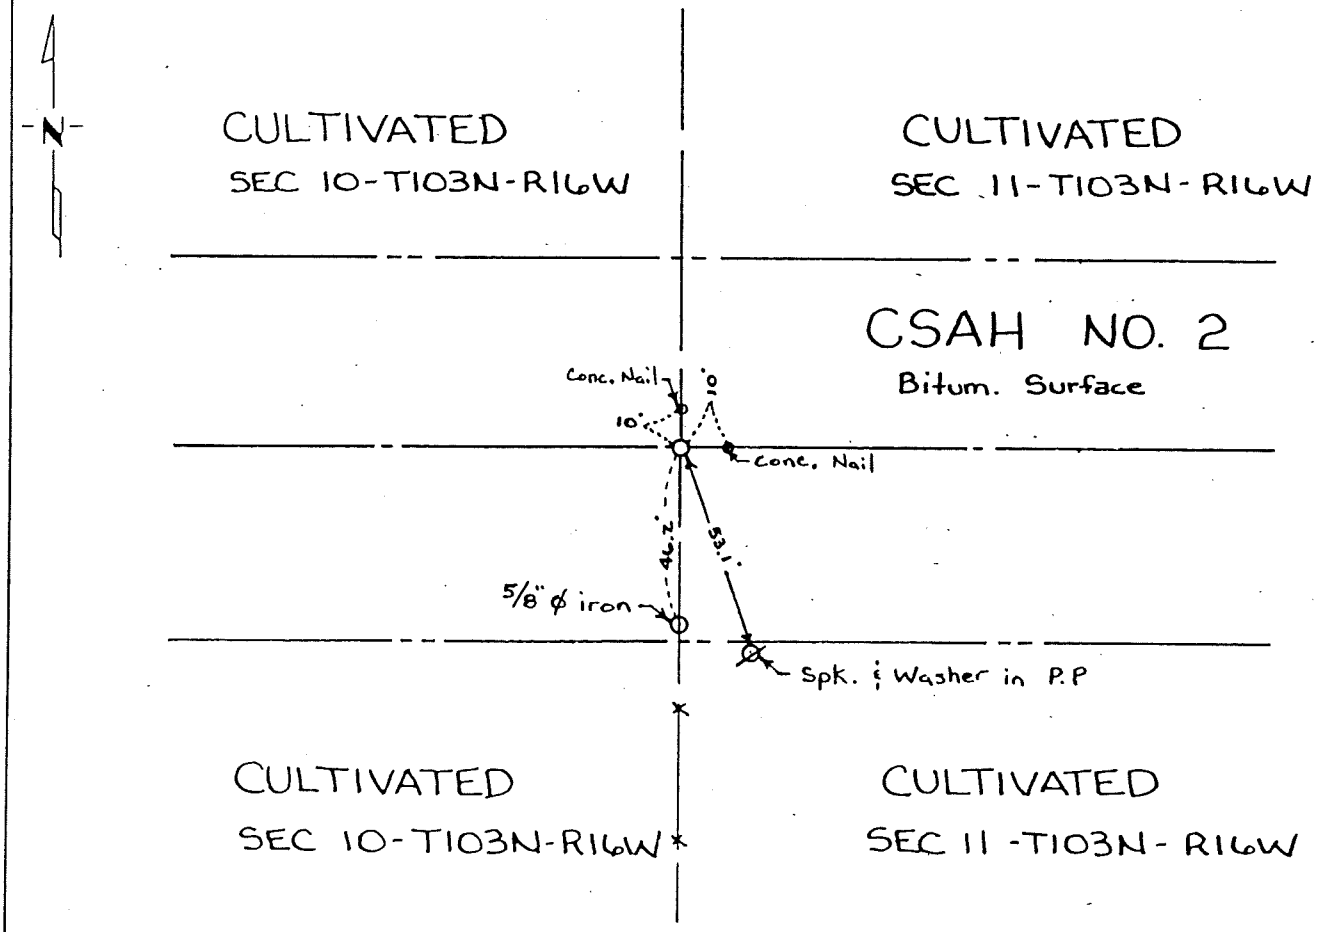

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-26-82 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the ____ day of _____ A.D., 19__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105