Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a No evidence of PLS cor

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron N side fld stone in nest in N-S fnc ln

SKETCH OF REFERENCE TIES

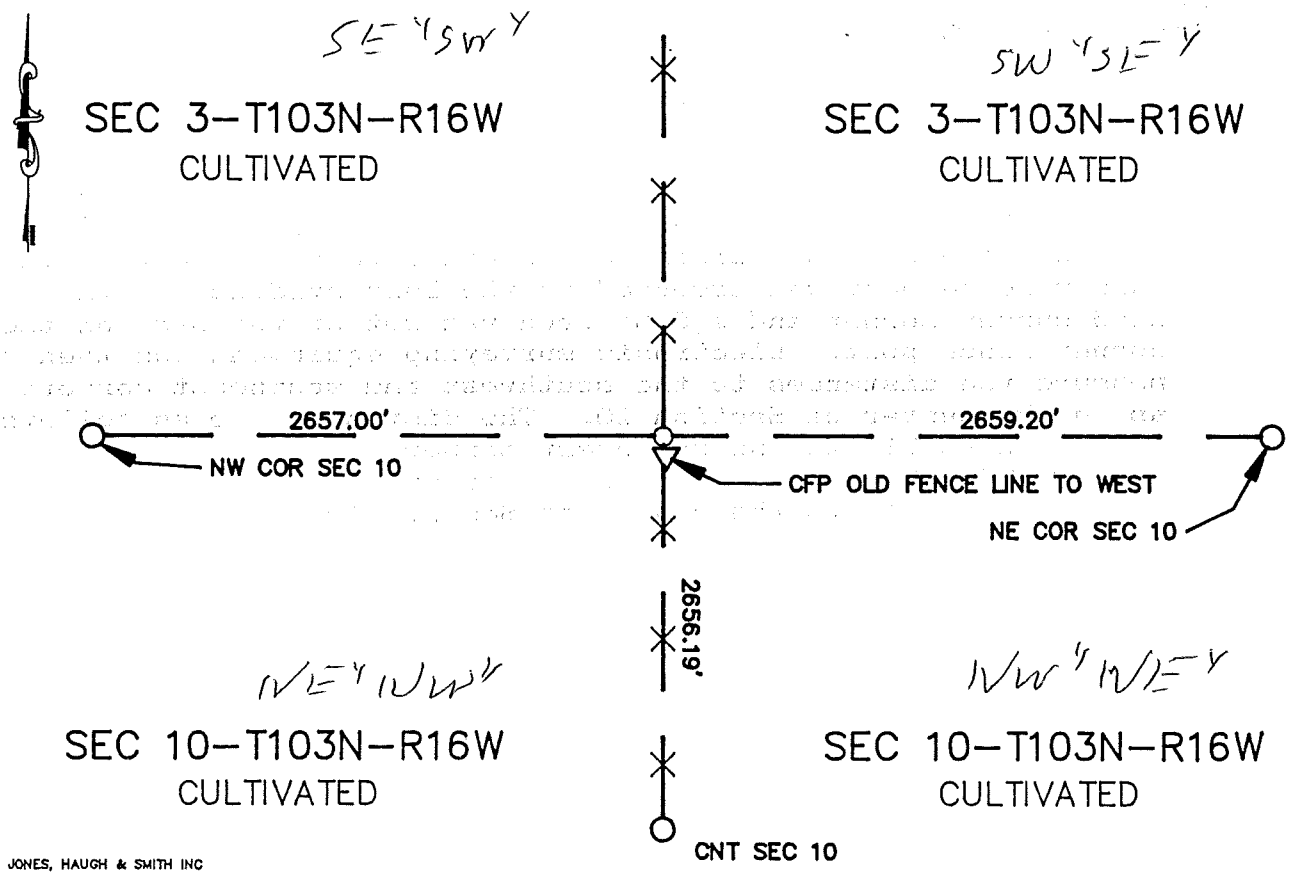

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-25-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 a.M. on the 24 day of February A.D., 1995

COUNTY RECORDER Charles Engler

By Sheryl A Rayburn Deputy

DOCUMENT NO 45508

M.H.D. FORM NO. 2105

Book 86 Page 256

STATEMENT OF EVIDENCE

N 1/4 cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found no evidence of the original corner. The corner was set using electronic surveying equipment on the north side of a field stone, within a nest of field stones in the existing north-south fence line, at what appears to be the location of an old corner fence post for a fence line to the west. Electronic surveying equipment was used to measure the distances to the northeast and northwest corners. The distances are as follows:

2657.0' west to the northwest corner
2659.2' east to the northeast corner
2656.19 to the center of section

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 257