Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE 1/4 Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a N-S fence line

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron at N-S fence line

SKETCH OF REFERENCE TIES

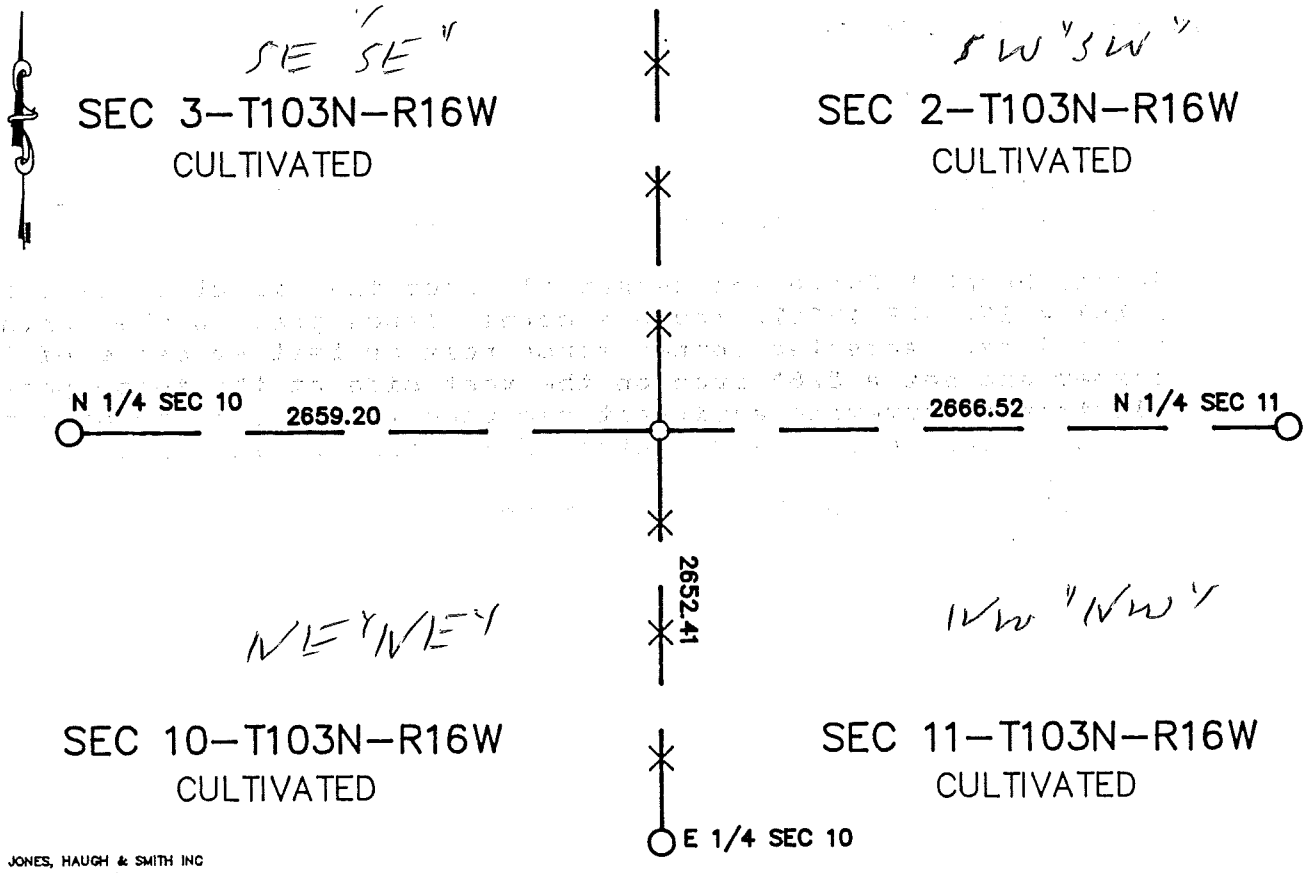

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-24-94

Registration No. 13807

☐ Land Surveyor, ☒ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 a.M. on the 24 day of February A.D., 1995

COUNTY RECORDER Charles Enger

By Cheryl A. Taylor, Deputy

DOCUMENT NO. 455085

M.H.D. FORM NO. 2105

Book 86 Page 252

STATEMENT OF EVIDENCE

NE cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found no evidence of the original corner. Electronic surveying equipment was used to set the corner using a single proportion between the E 1/4 corner of Section 3 and the E 1/4 corner of Section 10 and using the existing north-south fence line to control the east-west position. This fits 1/4 miles in the adjoining sections and the fence lines in Section 3. A 5/8" iron was set at the location of the corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 250