Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 11, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 8" x 10" rock 1.7' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on N. side rock

SKETCH OF REFERENCE TIES

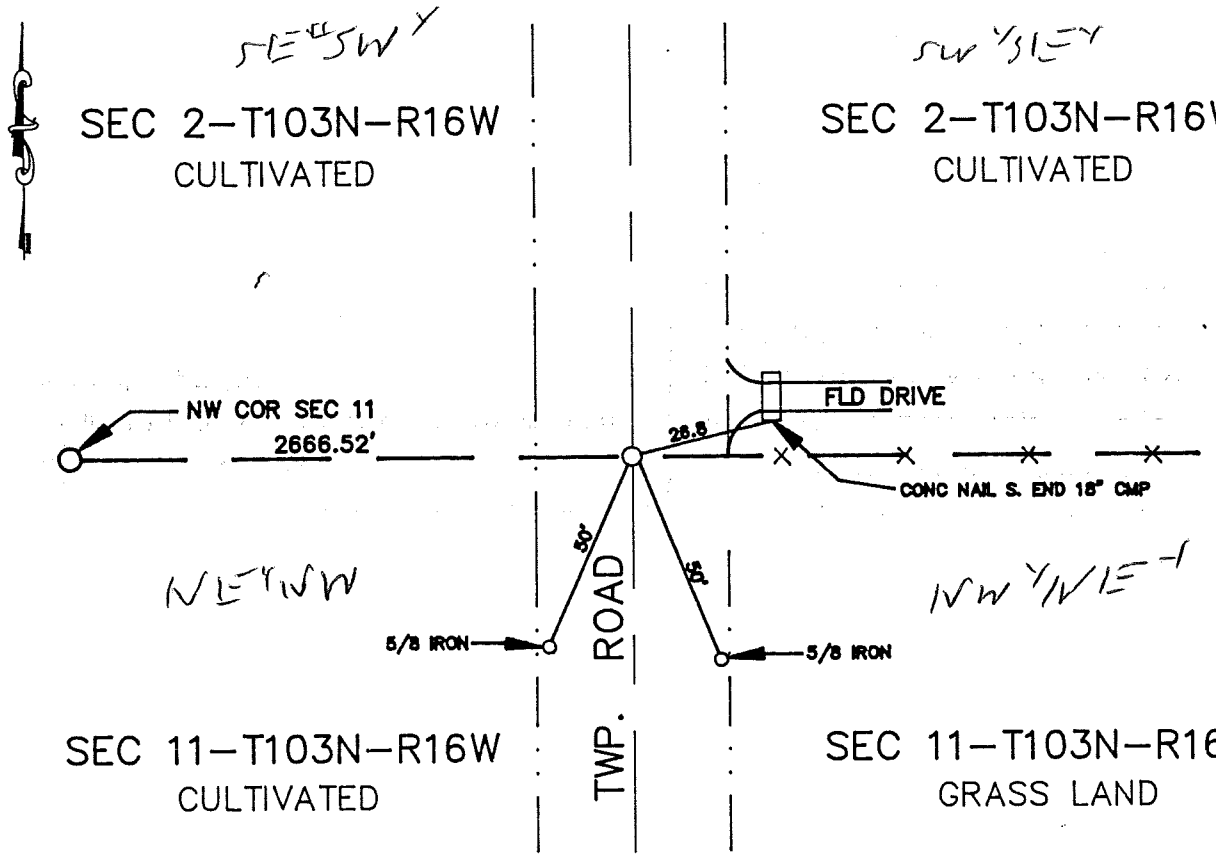

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

BOOK 86 PAGE 244

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-21-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435069

M.H.D. FORM NO. 2105

Book 86 Misc Page 244

STATEMENT OF EVIDENCE

N 1/4 cor Sec 11-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of a township road and in line with the fence line to the east. A 8"x10" rock was found 1.7 feet below the road surface, .50 feet below the old roadbed. Rock is in the centerline of the road and in line with the fence to the east. Continued digging and found no further evidence. The rock was accepted as the true corner and a 5/8" iron capped RLS 13807 was placed on the north side. Another 5/8" iron capped RLS 13807 was placed over the rock four inches below the road surface. Electronic surveying equipment was used to measure the distance west to the northwest corner of Section 11 to be 2666.52 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 245