Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 13, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-22-03 (DATE) found a 14" LONG PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-22-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

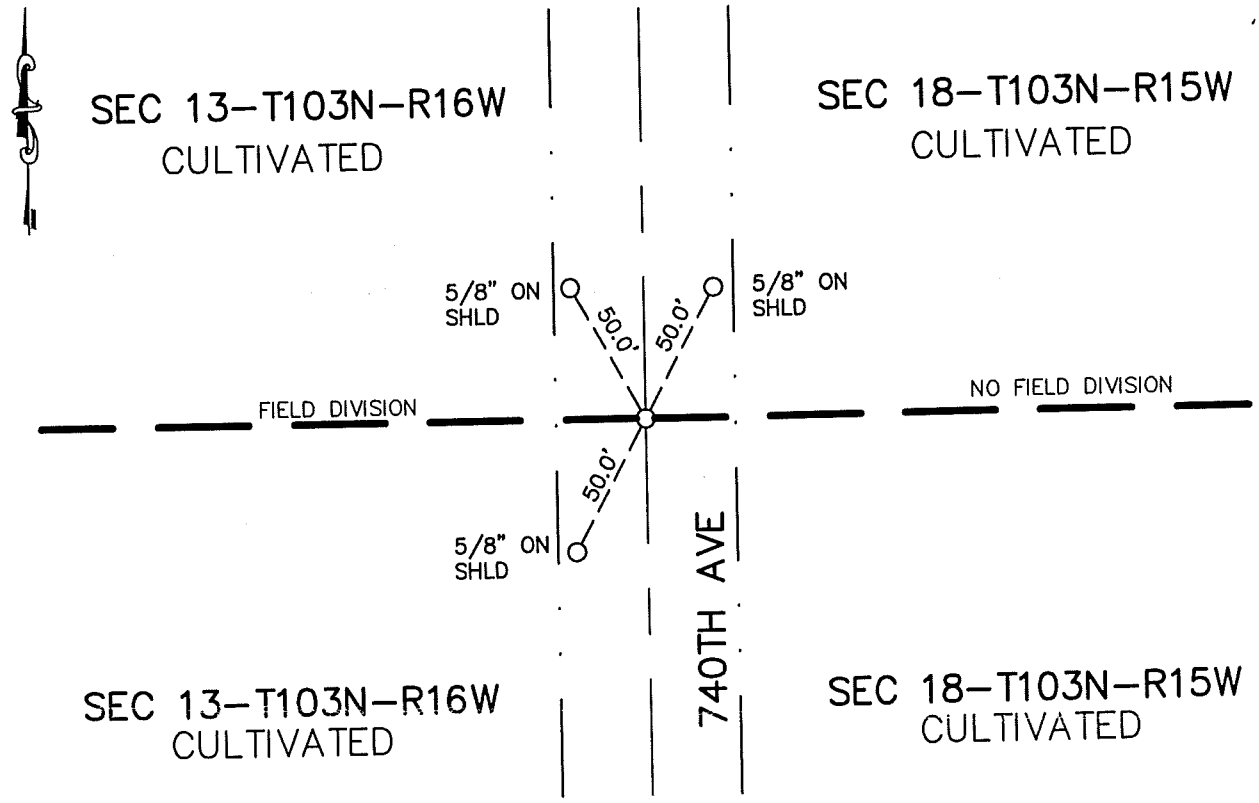

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-20-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 13-103-16

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

1997 GGG engineering, surveying, and planning could not locate corner. Set a temp, ½" inside diameter, iron pipe on centerline of North-South township road, and at a split between Northeast corner and Southeast corner. The split distance is 2649.98'. Found no occupation at 1/16th corners and no East-West occupation lines at center of section.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at location of pipe found. Found a 14" long pipe. Found no other evidence of PLS corner. Lowered the pipe and set 5/8"X16" iron with cast iron monument over pipe, 0.60' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.