Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 103N Range 16W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a Not set due to existence of manhole

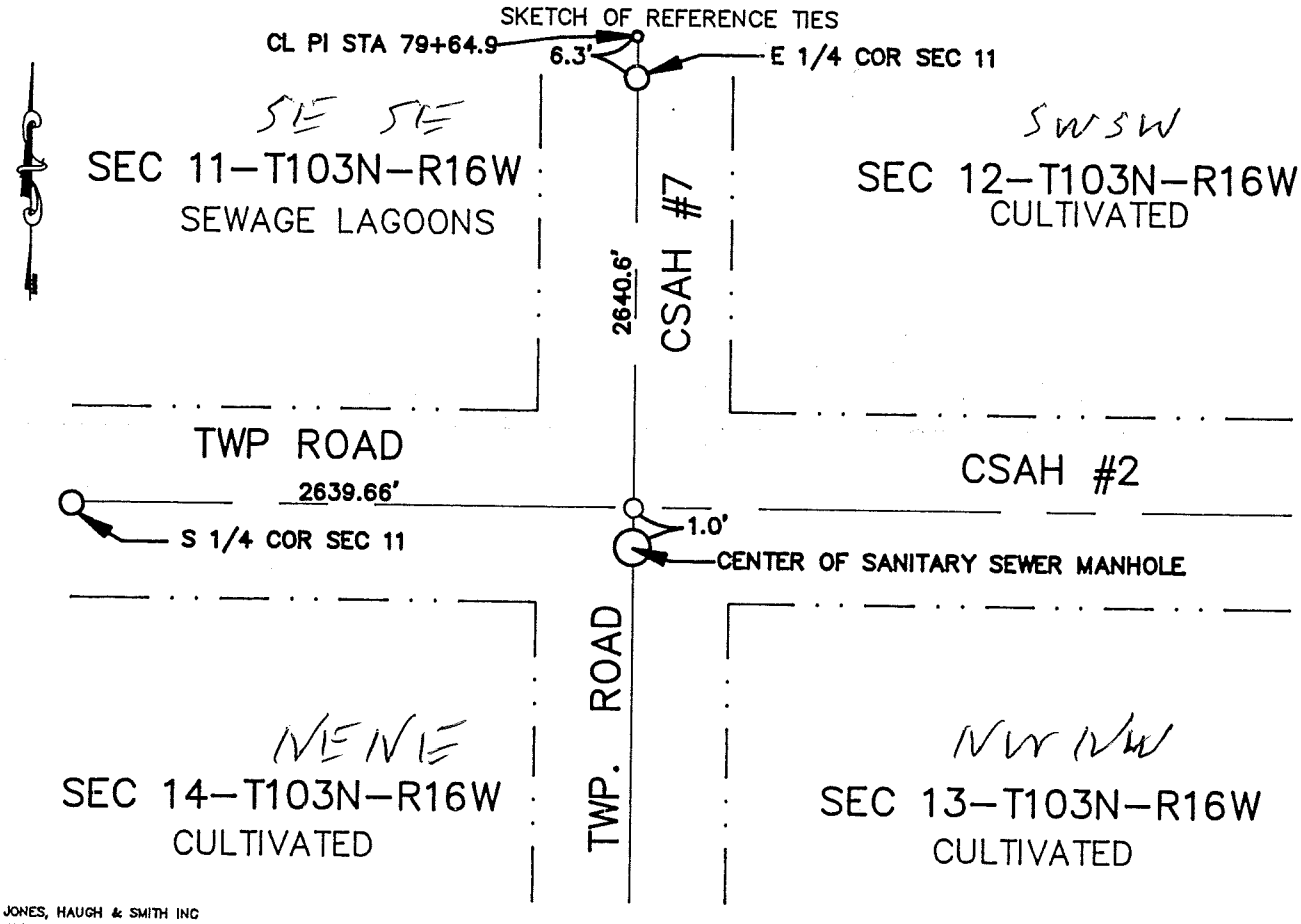

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 348

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-3-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 435277

M.H.D. FORM NO. 2105

BK 86 Misc Pg 348

STATEMENT OF EVIDENCE

SE cor Sec 11-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

Recorded in Book A in the office of the County Engineer it shows an inplace concrete monumented stamped 1957 and the following ties were taken:

44.2' SE to CRP
57.8' SW to TP
76.8' WNW to TP

The corner was destroyed during construction of sanitary sewer line.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, set corner using data from CSAH No. 7 and CSAH No. 2 right-of-way plans. The centerline of County Road No. 7 from the west was extended until it intersected with the centerline of County Road No. 2. This location fits the plan distance from the north when using stations on PI and the 1/4 section corner. There was no monument set as it would be in a sanitary sewer manhole. Electronic survey equipment was used to measure the distance to both the E 1/4 and the S 1/4 Section 11. The distances are as follows:

2640.6' N to the E 1/4 cor Sec 11
2639.66' W to the S 1/4 cor Sec 11

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.