Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 1 1/2 shaft in conc. 1' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on N. side shaft

SKETCH OF REFERENCE TIES

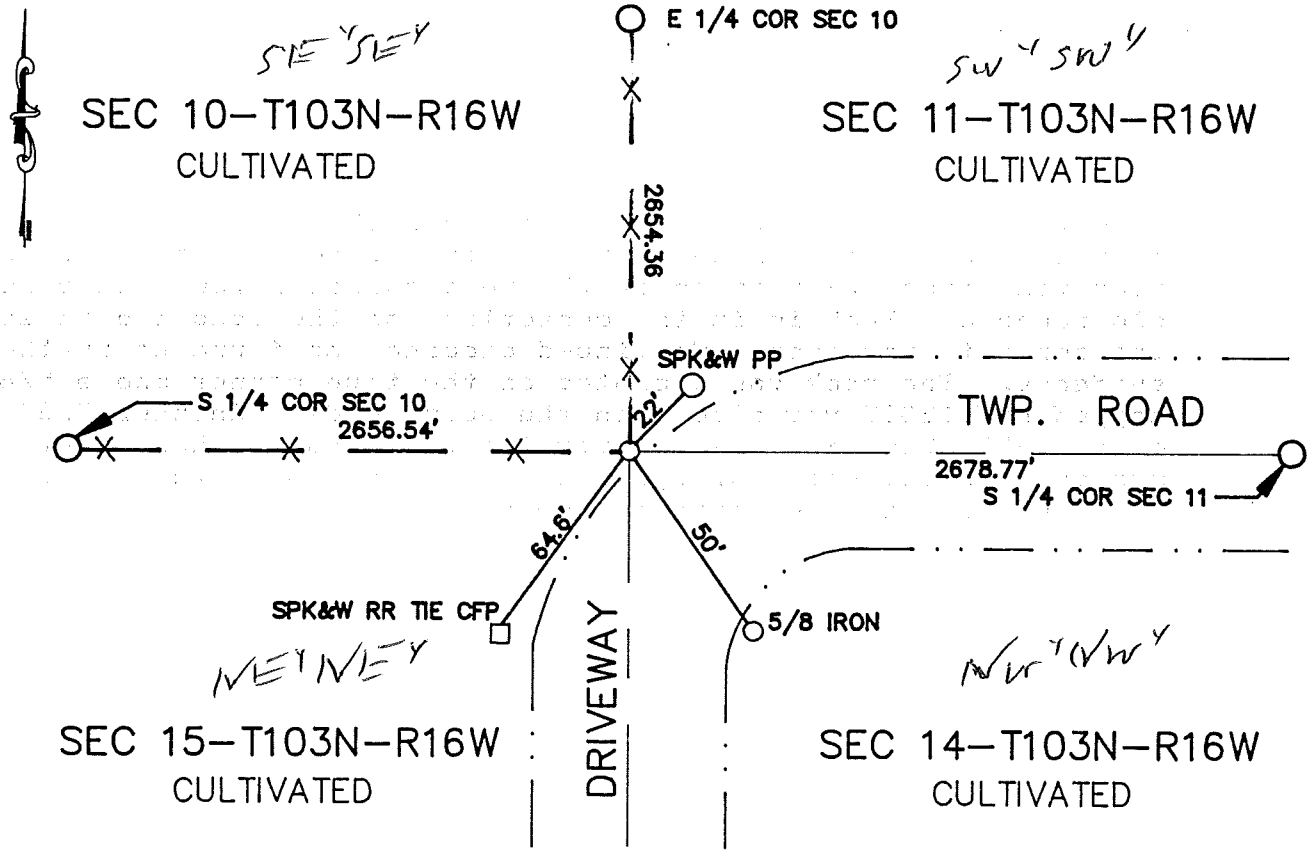

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 246

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-21-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 435070

M.H.D. FORM NO. 2105

Book 86 Misc Page 246

STATEMENT OF EVIDENCE

SE cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book A in the office of the County Engineer indicates a monument. No notes or ties were given.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with County backhoe at the intersection of a line fence west and north. Dug one foot below ground surface and found a 1 1/2" shaft in concrete. Accepted shaft as best evidence of the corner and placed a capped 5/8" iron (RLS 13807) on the north side. A capped 5/8" iron was also placed above the shaft approximately four inches below the surface. Electronic surveying equipment was used to measure the distance to the S 1/4 corner of Section 10, the E 1/4 of Section 10 and to the S 1/4 corner of Section 11. The distances are as follows:

2656.54' to the S 1/4 corner of Section 10
2659.36' to the E 1/4 corner of Section 10
2678.77' to the S 1/4 corner of Section 11

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.