Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a E-W Fence line

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron in E-W fence line

SKETCH OF REFERENCE TIES

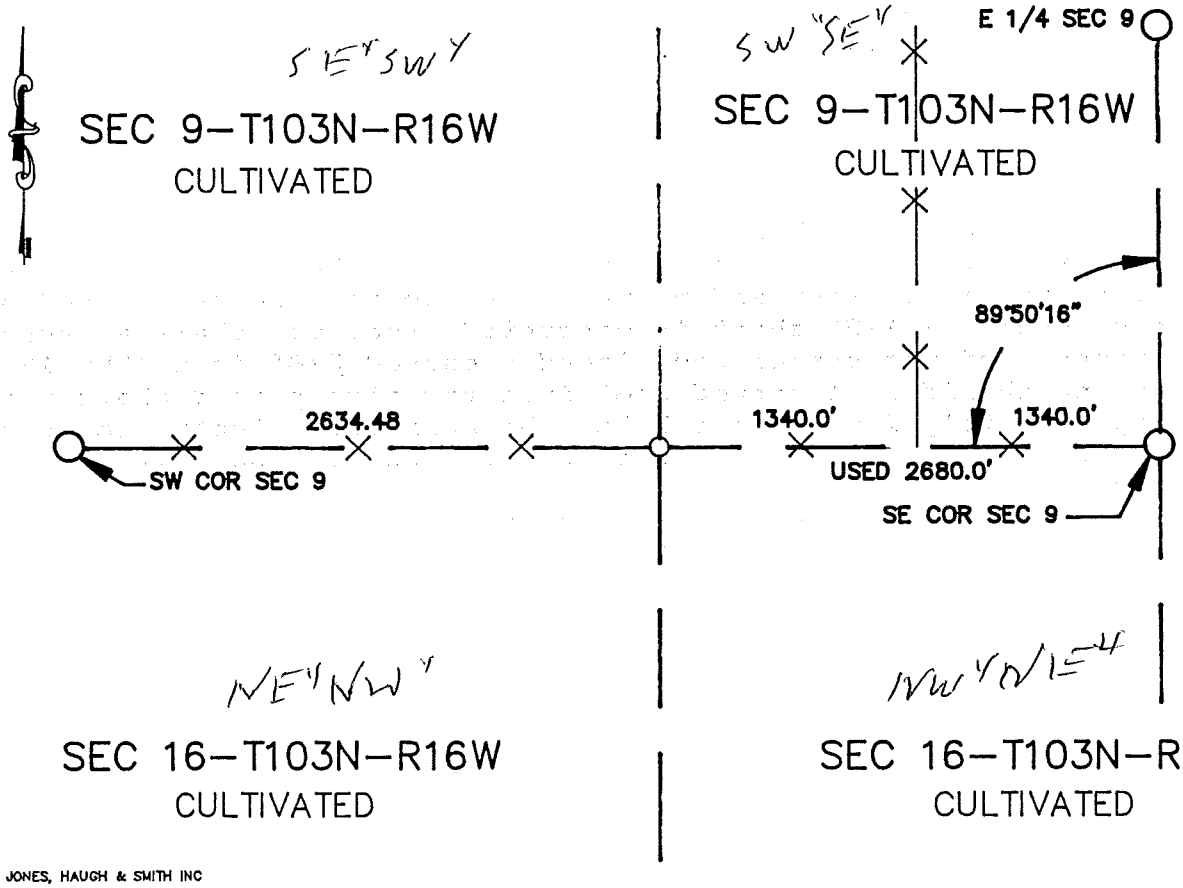

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

BOOK 86 PAGE 248

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 2-21-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Evgen

By Susan M. Burns, Deputy

DOCUMENT NO. 435071

M.H.D. FORM NO. 2105

Book 86 Misc Page 248

STATEMENT OF EVIDENCE

S 1/4 cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found an east-west fence line. No evidence of the original corner was found. A 5/8" iron was set in the east-west fence line by doubling over the distance from the 1/16 line fence to the east. Electronic surveying equipment was used to measure the distance to the SW corner of Section 9 to be 2634.48 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.