Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-6-95 (DATE) found a Corner Fence Post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-6-95 (DATE) placed a 5/8 iron west side RR tie CFP in N-S-E fence

SKETCH OF REFERENCE TIES

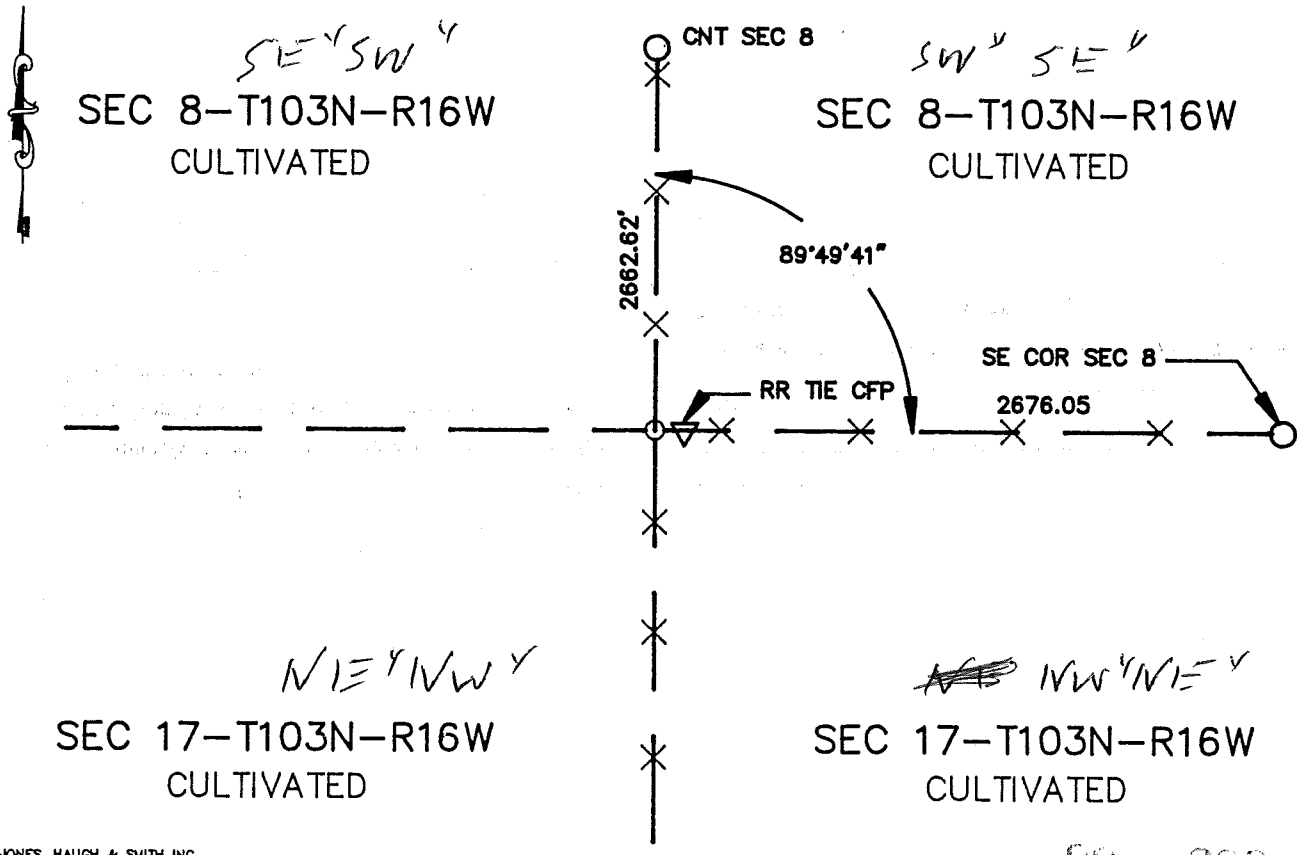


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 86 PAGE 338

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-3-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435272

BK 86 Misc Pg. 338

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above names sources.

1892 Notes of Clausen indicate a post inplace at the S 1/4.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a railroad tie corner fence post at the intersection of the north, south and east fence lines. Accepted corner fence post as best evidence of the original corner and set a 5/8" iron on the west side of the railroad tie. Electronic surveying equipment was used to measure the distance to the southeast corner of Section 8 to be 2676.05 feet and the center of section to be 2647.04 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 339

JONES, HAUGH & SMITH INC.
515 South Washington
ALBERT LEA MINNESOTA 56007