Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 24, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/17/1996 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/17/1996 (DATE) placed a CAST IRON MONUMEN

SKETCH OF REFERENCE TIES

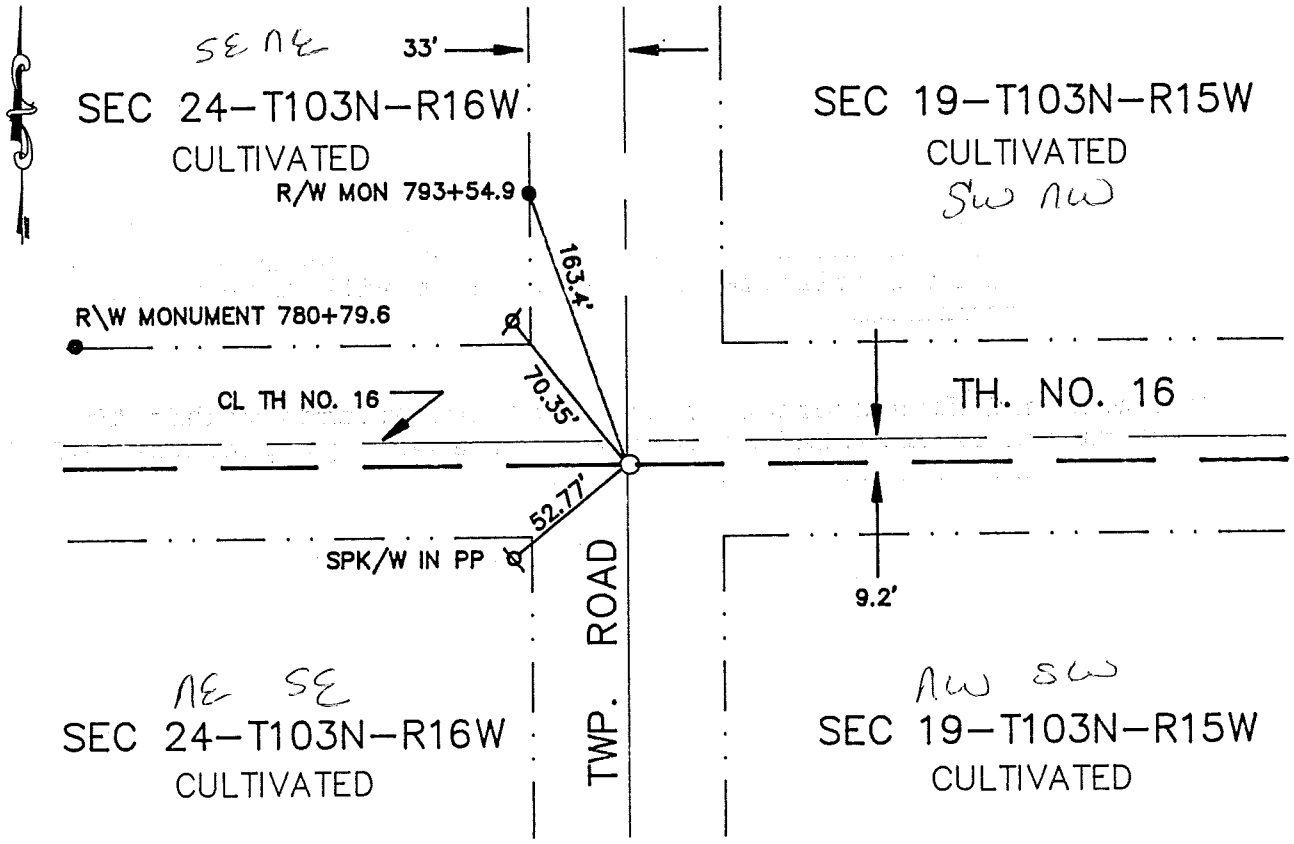

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 220

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-16-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447269

M.H.D. FORM NO. 2105

Book 92 Misc Page 220

E 1/4 Cor SEC 24-103-16

This corner was originally established by Deputy Surveyors John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1996 Jones Haugh and Smith records indicate a drill hole set by R/W stationing at this location.

1996 Ray Tucker records show he has used this corner for surveys in the NE 1/4.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a cast iron monument by using stationing from R\W markers and DOT coordinates for CL. Calculated position fit R\W markers and DOT CL within .07'. Set cast iron monument using mean position between DOT coordinates and found R\W markers.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.