Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 18, Township 103N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1966± (DATE) found a 8" FIELD STONE AND 2X2 HUB

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-14-03 (DATE) placed a CIM WITH SURVEYOR MARKER

SKETCH OF REFERENCE TIES

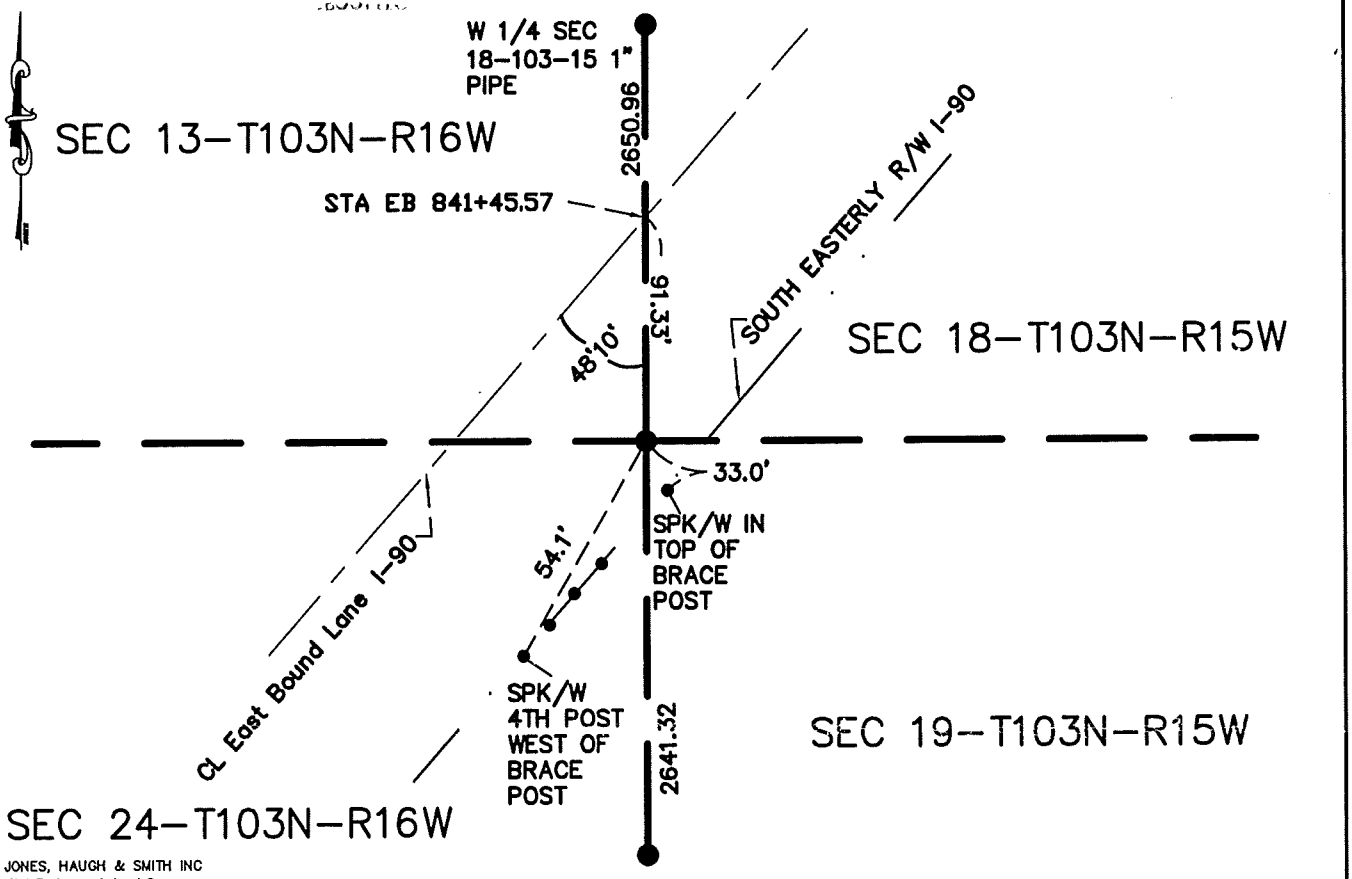

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-21-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 18-103-15

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1974 MNDOT I-90 R/w map shows 8" fieldstone and 2X2 hub ~~at corner~~ 91.33' south or station 841+45.57.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807. Searched the area and found no evidence of stone. Corner was reset from MNDOT stationing on I-90 R/W map at an angle of 48 degrees 10 minutes turned from south west to south from centerline of east bound lane I-90 91.33' south of station 841+45.57.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 24, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On OCTOBER 30,1957 (DATE) found a 8 INCH FIELD STONE
STONE REMOVED DURING ROAD CONSTRUCTION.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On OCTOBER 29,1979 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

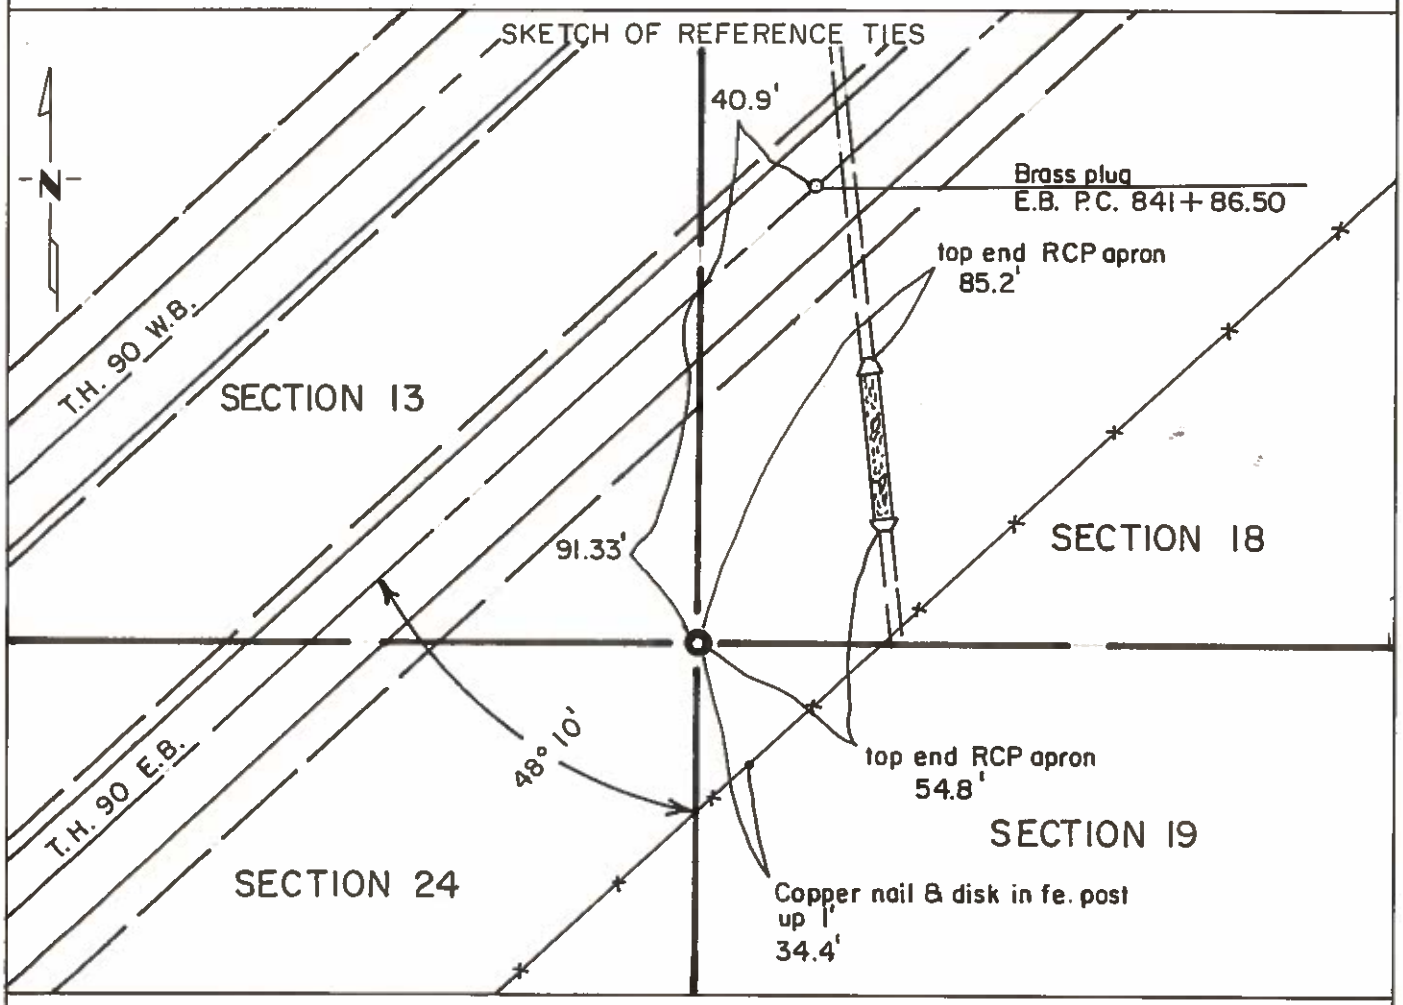

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 11-19-79 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the Co. Recorders office at 2 P.M. on the 21 day of Nov A.D., 19 79

County Recorder _____

By _____, Deputy

DOCUMENT NO. 342470

Book 49 of Misc. Page 433

M.H.D. FORM NO. 2105 BOOK 49 PAGE 433

Statement of Evidence:

NE CORNER SECTION 24, TOWNSHIP 103 N, RANGE 16 W, 5th P.M.

The history and origin of the 8 inch field stone has not been research to to validate or document it as the land corner.

This Certificate is filed only to record and preserve the location of a found monument.