p 10 "F"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 25, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-12-89 found A 6" BY 6" BY 9" STONE DOWN 2'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-12-89 placed A CTY. MON. ON A 24" BY 3/4" REBAR OVER STONE

SKETCH OF REFERENCE TIES

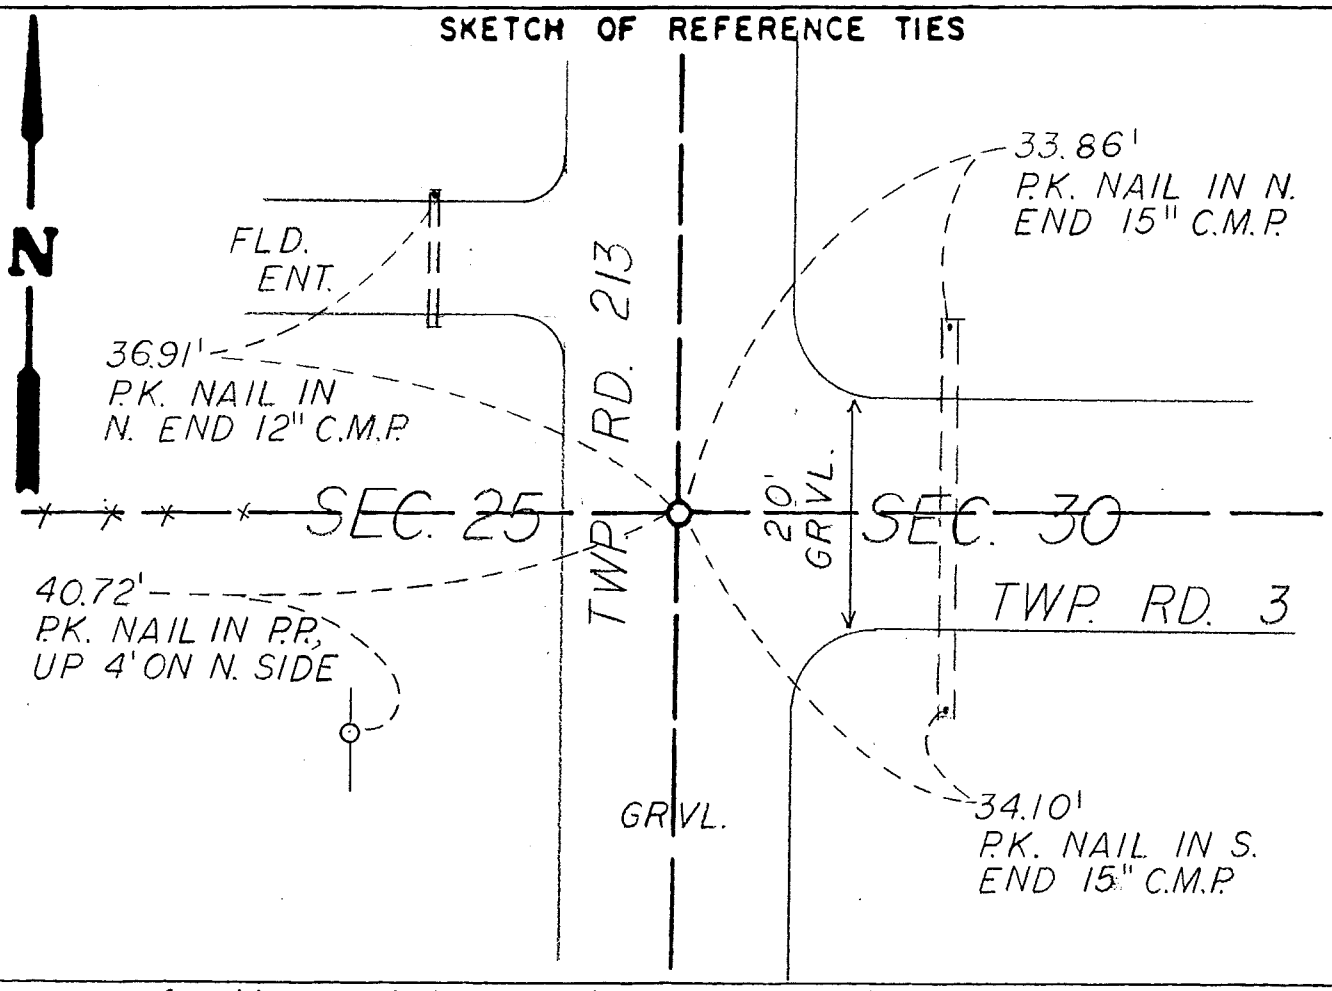

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 25 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Ball, Deputy Surveyor, set post for corner and built mound with trench per instructions. Put hand full of small stones in center & planted Osage Orange Seed in SE Corner during the original Public Land Survey.

April 12, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 4 feet North to 4 feet South of the road centerline East by 4 feet West to 6 feet East of the road centerline N-S by 5.5 feet deep and found a 6 inch by 6 inch by 9 inch high stone 4 feet East of the intersection of roads and 2 feet below the surface in an old road bed. A 1/2 inch by 24 inch pipe was found at the surface 1 foot South and 1 foot West of the intersection of centerlines and 2. 5 feet west of the stone. The stone was reset and a 1/2" iron pipe was placed along side of it.

An analysis of the record data gives no indication of the origin of the stone. It is similar in size to other corners found in this area and agrees with the lines of occupation. It is accepted as marking the location of the original Public Land Survey Corner.