Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 26, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/12/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

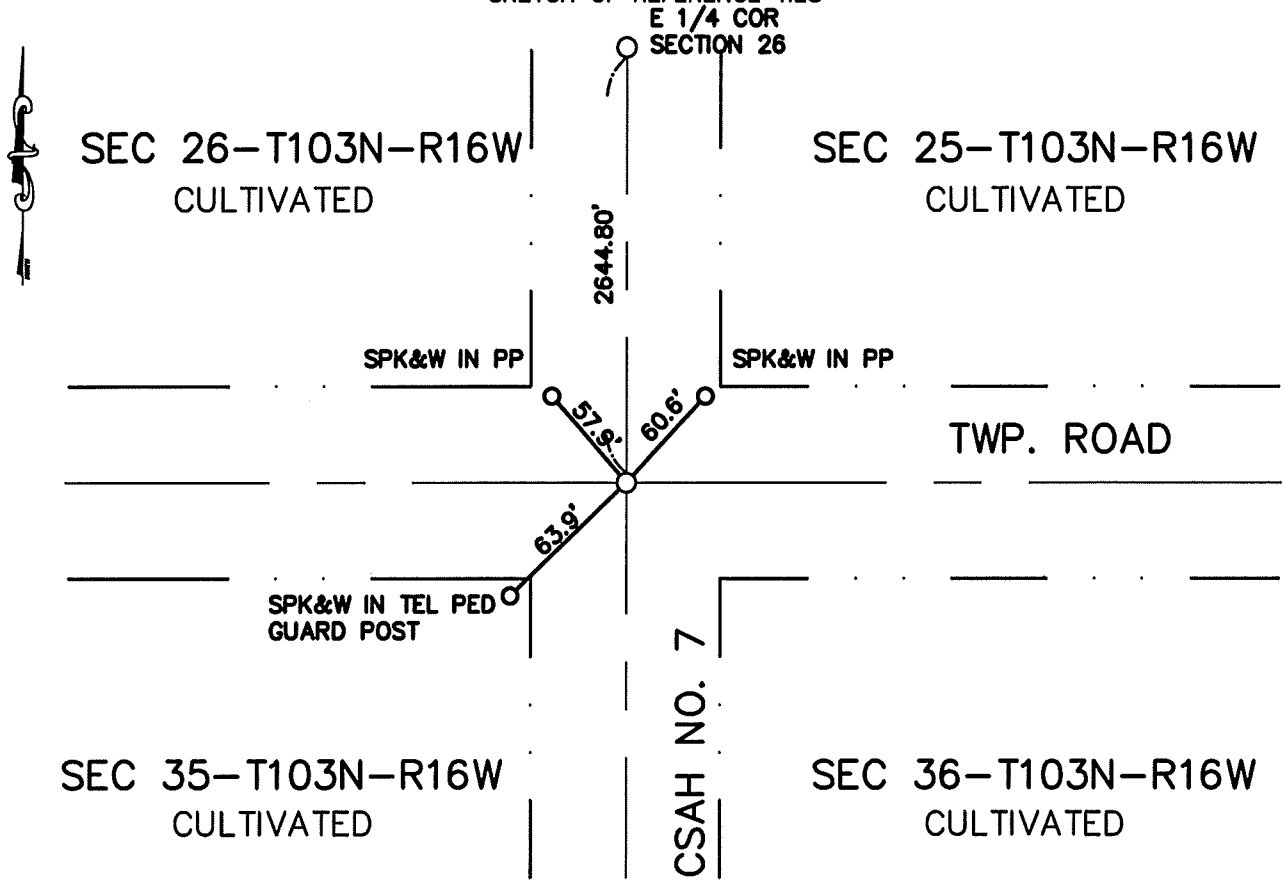

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-21-98
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 26-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

CSAH No. 7 road plans show a concrete monument inplace.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of centerlines of township road E-W and CSAH No. 7 N-S and at the location of patch in bituminous surface made by backhoe following excavation of section corner. Located a Harrison monument 1.20'+/- deep.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 35, Township 103N, Range 16 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-12-89 found A 8" BY 7" BY 8" STONE DOWN 5.3'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-12-89 placed A CTY. CAST IRON MON. OVER STONE.

SKETCH OF REFERENCE TIES

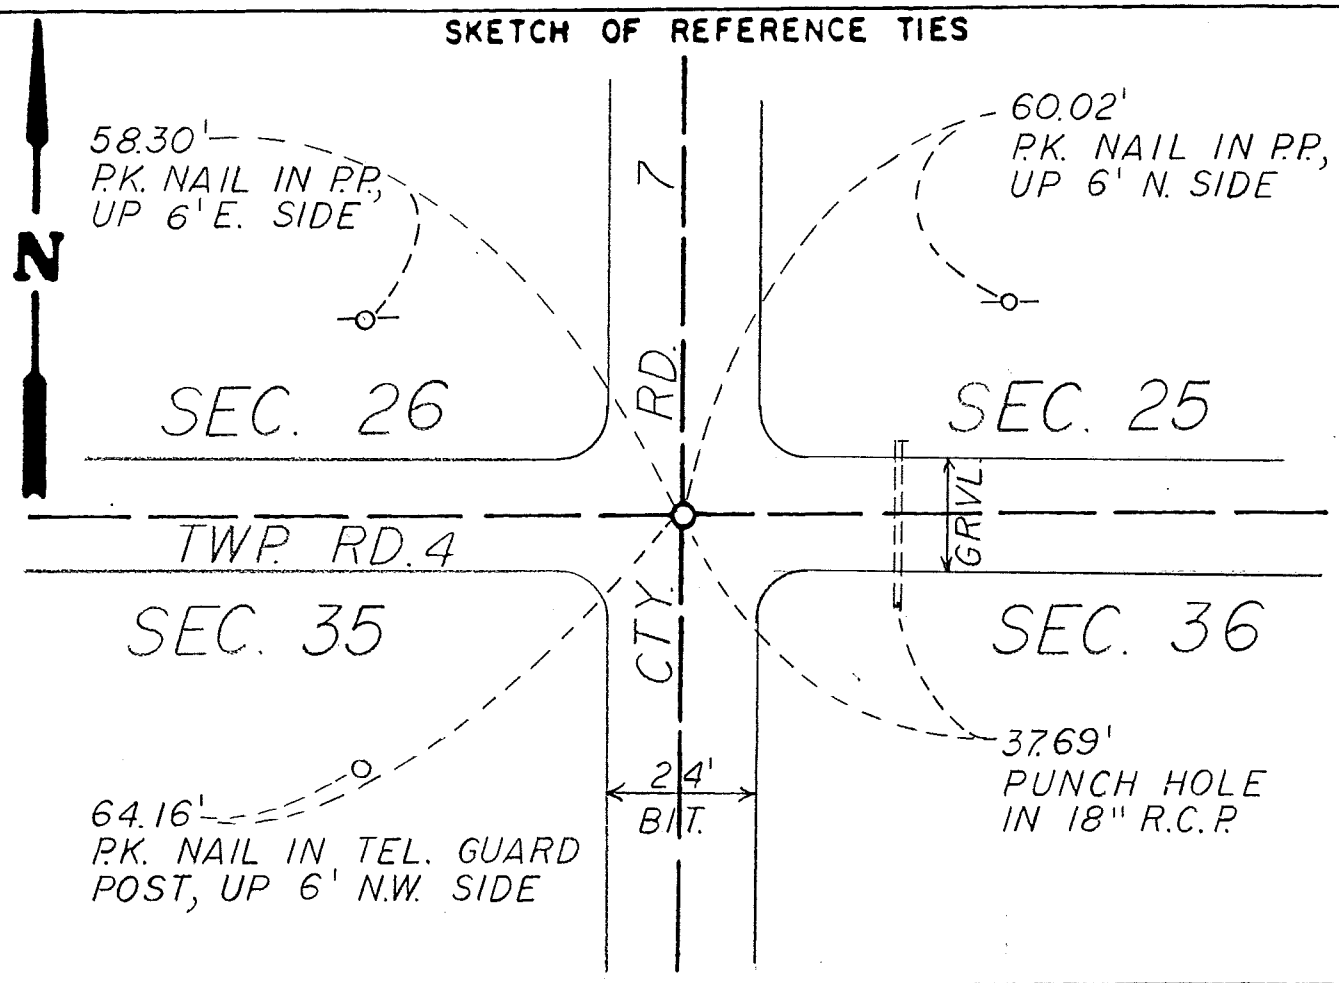

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 35 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Quigley, Deputy Surveyor, set post for corner and built mound with trench per instructions and deposited hand full of small stones. He planted Osage Orange Seeds in SE corner during the original Public Land Survey.

Mower County Engineer's plans show an inplace concrete monument at the corner with ties.

April 12, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 2 feet East to 2 feet West of centerline by 5 feet north to 5 feet South of road centerline East by 6.5 feet deep and found a 8" E-W by 7" N-S by 8" high stone 5.3 feet below the surface. Another stone and a 12 high rebar in concrete was found 2.3 feet down and directly over the stone. A 6" spike was found 1 inch below the surface 3 feet North of the Stone. The Stone was reset and a 12" rebar was set on the South side. The second stone was placed above it with a 1/2 pipe set along the West side.

An analysis of the record gives no indication of the origin of the stone. By evidence of the monuments placed above it, the stone has been recognized and used by the County (rebar in concrete) and other surveyors as the corner for many years and it agrees with the lines of occupation. The stone is accepted as marking the location of the original Public Land Survey Corner.