Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-2-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks 3.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-2-90 (DATE) placed a cast iron monument over 6" clay tile.

SKETCH OF REFERENCE TIES

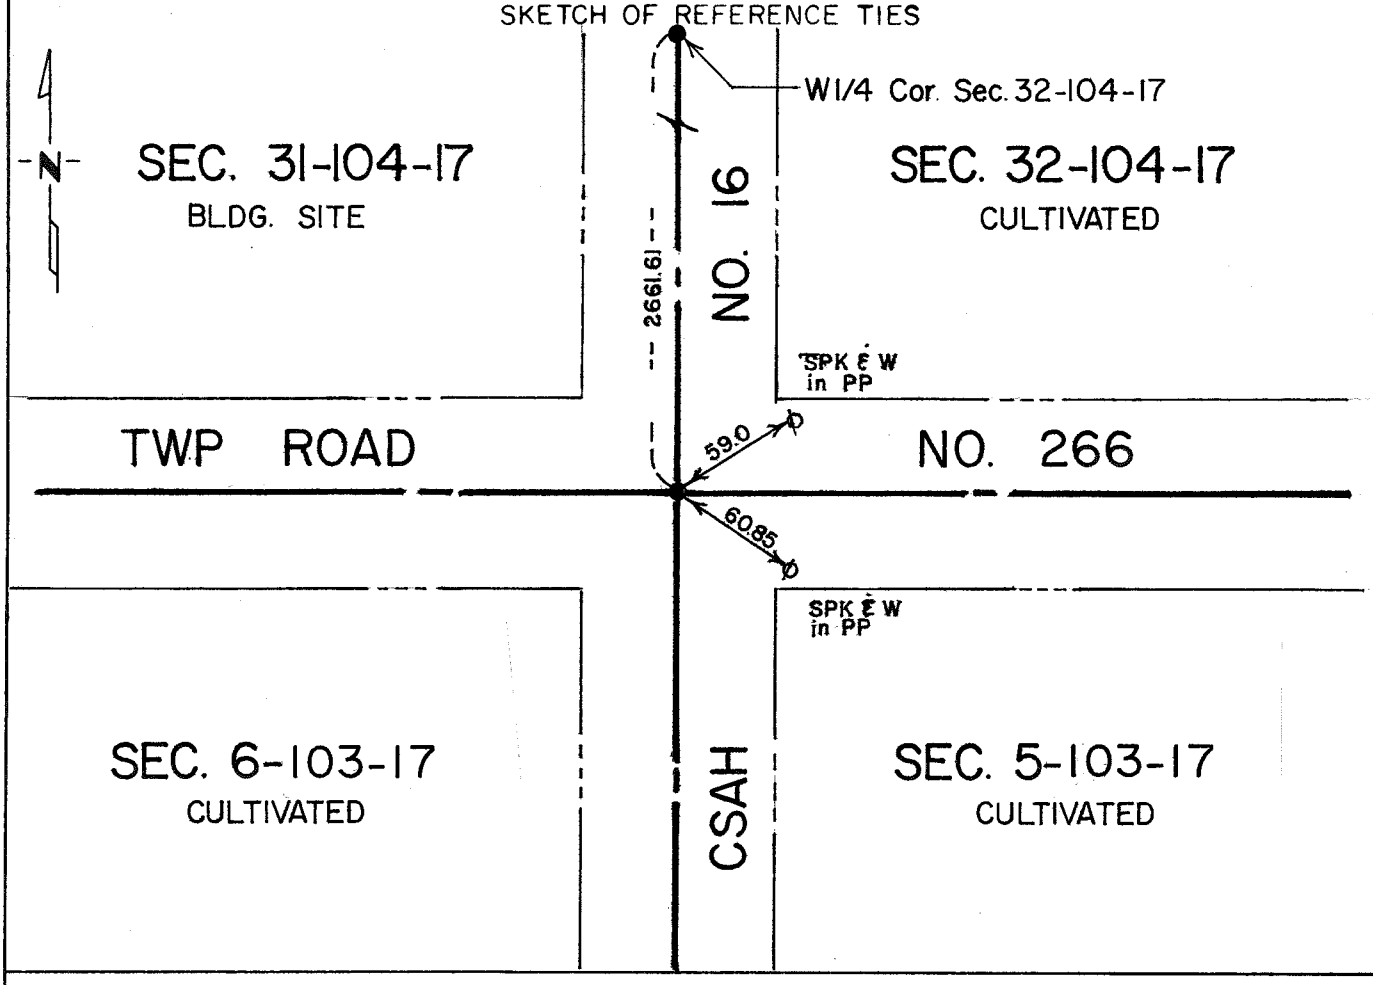

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered concrete tile with brick in center and took ties. Notes were recorded in Book 'A' in the County Engineer's Office.

1990 Jones, Haugh & Smith crew dug with a jackhammer on centerline centerline of north-south-east-west roads. Found a 1/2" diameter iron cast in 6" clay tiles surrounded by three bricks 3.0 feet below road surface. Placed a 5/8" diameter iron and cast iron monument over 6" clay tile found.

Corner found fits centerlines and is accepted as the best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. P.61

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-30-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-30-90 (DATE) placed a cast iron monument over clay tile.

SKETCH OF REFERENCE TIES

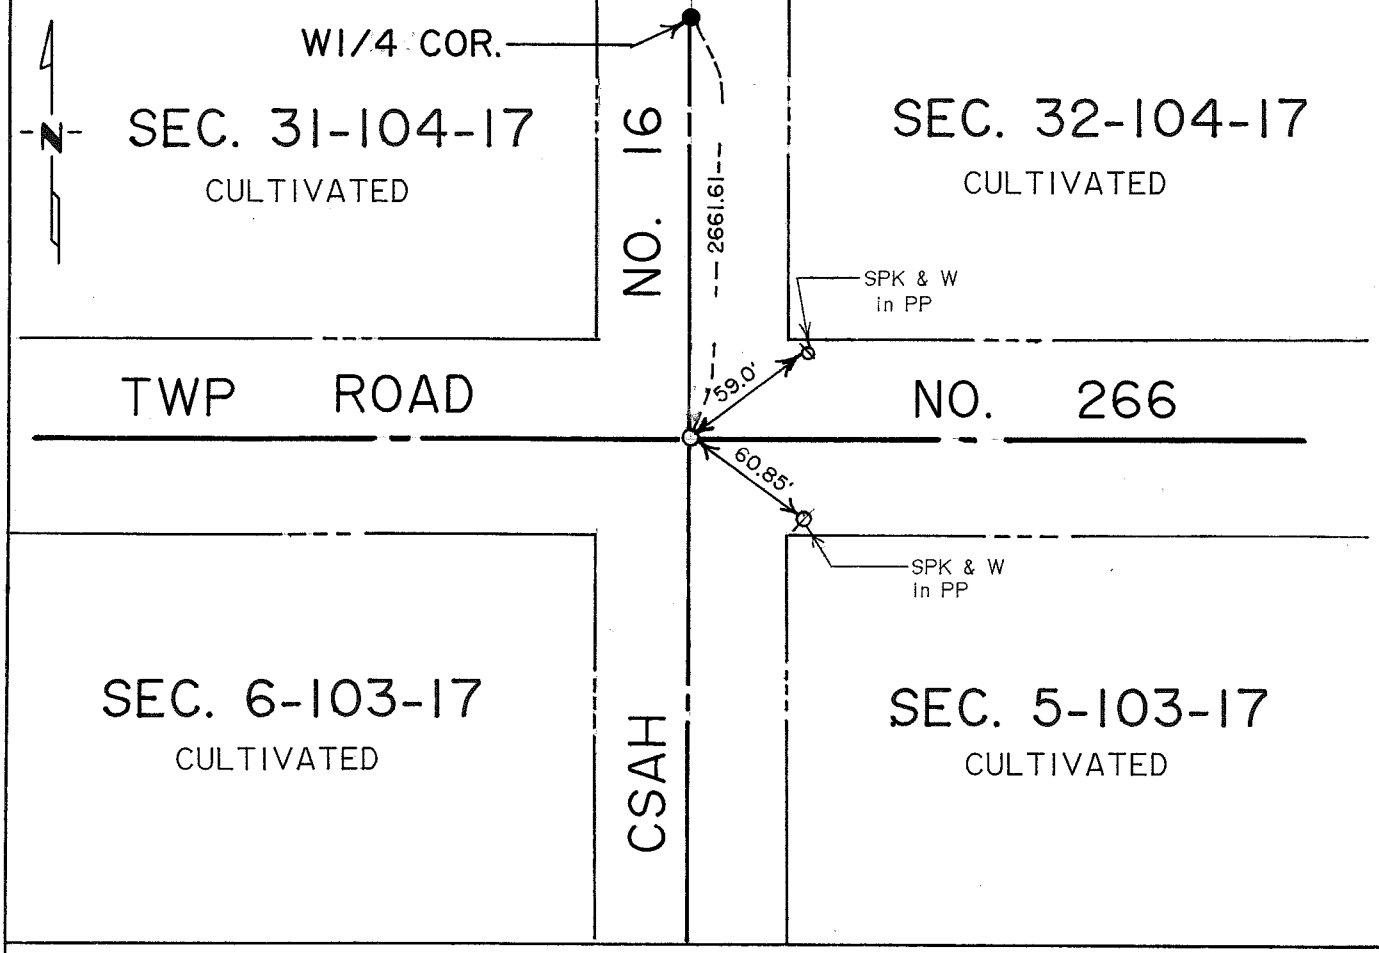

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-9-90 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineers Office
Mower County Recorders Office

Mower County Engineering Office - County Road Project shows an iron found.

1930 Records of A.C. White indicate clay tile with brick set at this location recorded in survey book in the Mower County Engineers Office.

1960 Mower County Grading Plan shows monument at this location.

1990 Jones, Haugh & Smith crew dug with a jackhammer and uncovered a 1/2" diameter iron in a 6" clay tile surround by three bricks 3.0 feet below road surface.

The monument found is in agreement with the records and is accepted as best evidence of Public Land Survey corner. Set cast iron monument over 6" clay tile.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.