Index No. "L" p 70

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 5/8" ϕ iron on east side of pointed field stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over 5/8" ϕ iron

SKETCH OF REFERENCE TIES

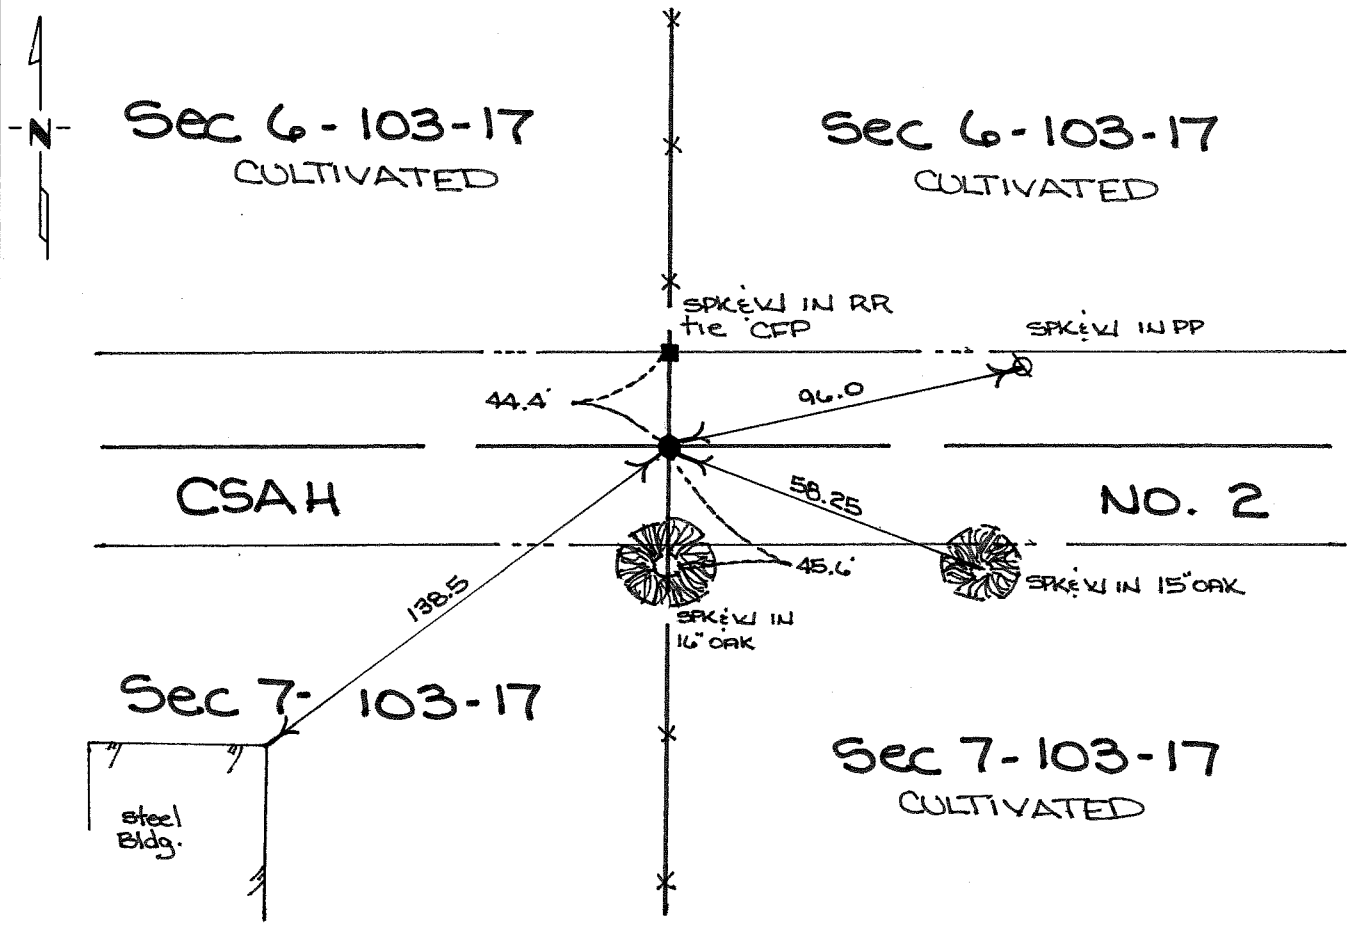


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N¼ corner Sec 7-103-17

This corner was originally established by John Ball, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show corner was marked with a wood post in mound with trench and drove charred stake.

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Chicago NorthWestern Transportation Company
Ray Tucker, Land Surveyor

The following information was obtained from Chicago NorthWestern Transportation Company:

1939 more or less, railroad stationing map showed centerline railroad 120 feet more or less, east of ¼ corner.

The following information was obtained from Mower County Highway Department:

1942 County Grading Plan shows no ¼ corner was found during grading project. Station given on fence at ¼ line and station on centerline of Chicago, Great Western Railroad agrees with information obtained from Chicago North-Western Transportation Company.

1987 Jones, Haugh & Smith Inc crew dug on centerline of east-west road in line with fence north-south at location of good signal with metal locater, 0.5 feet below road surface, uncovered a 5/8"ø iron. Continued digging and uncovered a 5/8"ø iron 2feet below road surface on the east side of a pointed field stone with remains of wood stake in virgin soil. Set cast iron monument over 5/8"ø iron.

The monument found fits occupation lines and road centerlines within the section and is in agreement with records from Chicago NorthWestern Transportation Company and Mower County Highway Department and is accepted as the original public land survey corner or a perpetuation thereof.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.