Index No. "K" p. 70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 6"dia. clay tile w/ 1/2"ϕ iron cast in concrete in the center of tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over 1/2"ϕ iron in tile

SKETCH OF REFERENCE TIES

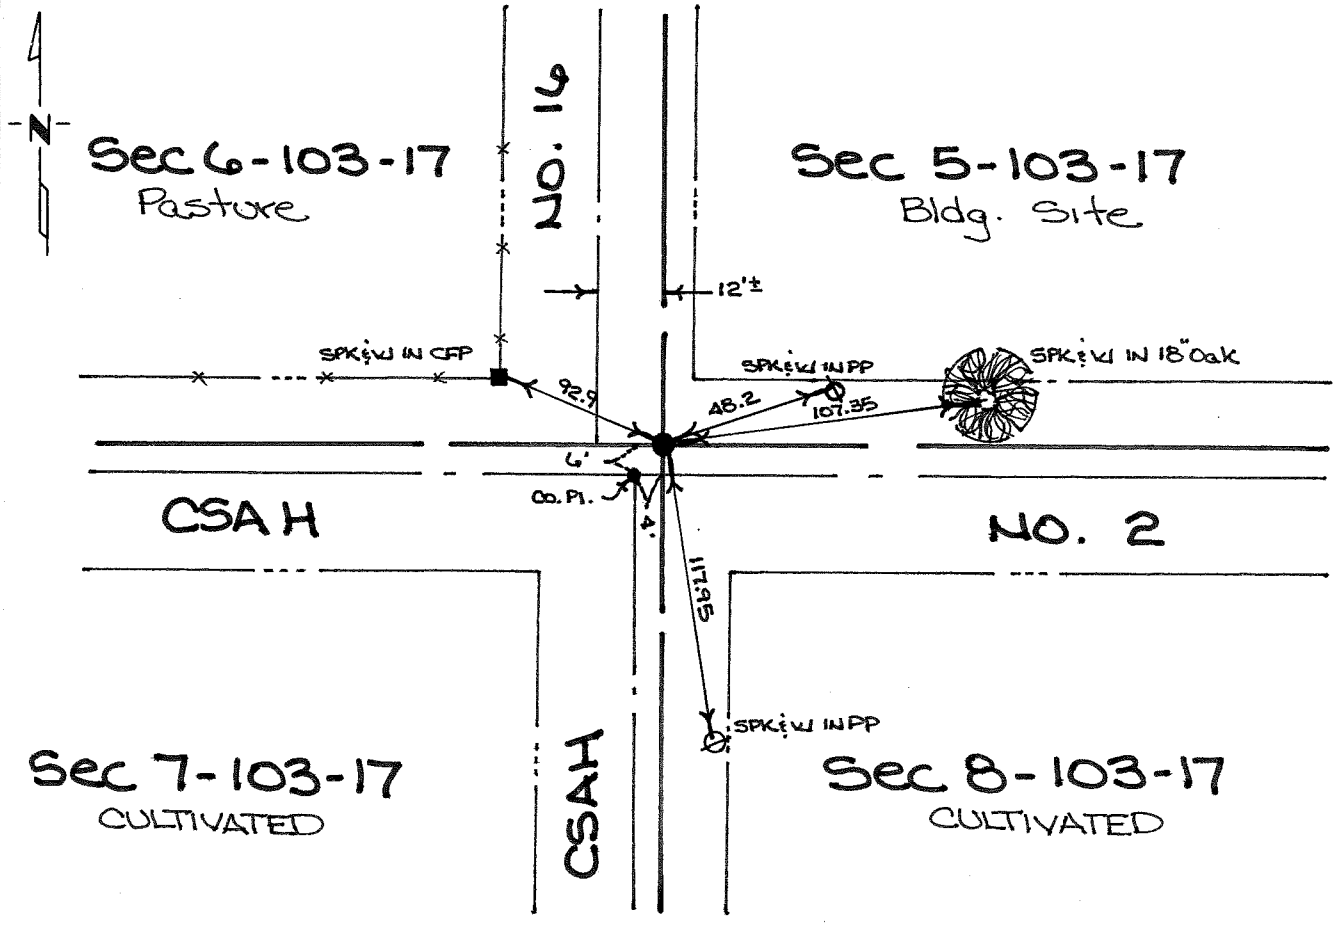

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-20-87
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 7-103-17

This corner was originally established by John Ball, Deputy Surveyor for the U.S. General Land Office. The government notes show the corner was marked with a wood post with mound and trench. Set charred stake in center.

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows a corner was uncovered during grading project four feet east and six feet north of County Pl. The corner was marked with a 3/4"ø iron.

1987 Jones, Haugh & Smith Inc crew dug a 2'x2' hole six feet north and four feet east of County Pl and at a depth of 1.5 feet. Below road surface in old roadbed uncovered a 6" diameter clay tile with 1/2"ø iron cast in concrete and set a cast iron monument over tile.

The monument found agrees with 1942 record and fits occupation and fence lines within the section and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.