Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-29-91 (DATE) found a 3/4"ø×16" PIPE OVER A 1" SQUARE SHAFT IN OLD ROAD BED OVER A 10"×10" SQUARE POINTED STONE WITH OLD LATH ON WEST SIDE IN VIRGIN SOIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-29-91 (DATE) placed a CAST IRON MONUMENT OVER STONE

SKETCH OF REFERENCE TIES

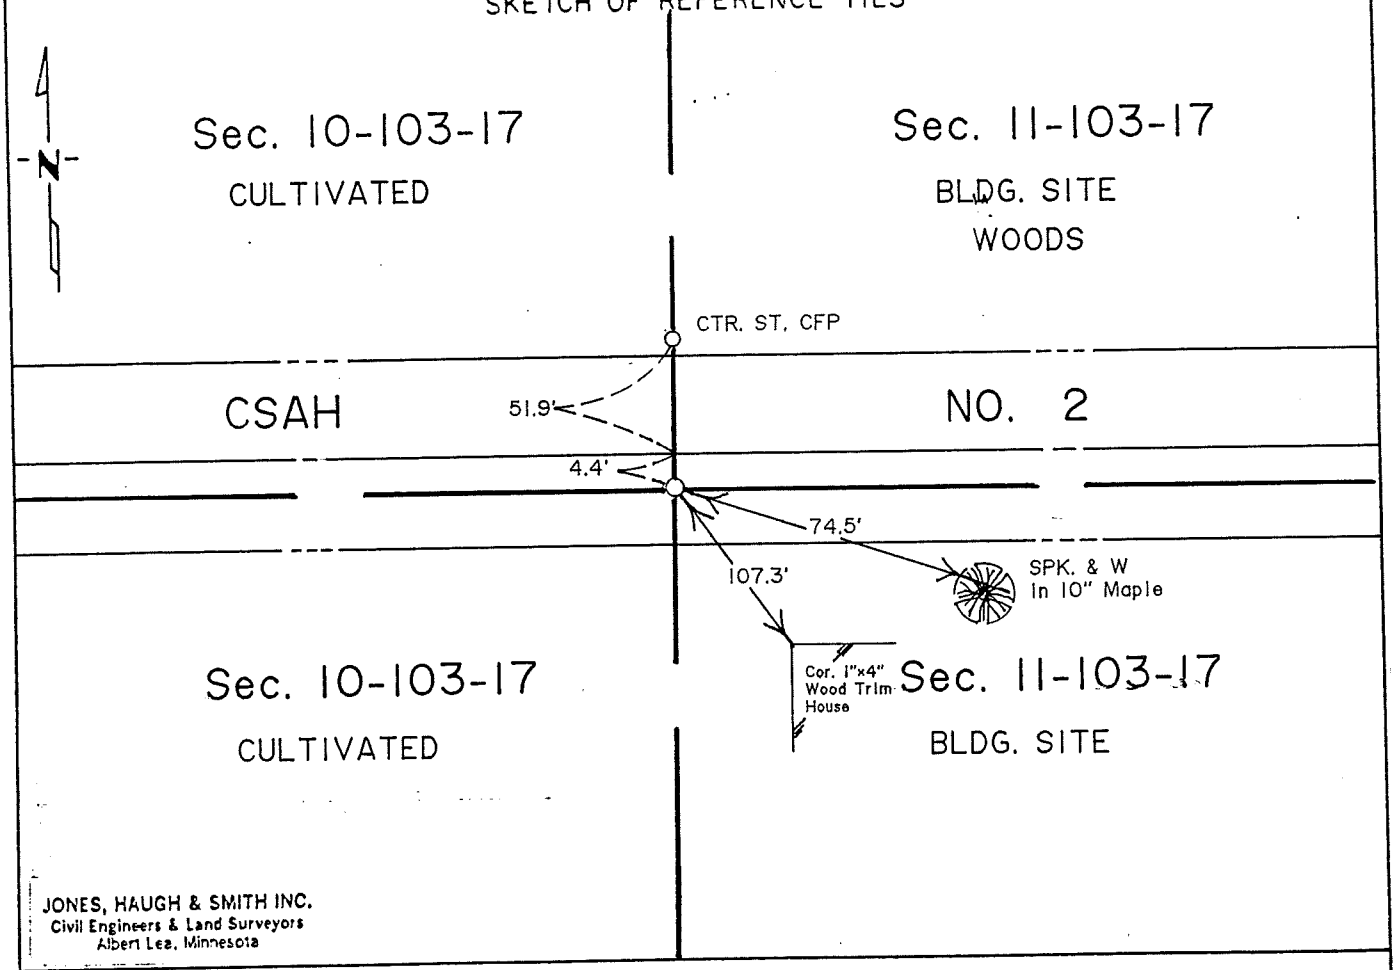

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-21-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 11-103-17

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

11" Burr Oak	N 21° E	85 links (56.10 ft)
12" Burr Oak	N 63° W	160 links (105.60 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1942 Book 'A' of the Mower County Engineer's Office show a tile monument inplace. The following ties were taken:
61.25' ENE to north end C.M.
61.8' ESE to south end C.M.
50.0' NW to T.P.

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe at a point 3 feet south of centerline in line with fence north. Uncovered a 3/4" diameter x 16" pipe 1.0 feet deep over a 1" square shaft in an old roadbed. Continued digging and found a 10"x10" square pointed stone with an old lath on west side. Placed a 5/8" diameter x 16" iron capped 13807 on west side of stone and set a cast iron monument over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.