Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 5/8"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

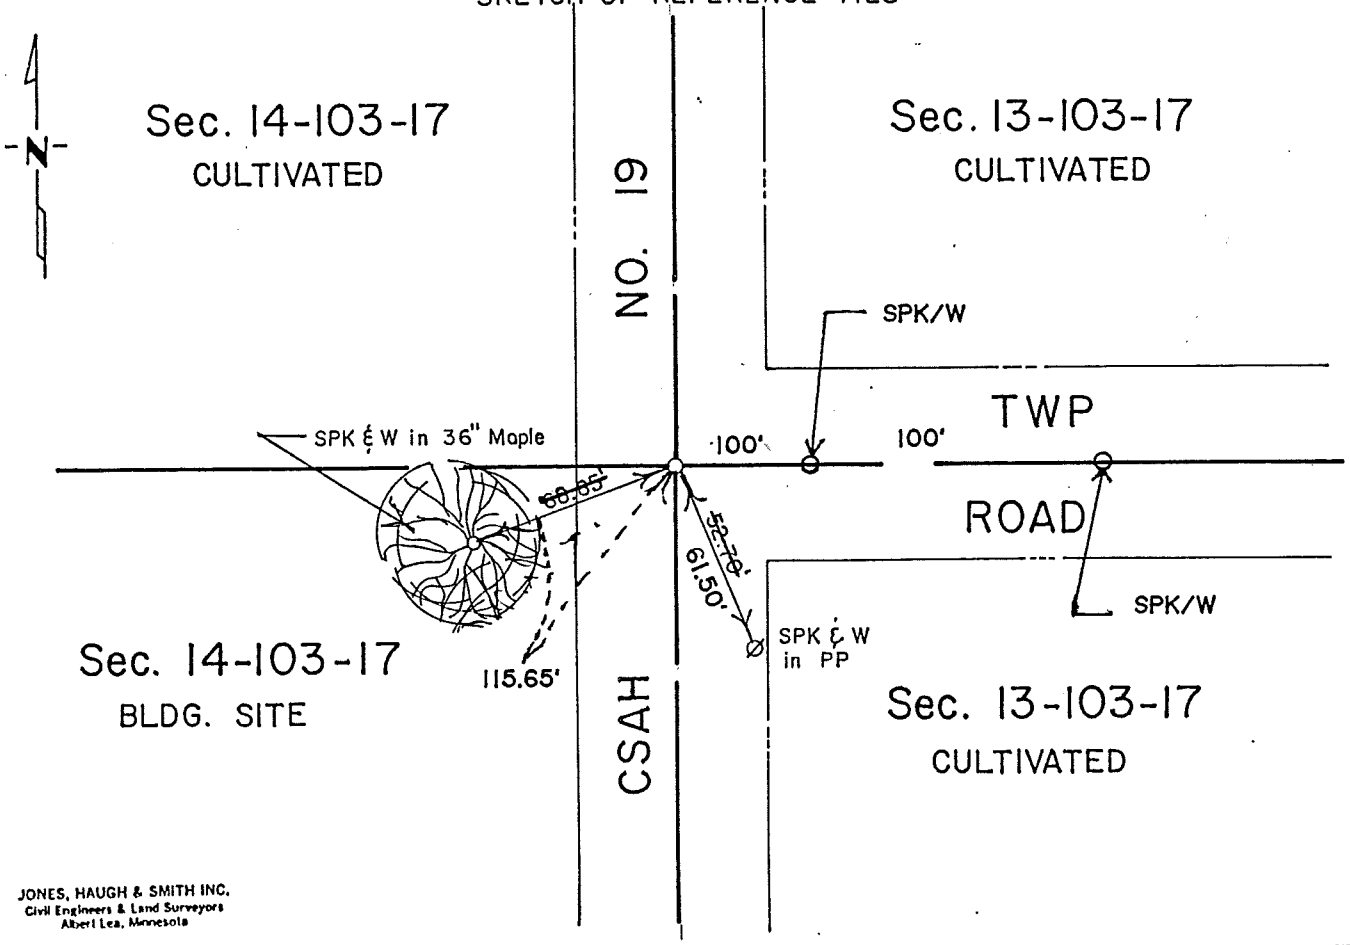

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" 0.2' below the road surface.

1980 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the SW 1/4 Section 14-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter 0.3 feet below the road surface. The monument was accepted and ties were taken.

1991 Jones, Haugh & Smith crew dug with the County backhoe and uncovered a 5/8" diameter x 24" iron 0.5 feet deep. Continued digging an 8' x 8' x 6' deep hole and found no further evidence. Assumed any perpetuation of original public land survey corner would have been destroyed by Tucker excavation in 1986. Accepted the 5/8" diameter iron as the best evidence and set cast iron monument.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set (road surface)

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 5/8"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

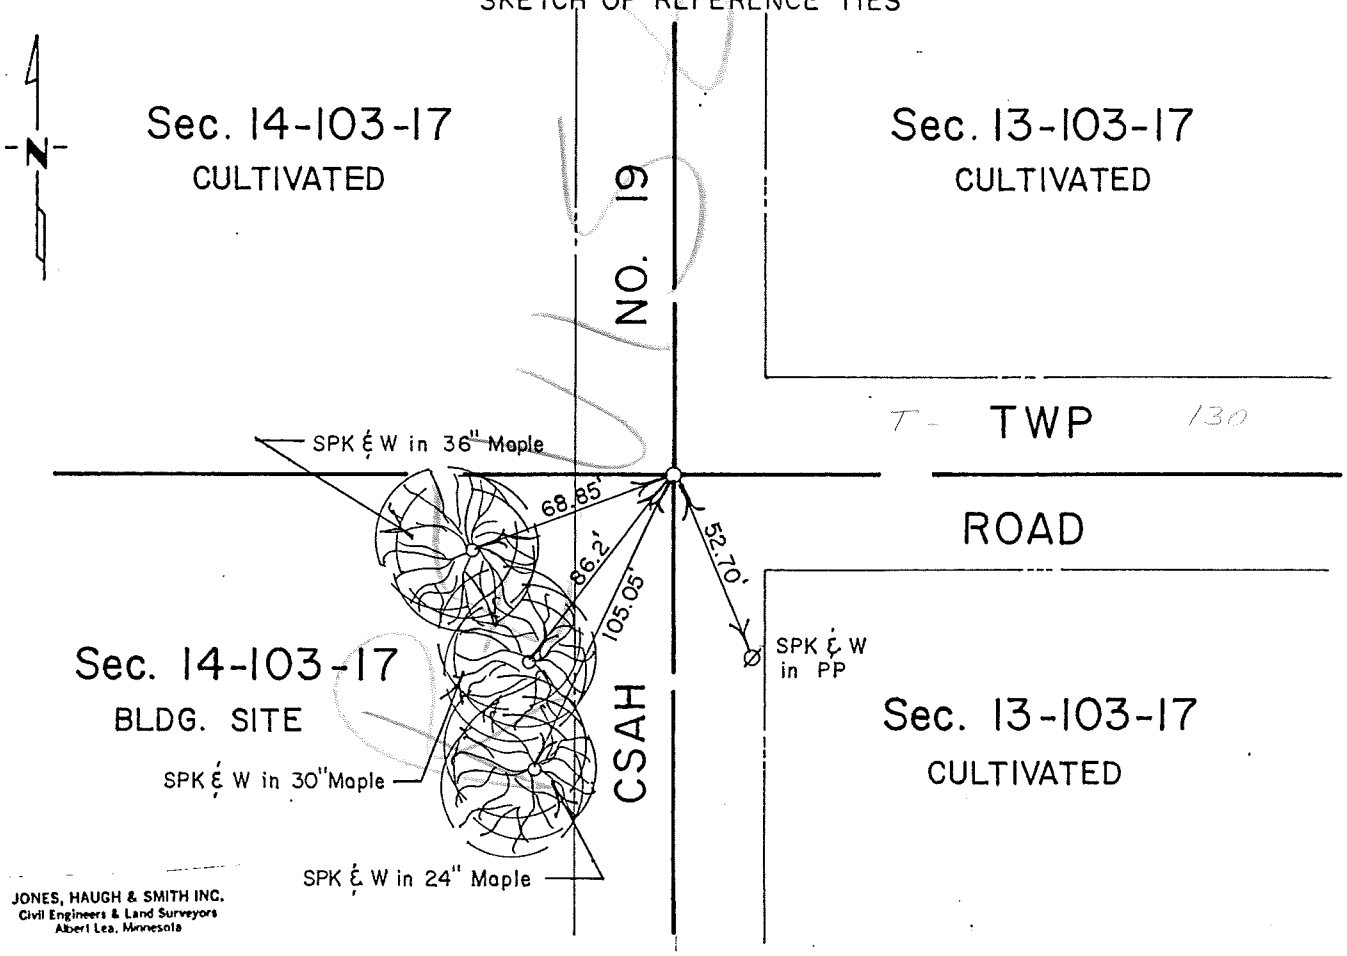

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13607

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" 0.2' below the road surface.

1980 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the SW 1/4 Section 14-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter 0.3 feet below the road surface. The monument was accepted and ties were taken.

1991 Jones, Haugh & Smith crew dug with the County backhoe and uncovered a 5/8" diameter x 24" iron 0.5 feet deep. Continued digging an 8' x 8' x 6' deep hole and found no further evidence. Assumed any perpetuation of original public land survey corner would have been destroyed by Tucker excavation in 1986. Accepted the 5/8" diameter iron as the best evidence and set cast iron monument.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.