Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a bridge spike over a 5/8"Ø x 24" re-bar 1.0' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

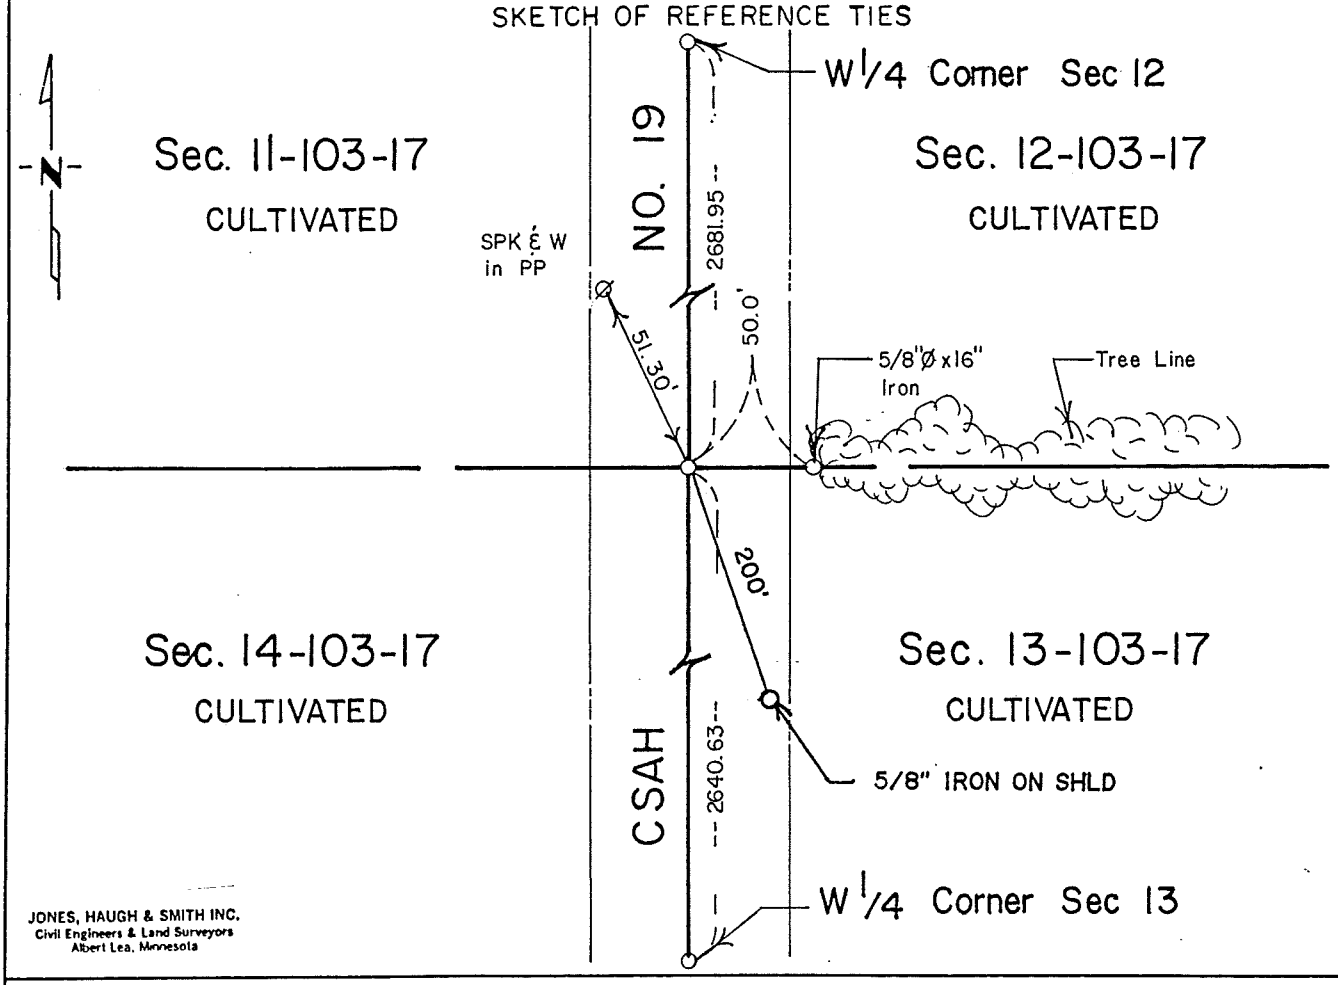

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter x 24" long iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the NW 1/4 of Section 13-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter x 24" iron and took ties. Information was recorded in Book "A" in the office of the County Engineer. No certificate of location was filed.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, RLS 13807, dug with the Mower County backhoe and uncovered a 5/8" diameter x 24" long iron 1.0 feet below the surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Set a cast iron monument at the location of 5/8" diameter iron.

1997 Re-set (road surface)

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a bridge spike over a 5/8"Ø x 24" re-bar 1.0' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

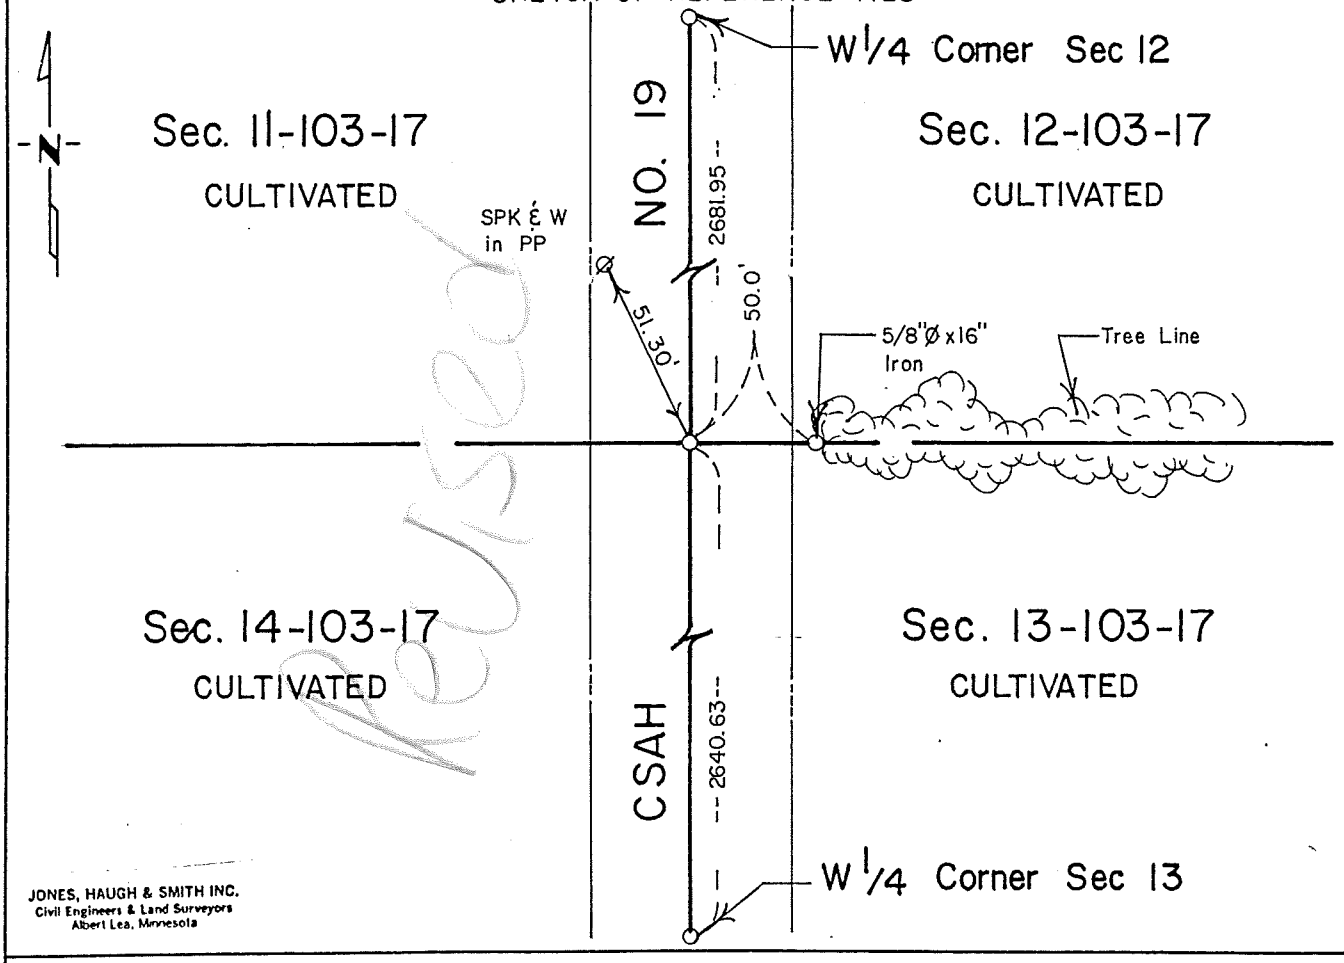

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter x 24" long iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the NW 1/4 of Section 13-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter x 24" iron and took ties. Information was recorded in Book "A" in the office of the County Engineer. No certificate of location was filed.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, RLS 13807, dug with the Mower County backhoe and uncovered a 5/8" diameter x 24" long iron 1.0 feet below the surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Set a cast iron monument at the location of 5/8" diameter iron.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.