Index No. "I" P 20

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 4" dia. heavy wall pipe.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over pipe.

SKETCH OF REFERENCE TIES

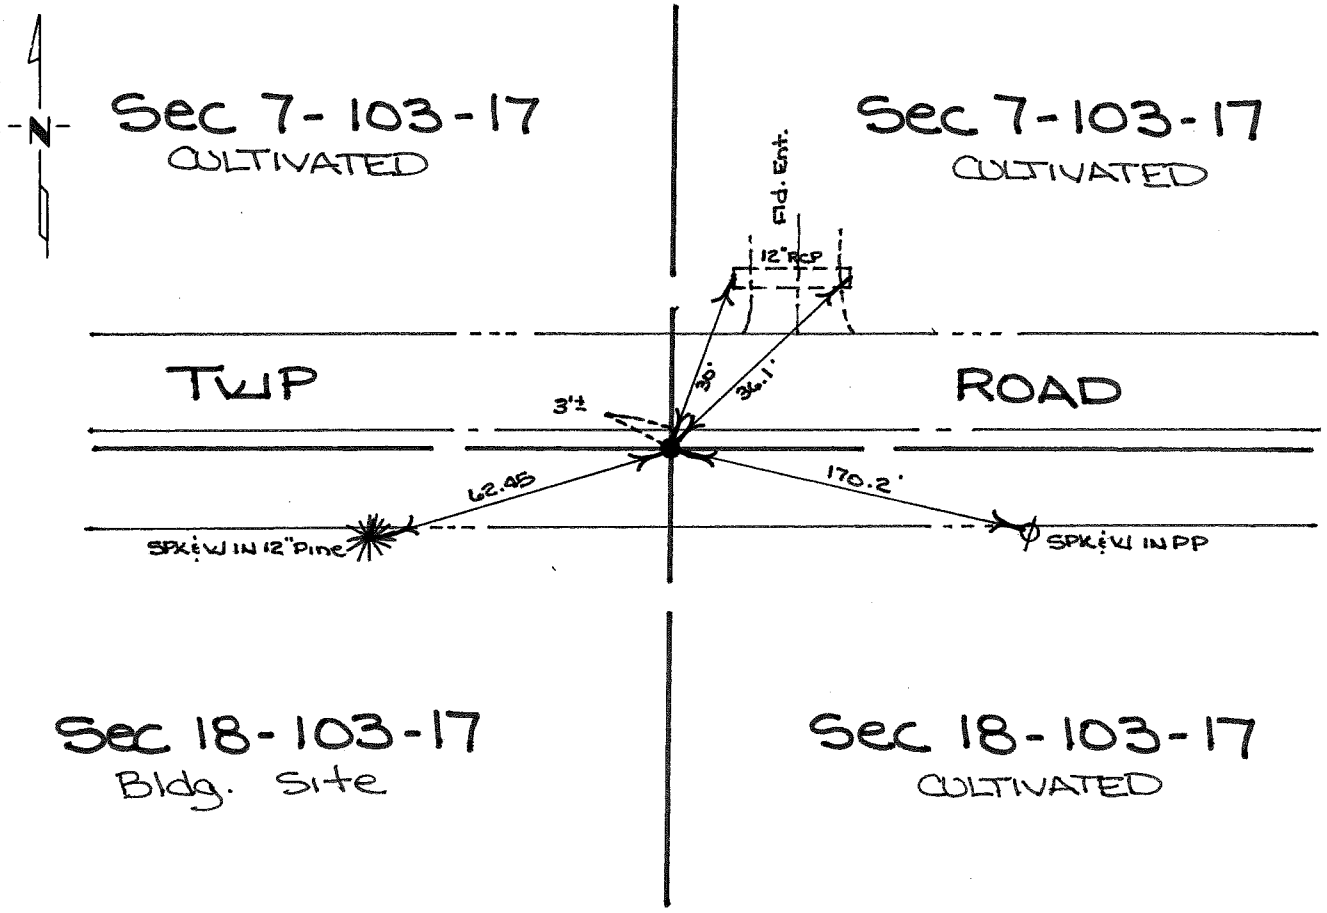

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$S\frac{1}{4}$ corner Sec 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show the corner was marked with a wood post and ties were taken to bearing trees marked:

16" Burr Oak S 38° E 105 Links
10" Burr Oak N 60° W 144 Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

1987 Jones, Haugh & Smith Inc crew dug at location of good dip with metal locater in line with fence north-south. At a depth of 2 feet below road surface, uncovered a 4" diameter heavy wall pipe in virgin soil. Set cast iron monument over pipe.

The monument found fits occupation lines and fence lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.