"C" p 70

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 6" dia. clay tile w/ ½" sq. iron cast in concrete in center of tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over ½" sq. iron

SKETCH OF REFERENCE TIES

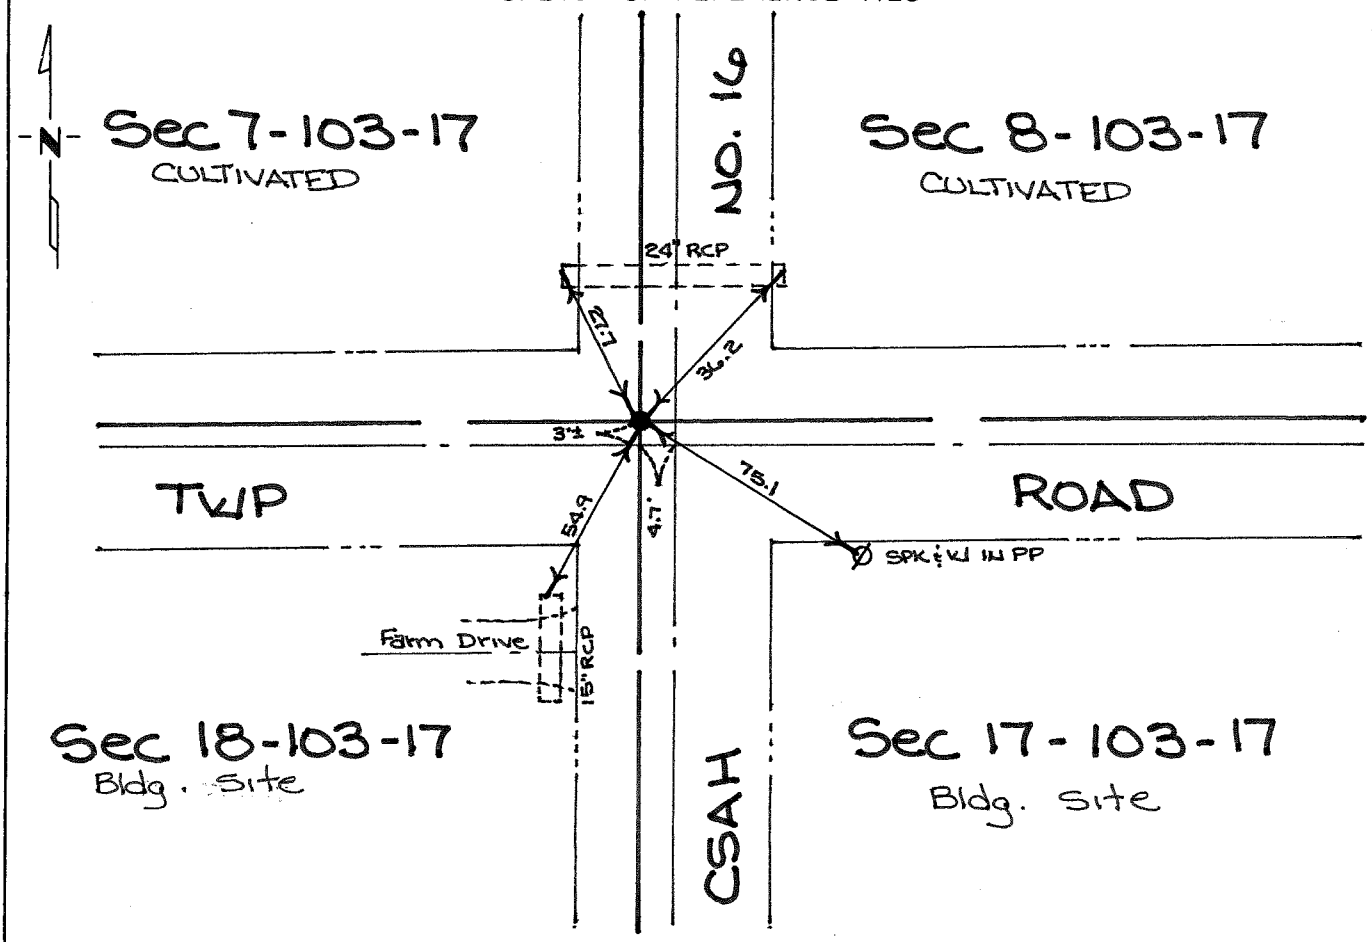

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 3-20-87 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show the corner was marked with a wood post and ties were taken to bearing trees marked:

8" Burr Oak	S 39° W	63	Links
9" Burr Oak	N 83° W	500	Links
8" Burr Oak	N 32° E	190	Links
14" Burr Oak	S 80° E	350	Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows corner west of PI, but gives no evidence of what was found.

1987 Jones, Haugh & Smith Inc crew dug at location of good signal with metal locator west of centerline PI at a depth of 0.5 feet uncovered a large spike. Continued digging and at a depth of 2 feet below road surface, uncovered a 6" diameter clay tile with a 1/2" square iron cast in concrete. Set cast iron monument over tile.

The location of the monument found agrees with 1942 record and fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis,contact Jones, Haugh & Smith Inc.