Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 16, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-30-90 (DATE) found a 10"Ø CFP WITH REMAINS OF DOWNED FENCE RUNNING N-S-E-W IN A YOUNG WOODS.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-30-90 (DATE) placed a 5/8"Ø IRON CAPPED (13807) ON WEST SIDE OF CFP.

SKETCH OF REFERENCE TIES

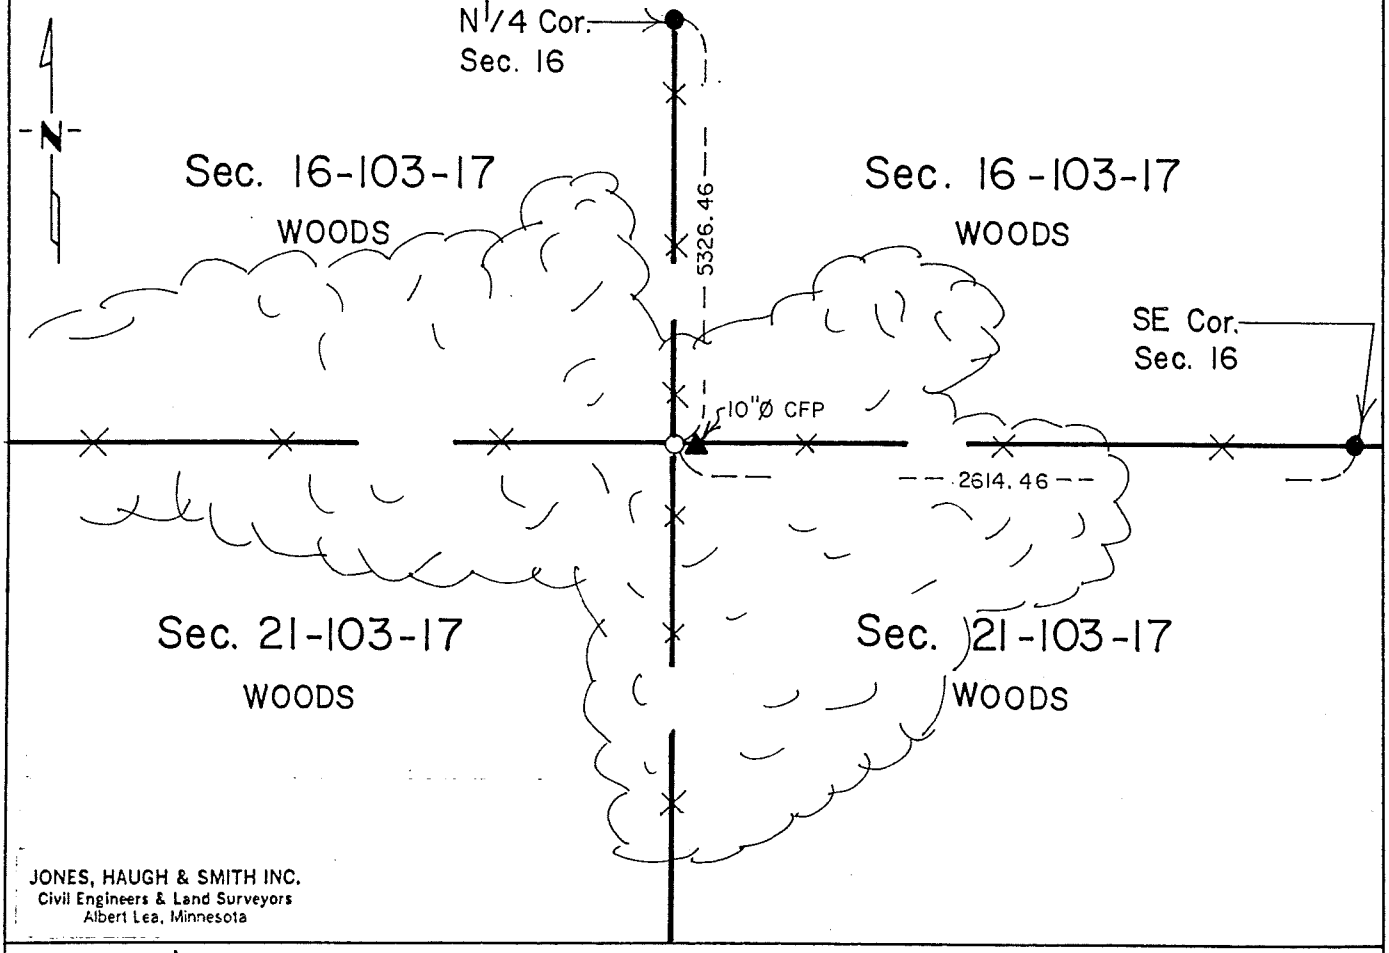

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-12-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and a trench and the following ties were taken:

8" Burr Oak	N 68° W	1025 links	(676.50 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew found a 10" diameter CFP with remains of downed fences running north-south-east-west in a woods. Placed a capped 5/8" diameter iron on west side of CFP.

Corner found fits occupation lines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.