Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 31, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/29/1982 (DATE) found a REMAINS OF WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/15/1995 (DATE) placed a CAST IRON MONUMENT OVER CAPPED IRON

SKETCH OF REFERENCE TIES

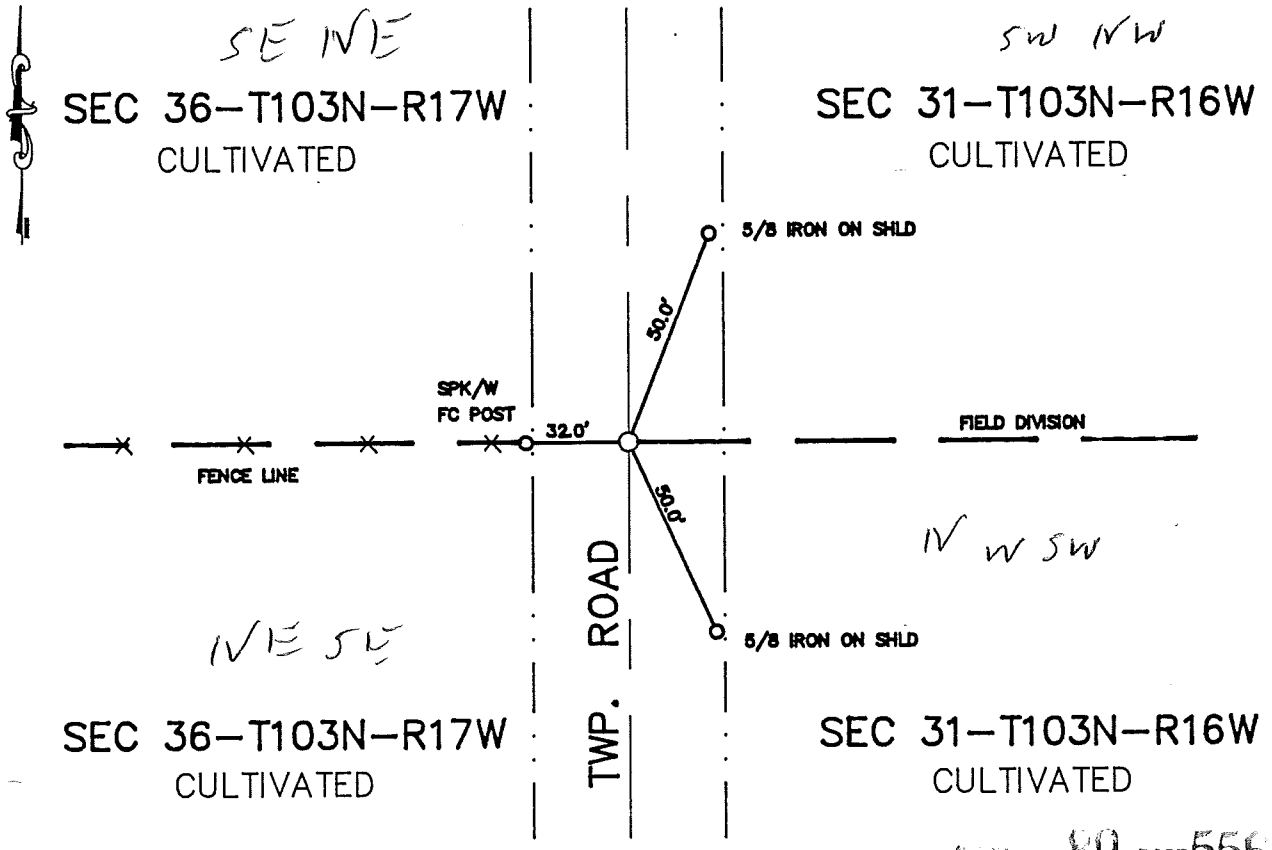


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 556

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p.M. on the 2 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441690

M.H.D. FORM NO. 2105

Book 89 Misc Page 556

W 1/4 Cor SEC 31-103-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and a handful of stones were set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1982 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of township road and in line with field division E and fence line W. Found remains of a wood post and accepted it as best evidence of the original PLS corner. Set a 5/8"x24" iron pin capped RLS 13807.

1995 Jones, Haugh, and Smith crew dug by hand at the CL of township road and found a 5/8"x16" iron capped RLS 13807 in agreement with 1982 record. Placed a cast iron monument over pin found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.