Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 25, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a 1 1/2" SHAFT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

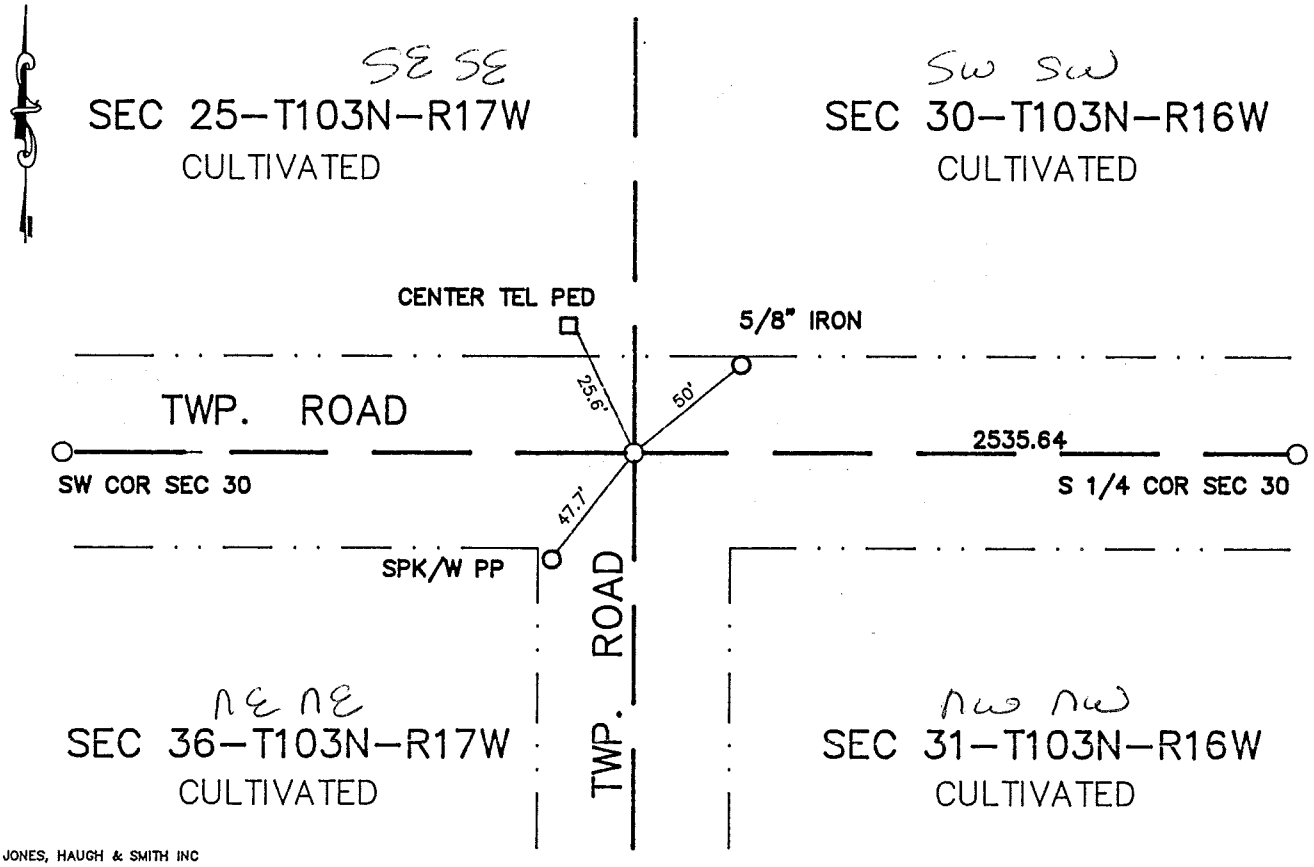

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 440236

M.H.D. FORM NO. 2105 BOOK 89 PAGE 206

Book 89 Misc Page 206

SE Cor SEC 25-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of road E-W and CL road South. Found a 1.5"x2' long shaft. Continued digging and found no other evidence of corner. Excepted shaft as perpetuation of the original PLS corner. The corner location fits CL of road E-W and is 3 feet East of the road South. Placed an iron pin on N side of shaft capped RLS 13807. Placed a cast iron monument over shaft found on road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 30, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/30/1995 (DATE) found a 1 1/2" SHAFT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/30/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

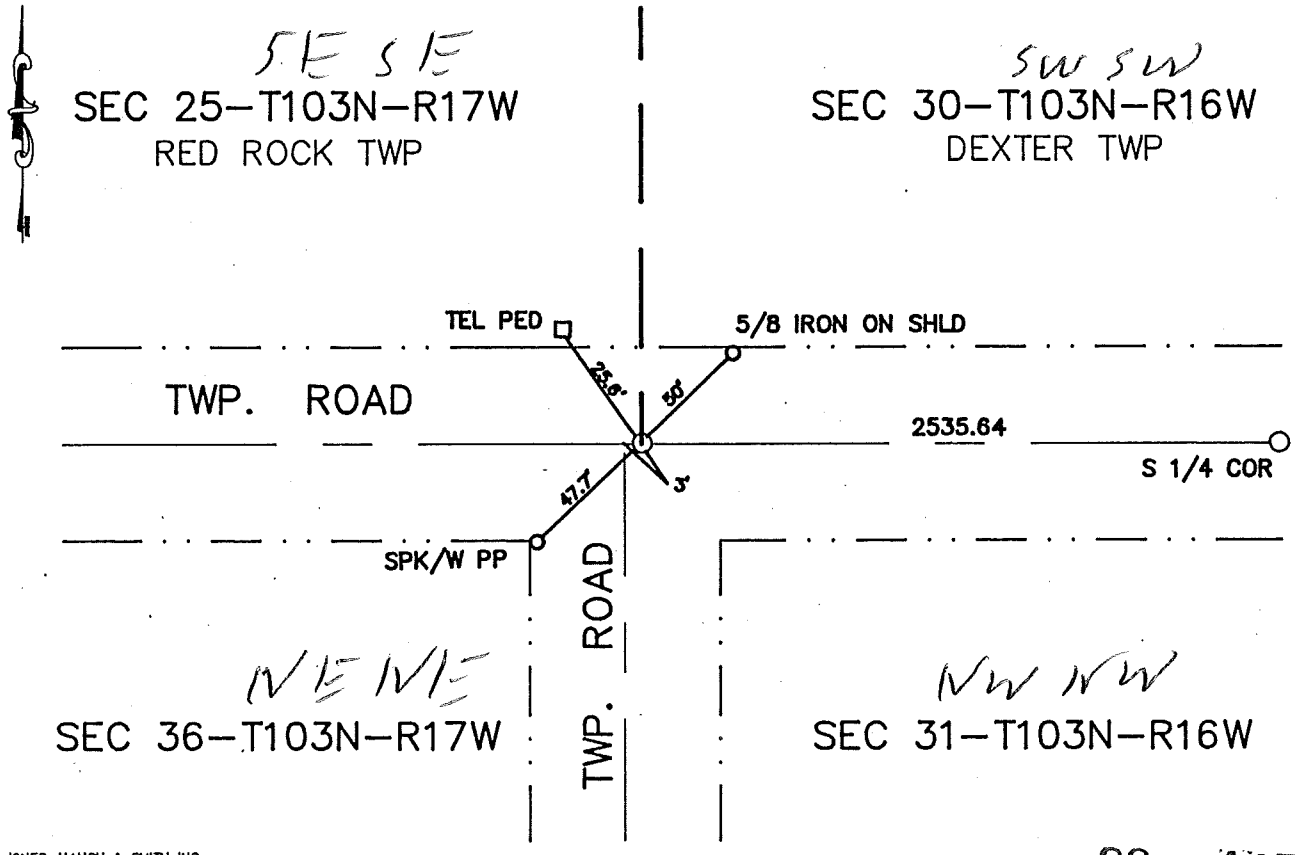

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 145

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 438799

M.H.D. FORM NO. 2105

Book 88 Misc Page 145

SW Cor SEC 30-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads E-W, and S. Uncovered a 1.5" shaft 2' long. Continued digging but found no further evidence of the corner. The shaft was left as found and a 5/8 iron capped RLS 13807 was placed on the north side. The corner is on CL of the E-W road and approximately 3' E of the road to the south. A CIM was placed over the shaft, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.