Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 4, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a IRON AND CAP # 22044

SKETCH OF REFERENCE TIES

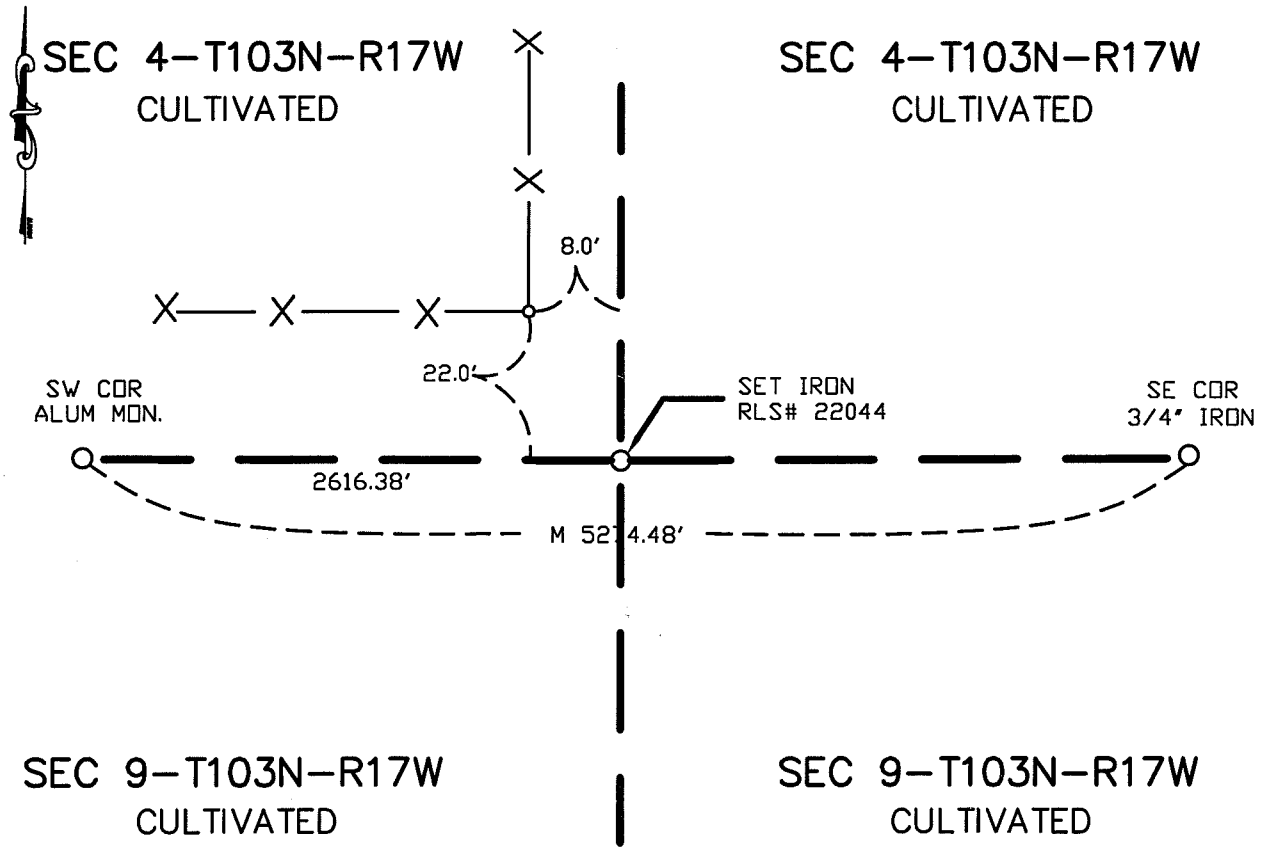

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-1-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 4-103-17

This corner was originally established by Deputy William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 David G. Rapp RLS 22044, set this corner on a straight line between the SW Sec Cor and the SE Sec Cor at a distance of 2616.38' East of the SW Cor of Sec 4.

The monument fits occupation within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

A TIE BOOK P108
Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 4, Township 103 N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-11-72 (DATE) found a 3/4 INCH PIPE, DOWN 2.0 FEET

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT OVER 3/4 INCH PIPE, 1/2 INCH BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

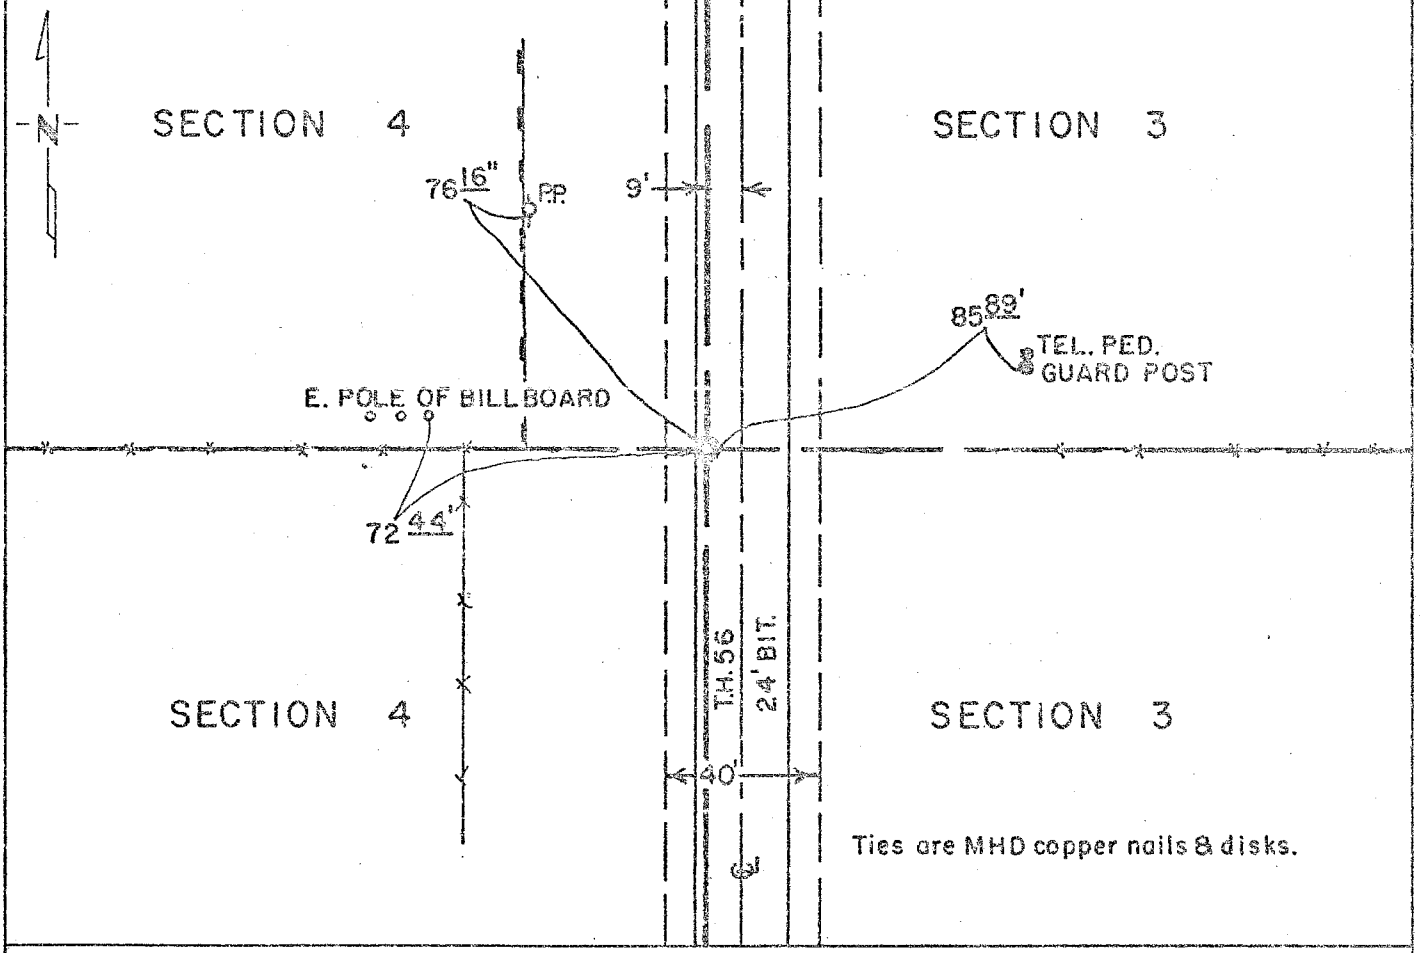

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Cochrane 9/8/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER, SECTION 4, TOWNSHIP 103N, RANGE 17 WEST

October 1854	Wm. I. Anderson, Deputy Surveyor, set post for corner during the Original Public Land Survey.
July 1929	C. Aasland, M.H.D. Engineer, found an iron pin at the corner, 9.1 feet west of P.O.T. 1075+40.5. The iron pin was replaced with a 3/4 inch gas pipe on June 20, 1930.
1941	O. J. Gerner, M.H.D. Engineer, found a 3/4 inch gas pipe 10 inches below surface, 9.1 feet west P.O.T. 1075+40.5.
August 1972	A. L. Sotebeer, M.H.D. Engineer, found a 3/4 inch pipe 2 feet below road surface, 8.9 feet west of P.O.T. 1075+41.5.
1973	M.H.D. resurfaced T.H. 56 with Bituminous.
April 1975	M.H.D. placed a Cast Iron Monument above the 3/4 inch pipe, 1/2 inch below the new road surface.

An analysis of the record data indicates the 3/4 inch iron pipe was set in 1930 to replace the iron pin found in 1929. The 3/4 inch iron pipe is accepted as a perpetuation of the Public Land Survey corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

"B" TIE BOOK P108
Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☑ On 8-11-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT, DOWN 2.0 FEET.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ABOVE CONCRETE MONUMENT, 1/2 INCH DOWN.

SKETCH OF REFERENCE TIES

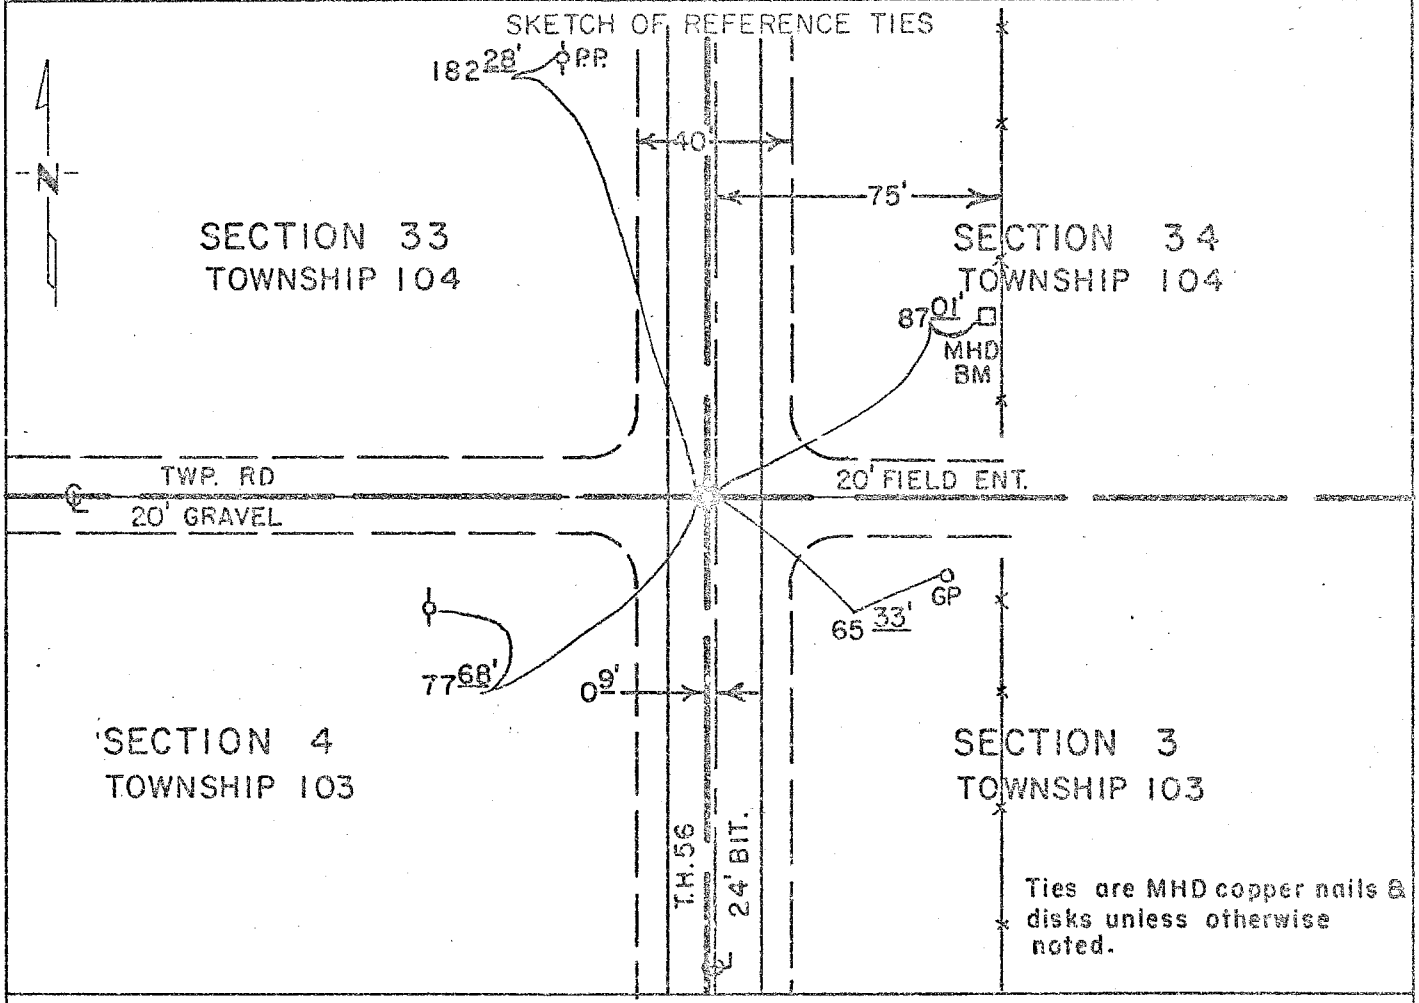

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R. Bickling 9/8/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 4, TOWNSHIP 103 N, RANGE 17W. 5th P.M.

July 1853 — John Ball, Deputy Surveyor, built mound with trench, drove charred stake in center for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, placed an iron pin by an oak stake with pottery around it, 4.8 feet west of P.O.T. 1101+70.0, replaced the corner June 20, 1930 with a 6 inch by 6 inch by 18 inch concrete marker.

1941 — O. J. Gerner, M.H.D. Engineer, in a survey of new T.H. #56 alignment, found a 6 inch by 6 inch concrete monument inplace, 12 inches below surface, 0.9 feet west of POT 1101+70.7.

1955 — E. L. Pehrson, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument, 3 feet below surface at Station 1101+70.7.

August 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 2 feet below the surface, 0.9 feet west of 1101+70.3.

1973 — M.H.D. resurfaced T.H. #56.

April 1975 — M.H.D. placed a cast iron monument above 6 inch by 6 inch concrete monument, 1/2 inch below new road surface.

An analysis of the record data indicates the concrete monument was set in 1930 to replace the oak stake with pottery around it. The concrete monument is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. "M" p.70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW/ Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 5/8" ϕ iron cast in concrete in center of 6" dia. clay tile.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a cast iron monument over 5/8" ϕ iron

SKETCH OF REFERENCE TIES

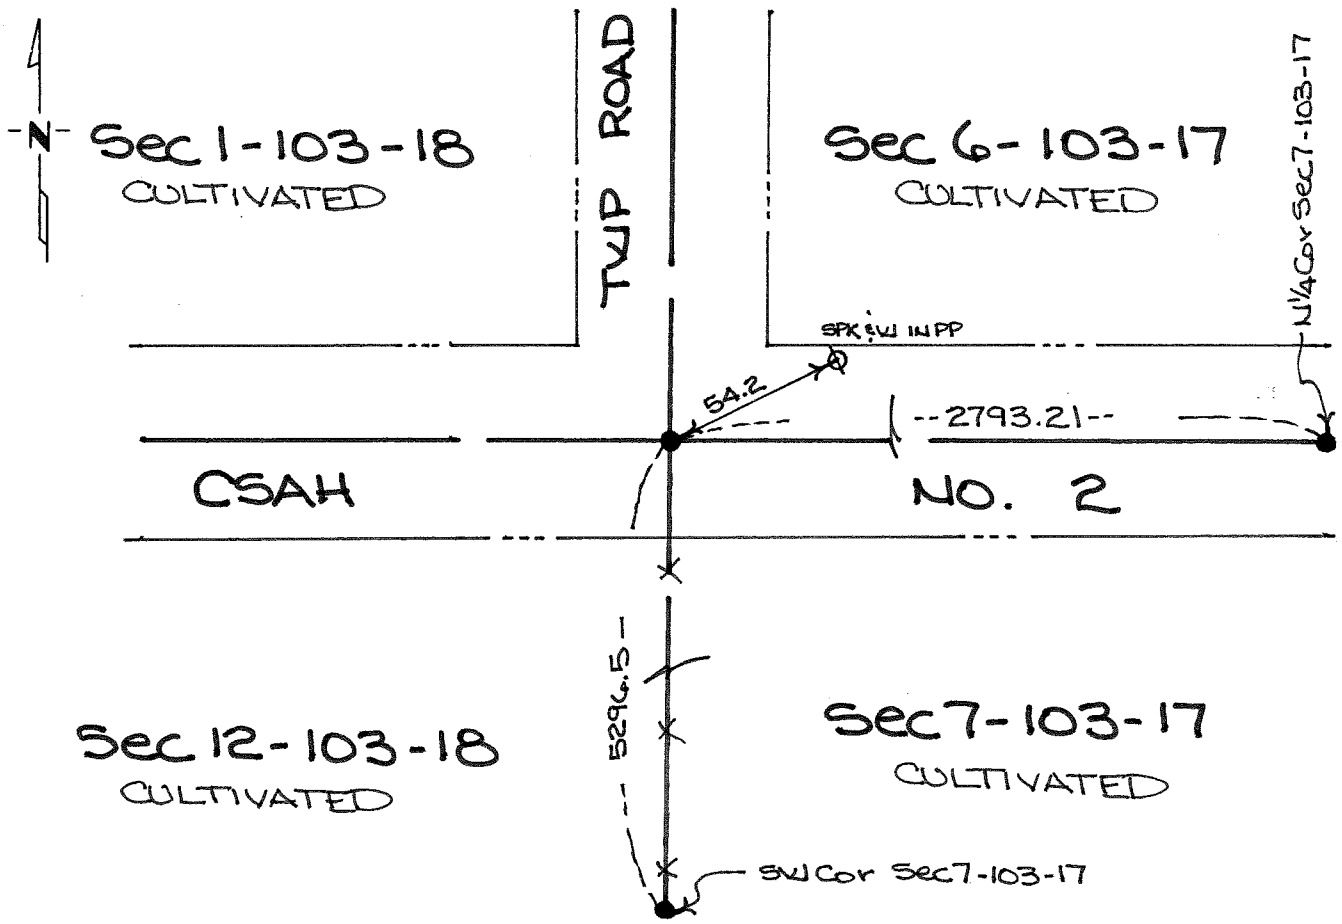

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-17

This corner was originally established by Elisha S. Norris, Deputy Surveyor for the U.S. General Land Office, in 1853. The government notes show corner was marked with a wood post; and ties were taken to bearing trees marked:

10" Burr Oak N 14° E 396 Links
10" Burr Oak N 3° W 425 Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows a tile monument was uncovered during grading project and ties were taken.

1987 Jones, Haugh & Smith Inc crew dug on centerline centerline on north-east-west road at location of good signal with metal locator. At a depth of 0.5 feet uncovered a 5/8"ø iron. Continued digging and at a depth of 2.5 feet below road surface, uncovered a 6" diameter clay tile with 5/8"ø iron cast in concrete. The monument was in old roadbed. Set cast iron monument over the 6" clay tile.

The monument found is in agreement with 1942 record and fits occupation and road centerlines within the section and is accepted as the best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. "K" p. 70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 6"dia. clay tile w/ 1/2"ϕ iron cast in concrete in the center of tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over 1/2"ϕ iron in tile

SKETCH OF REFERENCE TIES

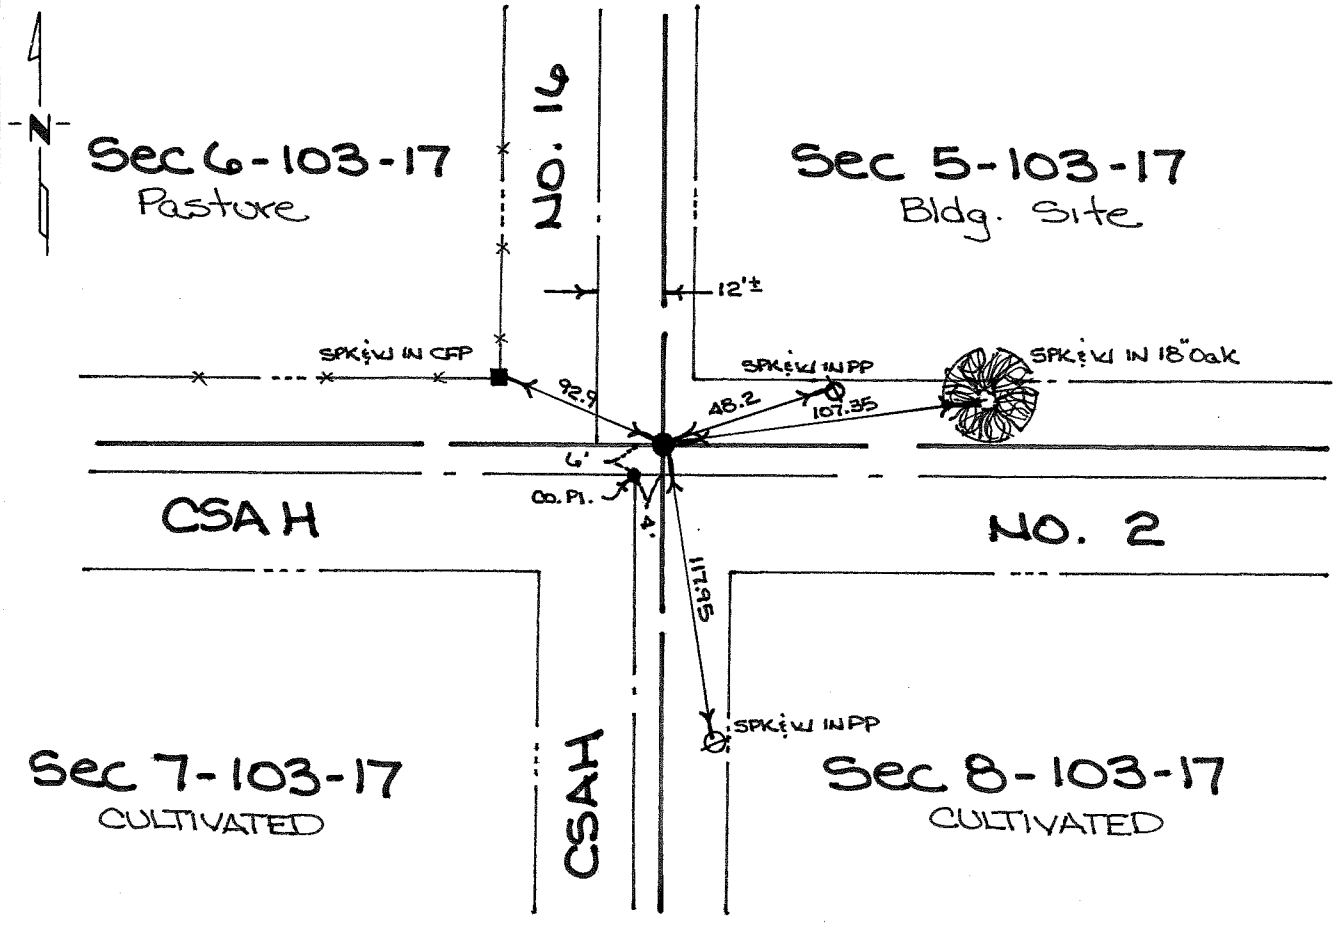

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-20-87
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 7-103-17

This corner was originally established by John Ball, Deputy Surveyor for the U.S. General Land Office. The government notes show the corner was marked with a wood post with mound and trench. Set charred stake in center.

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows a corner was uncovered during grading project four feet east and six feet north of County Pl. The corner was marked with a 3/4"ø iron.

1987 Jones, Haugh & Smith Inc crew dug a 2'x2' hole six feet north and four feet east of County Pl and at a depth of 1.5 feet. Below road surface in old roadbed uncovered a 6" diameter clay tile with 1/2"ø iron cast in concrete and set a cast iron monument over tile.

The monument found agrees with 1942 record and fits occupation and fence lines within the section and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. "I" P.70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

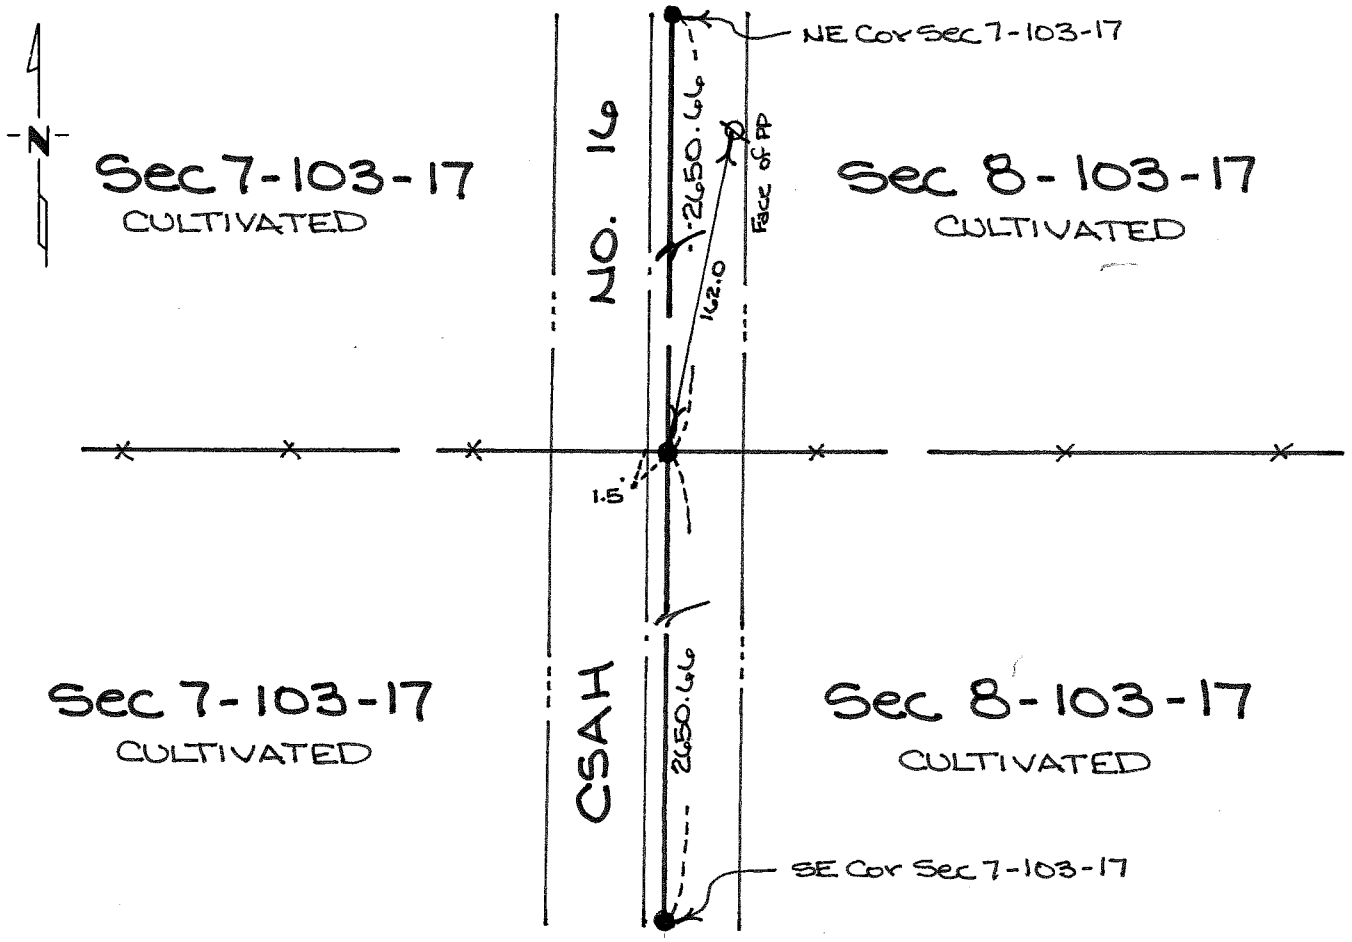

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$E\frac{1}{4}$ corner Sec 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show corner was marked with a wood post and ties were taken to bearing trees marked:

10" Burr Oak N 5^{o} E 625 Links
13" Burr Oak S 7^{o} W 388 Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department
Mower County Recorder
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 during County Road Grading Project no evidence of corner was found.

1987 Jones, Haugh & Smith Inc crew dug at the last location and found no evidence of the corner. Therefore established corner using lost methods, setting corner on a straight line between northeast and southeast corners at the midpoint.

Monument set fits occupation and road centerline within the section and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. "L" p 70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 5/8" ϕ iron on east side of pointed field stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over 5/8" ϕ iron

SKETCH OF REFERENCE TIES

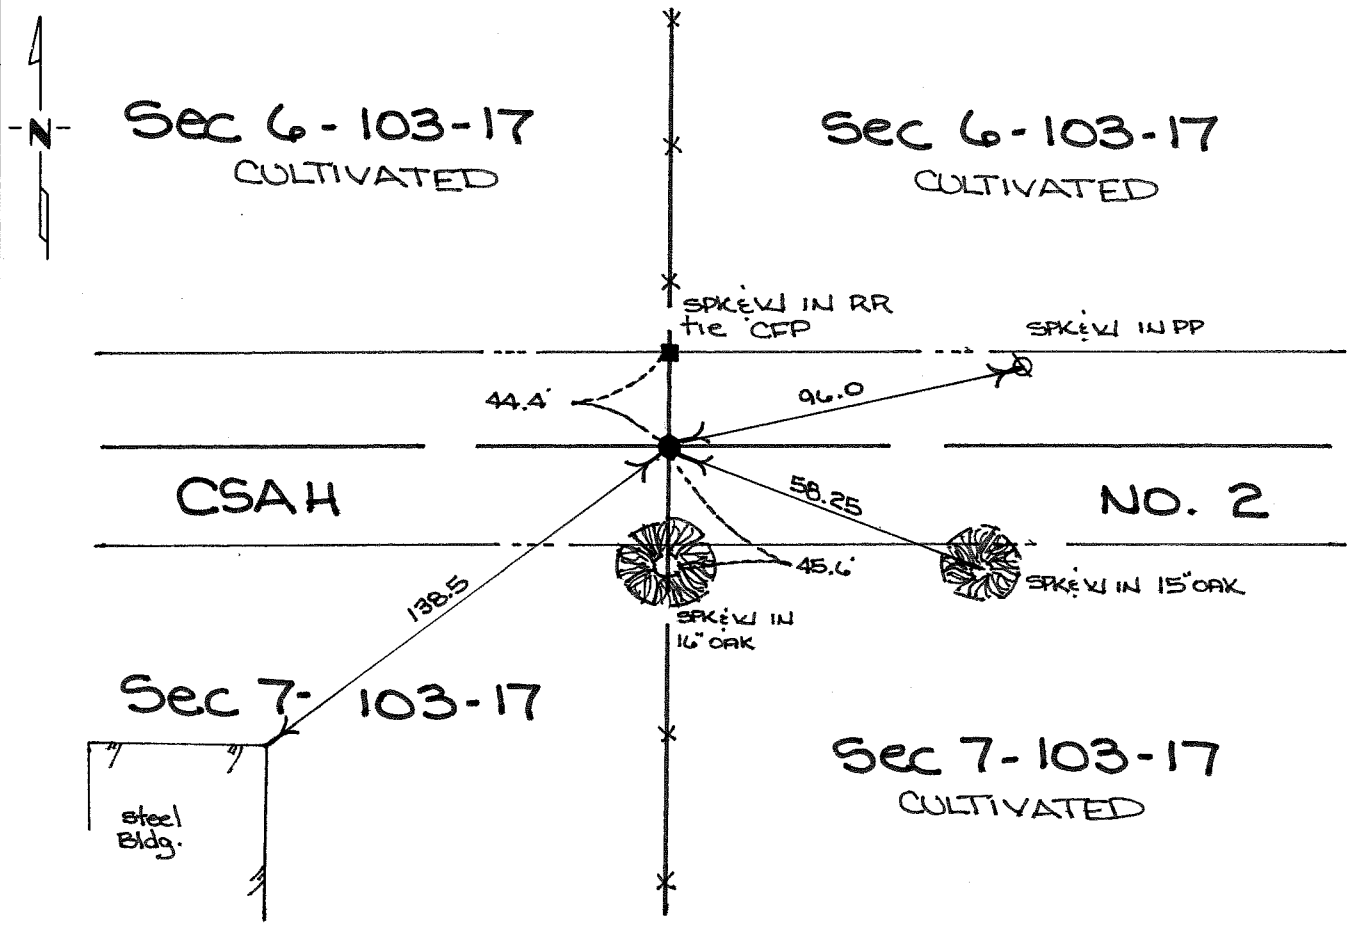

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N¼ corner Sec 7-103-17

This corner was originally established by John Ball, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show corner was marked with a wood post in mound with trench and drove charred stake.

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Chicago NorthWestern Transportation Company
Ray Tucker, Land Surveyor

The following information was obtained from Chicago NorthWestern Transportation Company:

1939 more or less, railroad stationing map showed centerline railroad 120 feet more or less, east of ¼ corner.

The following information was obtained from Mower County Highway Department:

1942 County Grading Plan shows no ¼ corner was found during grading project. Station given on fence at ¼ line and station on centerline of Chicago, Great Western Railroad agrees with information obtained from Chicago North-Western Transportation Company.

1987 Jones, Haugh & Smith Inc crew dug on centerline of east-west road in line with fence north-south at location of good signal with metal locater, 0.5 feet below road surface, uncovered a 5/8"ø iron. Continued digging and uncovered a 5/8"ø iron 2feet below road surface on the east side of a pointed field stone with remains of wood stake in virgin soil. Set cast iron monument over 5/8"ø iron.

The monument found fits occupation lines and road centerlines within the section and is in agreement with records from Chicago NorthWestern Transportation Company and Mower County Highway Department and is accepted as the original public land survey corner or a perpetuation thereof.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

"C" p 70

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 6" dia. clay tile w/ ½" sq. iron cast in concrete in center of tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over ½" sq. iron

SKETCH OF REFERENCE TIES

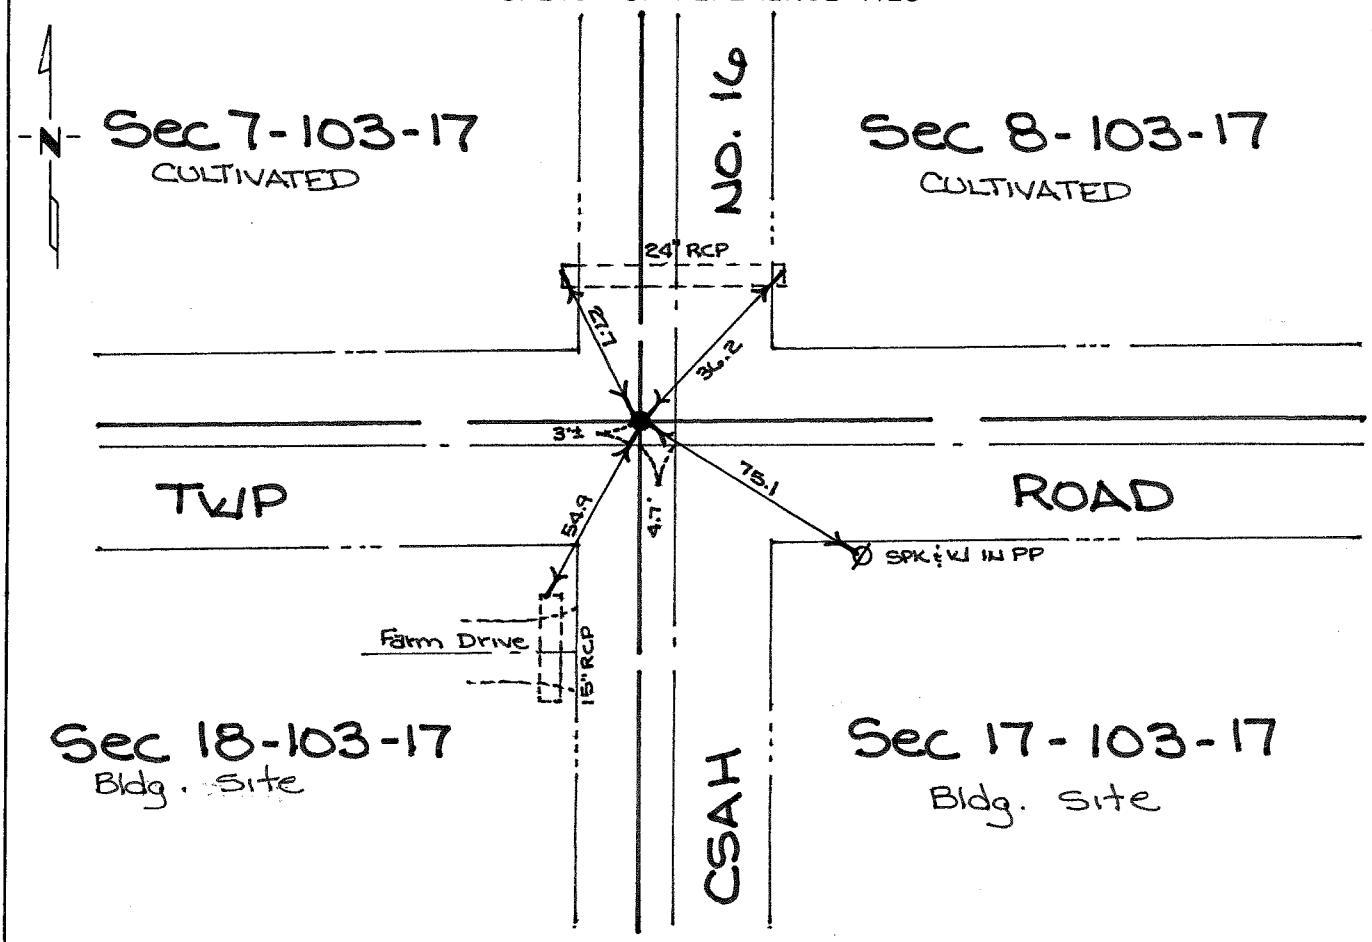

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 3-20-87 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show the corner was marked with a wood post and ties were taken to bearing trees marked:

8" Burr Oak	S 39° W	63	Links
9" Burr Oak	N 83° W	500	Links
8" Burr Oak	N 32° E	190	Links
14" Burr Oak	S 80° E	350	Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows corner west of PI, but gives no evidence of what was found.

1987 Jones, Haugh & Smith Inc crew dug at location of good signal with metal locator west of centerline PI at a depth of 0.5 feet uncovered a large spike. Continued digging and at a depth of 2 feet below road surface, uncovered a 6" diameter clay tile with a 1/2" square iron cast in concrete. Set cast iron monument over tile.

The location of the monument found agrees with 1942 record and fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis,contact Jones, Haugh & Smith Inc.

Index No. "I" P 20

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 4" dia. heavy wall pipe.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast iron monument over pipe.

SKETCH OF REFERENCE TIES

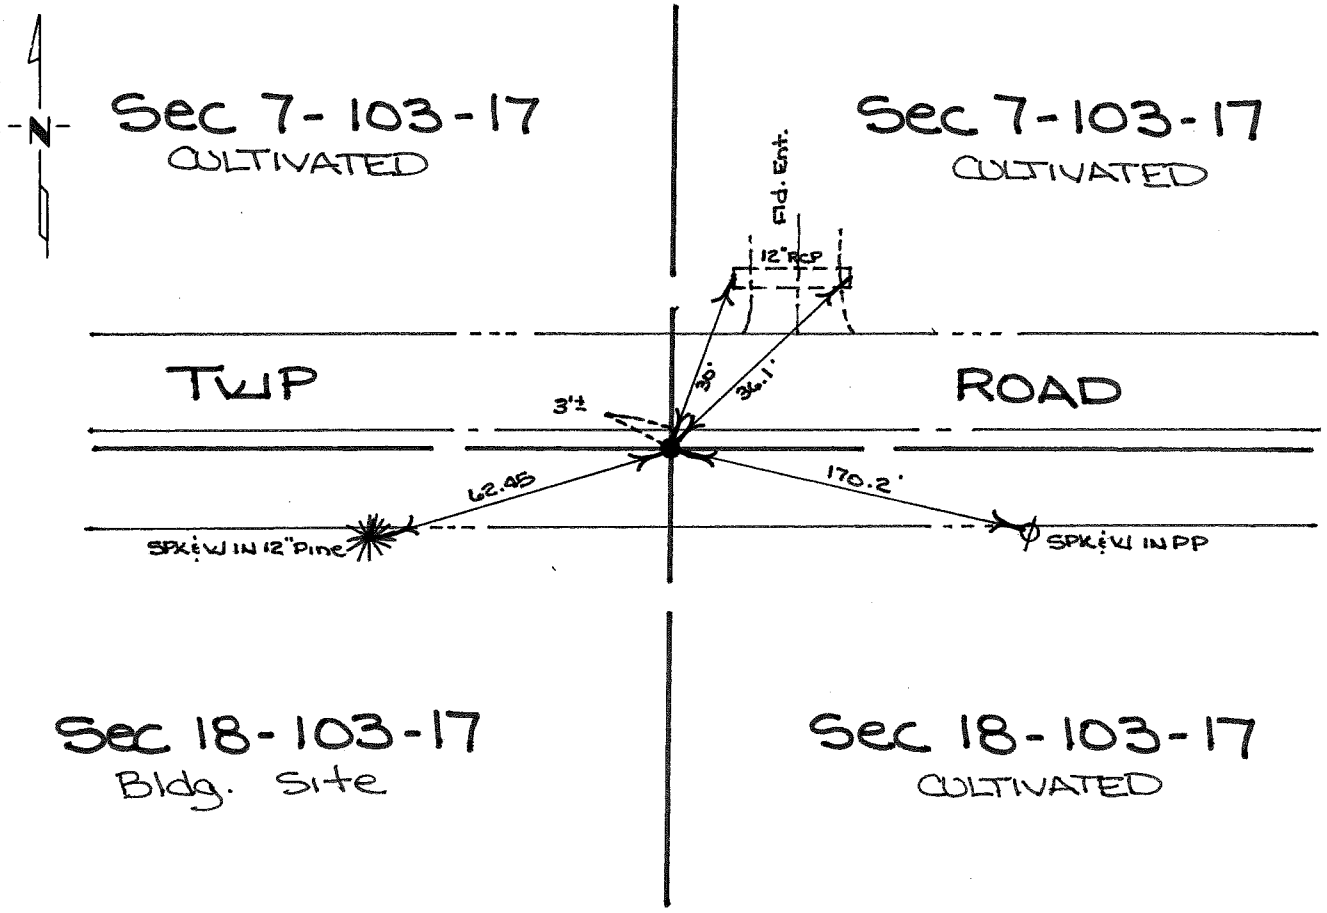

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$S\frac{1}{4}$ corner Sec 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show the corner was marked with a wood post and ties were taken to bearing trees marked:

16" Burr Oak S 38° E 105 Links
10" Burr Oak N 60° W 144 Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

1987 Jones, Haugh & Smith Inc crew dug at location of good dip with metal locater in line with fence north-south. At a depth of 2 feet below road surface, uncovered a 4" diameter heavy wall pipe in virgin soil. Set cast iron monument over pipe.

The monument found fits occupation lines and fence lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

"A" P. 70

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW1 Corner of Section 7, Township 103N, Range 17W1, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 6" dia. heavy wall pipe.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a Cast Iron monument over pipe.

SKETCH OF REFERENCE TIES

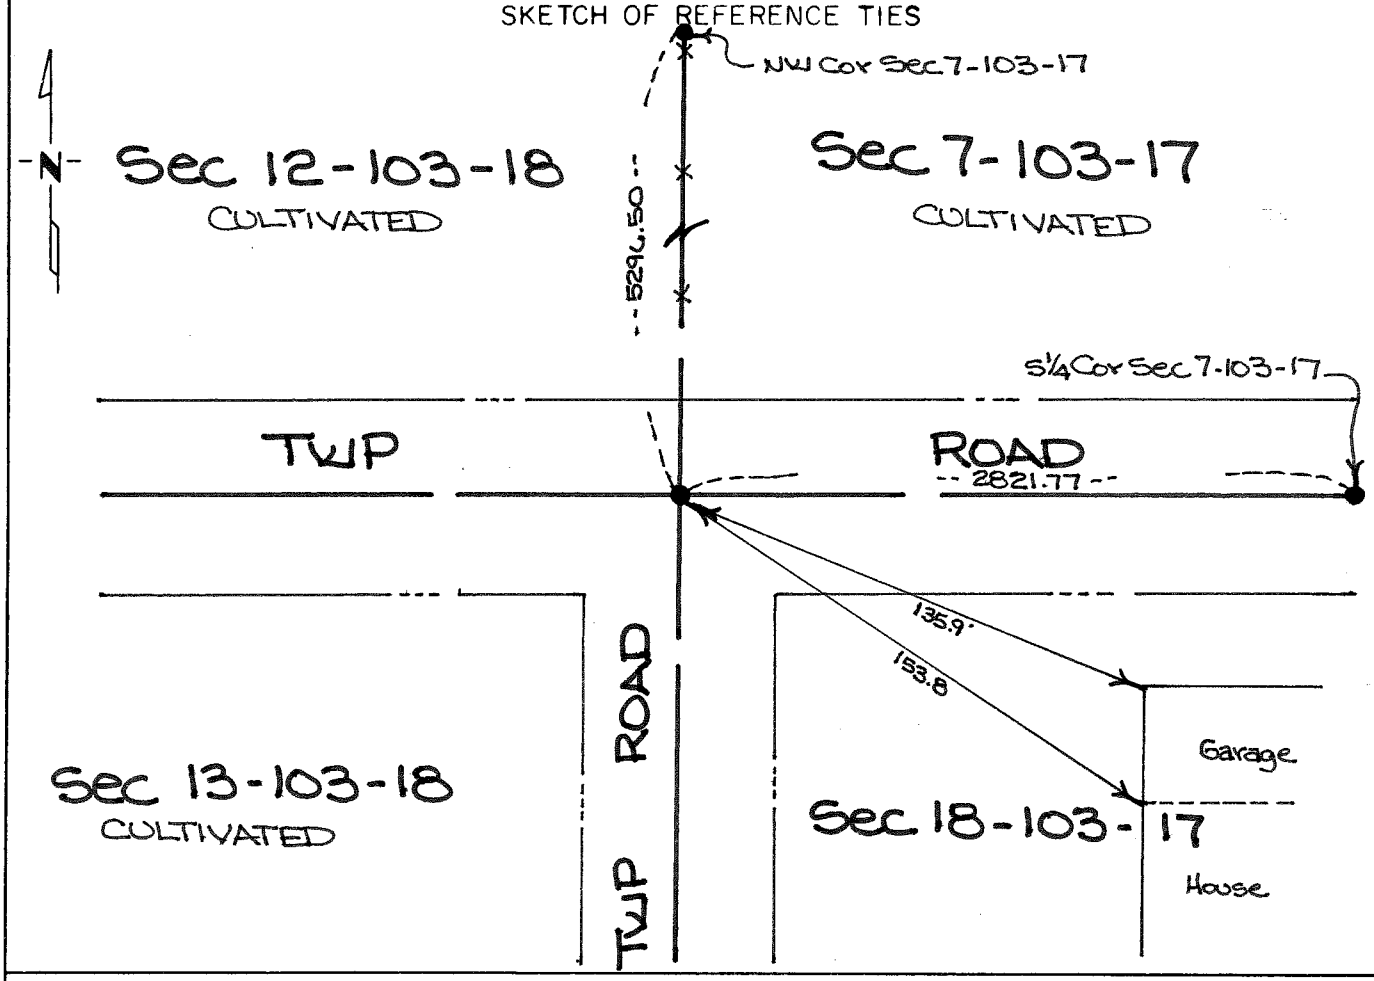

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 3-20-87 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-103-17

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show the corner was marked with a wood post and ties were taken to bearing tree marked: 8" Burr Oak S 34° E 450 Links, 10" Burr Oak N 33° W 440 Links.

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department
Mower County Recorder
Ray Tucker, Land Surveyor

1987 Jones, Haugh & Smith Inc crew uncovered a 5/8"ø iron on road surface. Removed and continued digging at a depth of 2 feet below road surface. Uncovered a 6" diameter heavy wall pipe in a nest of stones in virgin soil. 6" pipe was 2.2 feet west and 0.5 feet south of 5/8"ø iron found on road surface. Set cast iron monument over 6" diameter pipe.

The monument fits occupation and road centerline within the section and is accepted as the best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 8, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/18/1999 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/18/1999 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

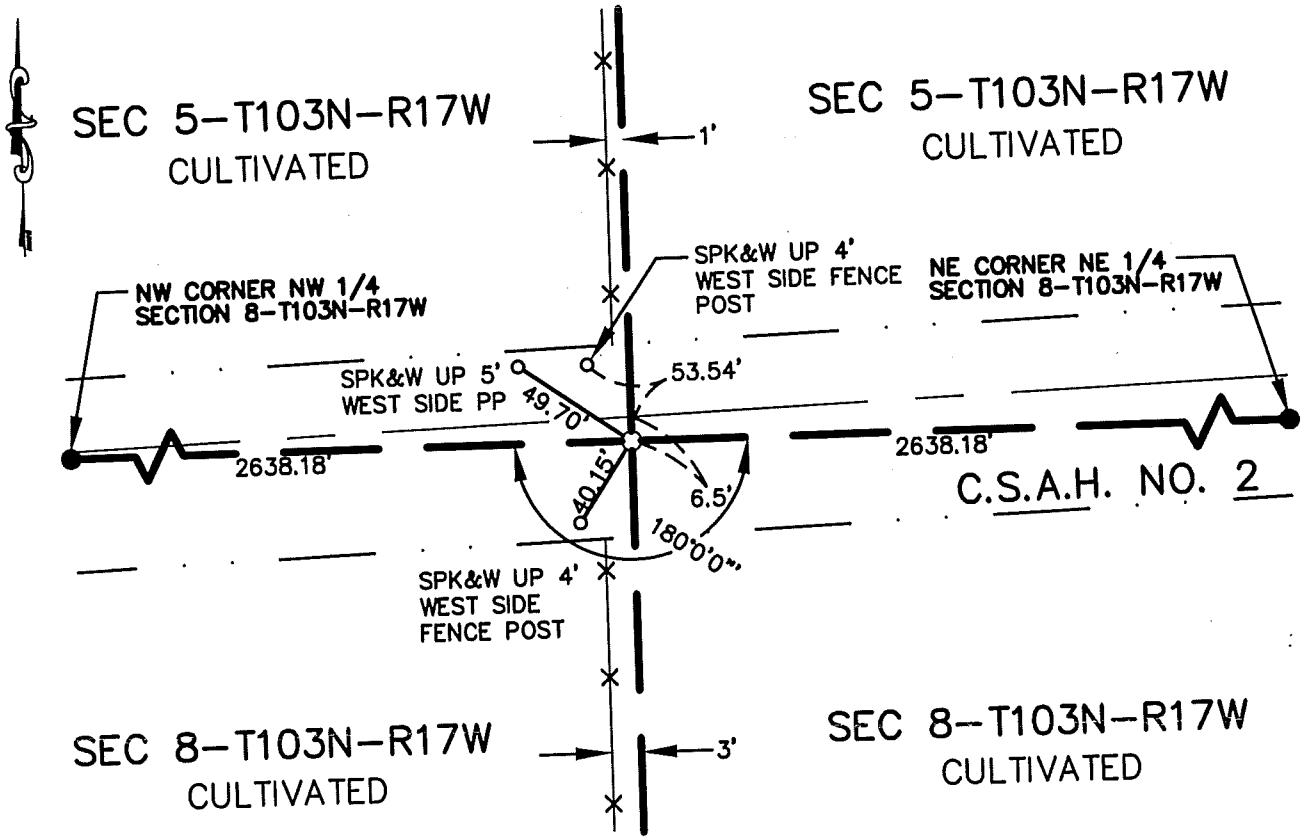

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-17-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 8-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying
Yaggy Colby and Associates

1938 Mower County road plan shows the section line is south of the centerline of C.S.A.H. No. 2, but shows no evidence of the original PLS corner.

1998 Yaggy Colby and Associates crew used centerline of C.S.A.H. No. 2 and fence lines N-S for corner.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at 6.5' south of the centerline of C.S.A.H. No. 2 and lost position and located no evidence of original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 9, Township 103N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-12-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-12-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

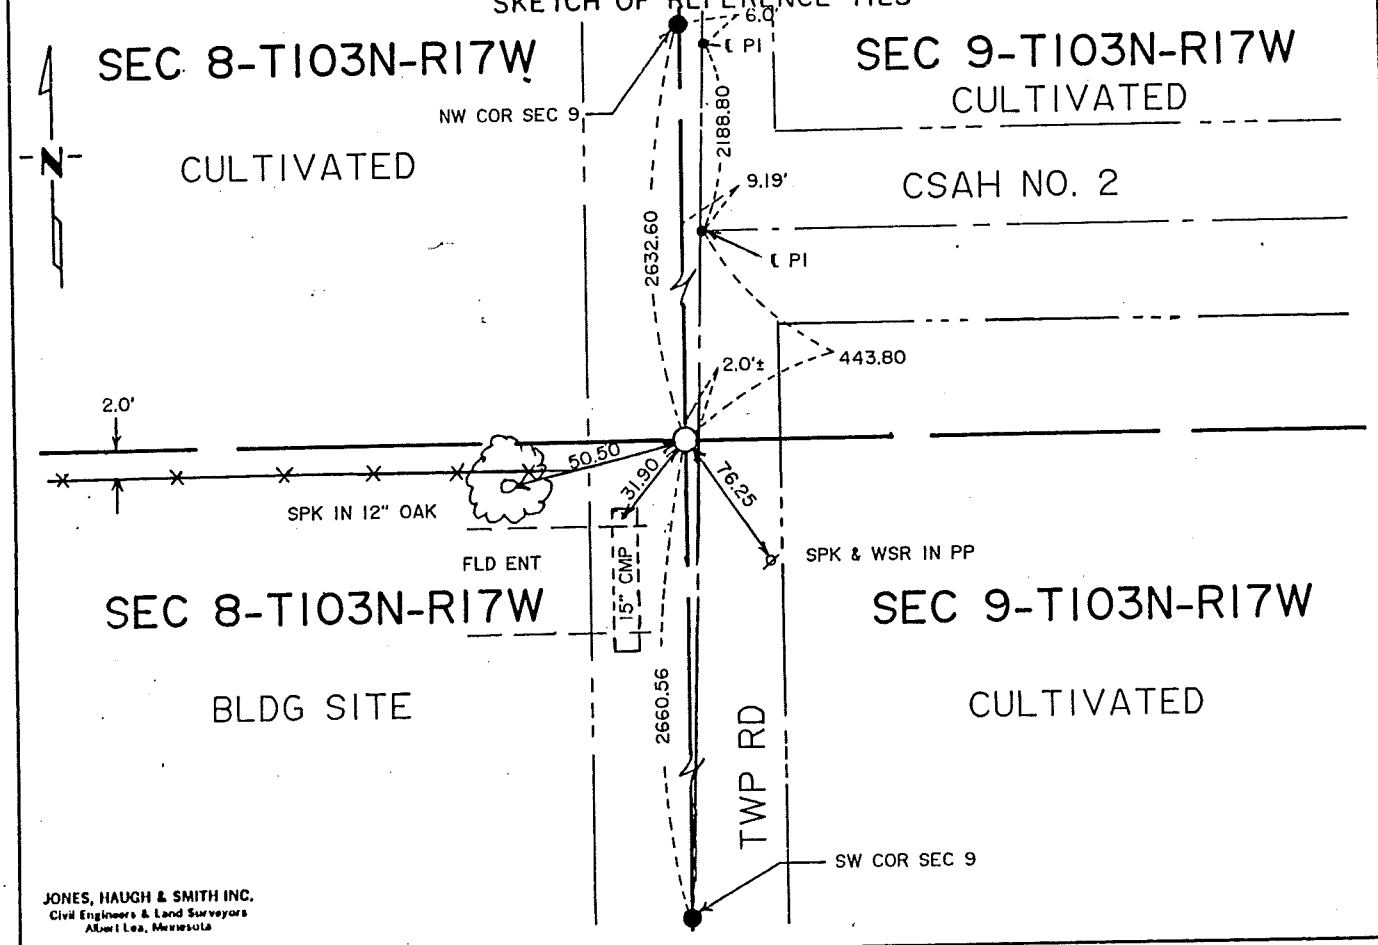

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-25-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ____

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 9-103-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1926 Mower County Engineering grading plan shows a monument inplace at a distance of 2632.6 feet south of the northwest corner of Section 9.

1941 Mower County Engineering new grading plan shows a monument inplace at a distance of 412.5 feet south of centerline PI.

1942 Mower County Highway Department regraded county road north of 1/4 corner and was not built according to 1941 plan and no as-builts were made as was later discovered during extensive research.

1991 Zenk Engineering and Land Surveying dug with a backhoe at location of 1/4 corner and no records were obtained to document what was found or set if anything.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the Mower County backhoe at two locations a 6'x20'x6' deep hole was dug at a point 412.5 feet south of County PI and no evidence was found. Therefore dug a 6'x25'x6' deep hole at a location on the centerline township road where a fence line extended from the west intersected road and found no evidence. While digging discovered a mixture of dirt to support evidence of excavating by Zenk Engineering in 1991. After finding no evidence the Mower County Engineer (Ray Guttormson) was consulted about the location of the County Road 412.5 feet north of said 1/4 corner. He noted road was adjusted in the field and no notes were ever taken as of its location relative to the W 1/4 corner. Therefore after locating the northwest corner of the section we used a distance of 2632.60 feet south as given in 1926 road plan to re-set the W 1/4 corner.

This position fits occupation, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.

"C" TIE BOOK P108

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-5-72 (DATE) found a STONE MONUMENT 3 FEET BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ARROWS STONE, 1/2 INCH BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

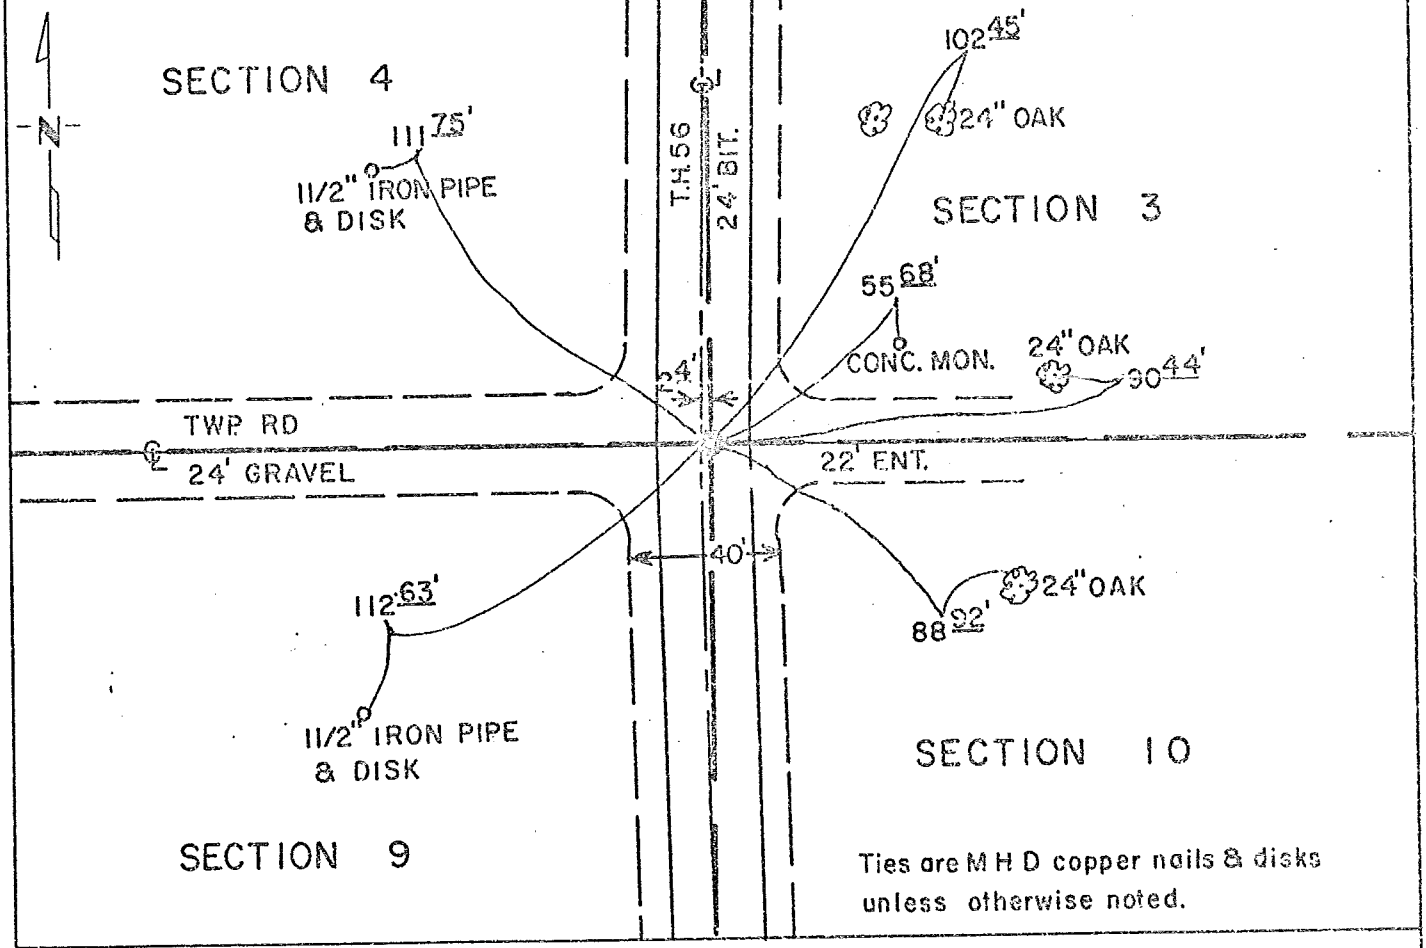

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Lockwood 9/8/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 9, TOWNSHIP 103N, RANGE 17W, 5th P.M.

October 1854 — William I. Anderson, Deputy Surveyor, set post for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found the corner stone from old ties by the county surveyor 2.4 feet east of PI 1049+01.3.

1941 — O. J. Gerner, M.H.D. Engineer, found the corner stone 2.4 feet east of PI 1049+01.3, down 18 inches.

1955 — E. L. Pehrson, M.H.D. Engineer, found the corner stone 2.57 feet east of PI 1049+01.3, down 18 inches.

July 1972 — A. L. Sotebeer, M.H.D. Engineer, found the corner stone 3 feet below the inplace road surface, 2.4 feet east of PI 1049+01.3.

1973 — M.H.D. resurfaced T.H. 56 with Bituminous.

April 1975 — M.H.D. placed a cast iron monument above the stone, 1/2 inch below new road surface. An analysis of the record data indicates the corner stone was found, using the County Surveyor's ties, in 1929. The stone is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 9, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-30-90 (DATE) placed a chiseled "X" in concrete on T.H. NO. 56 3.4' west of ℄.

SKETCH OF REFERENCE TIES

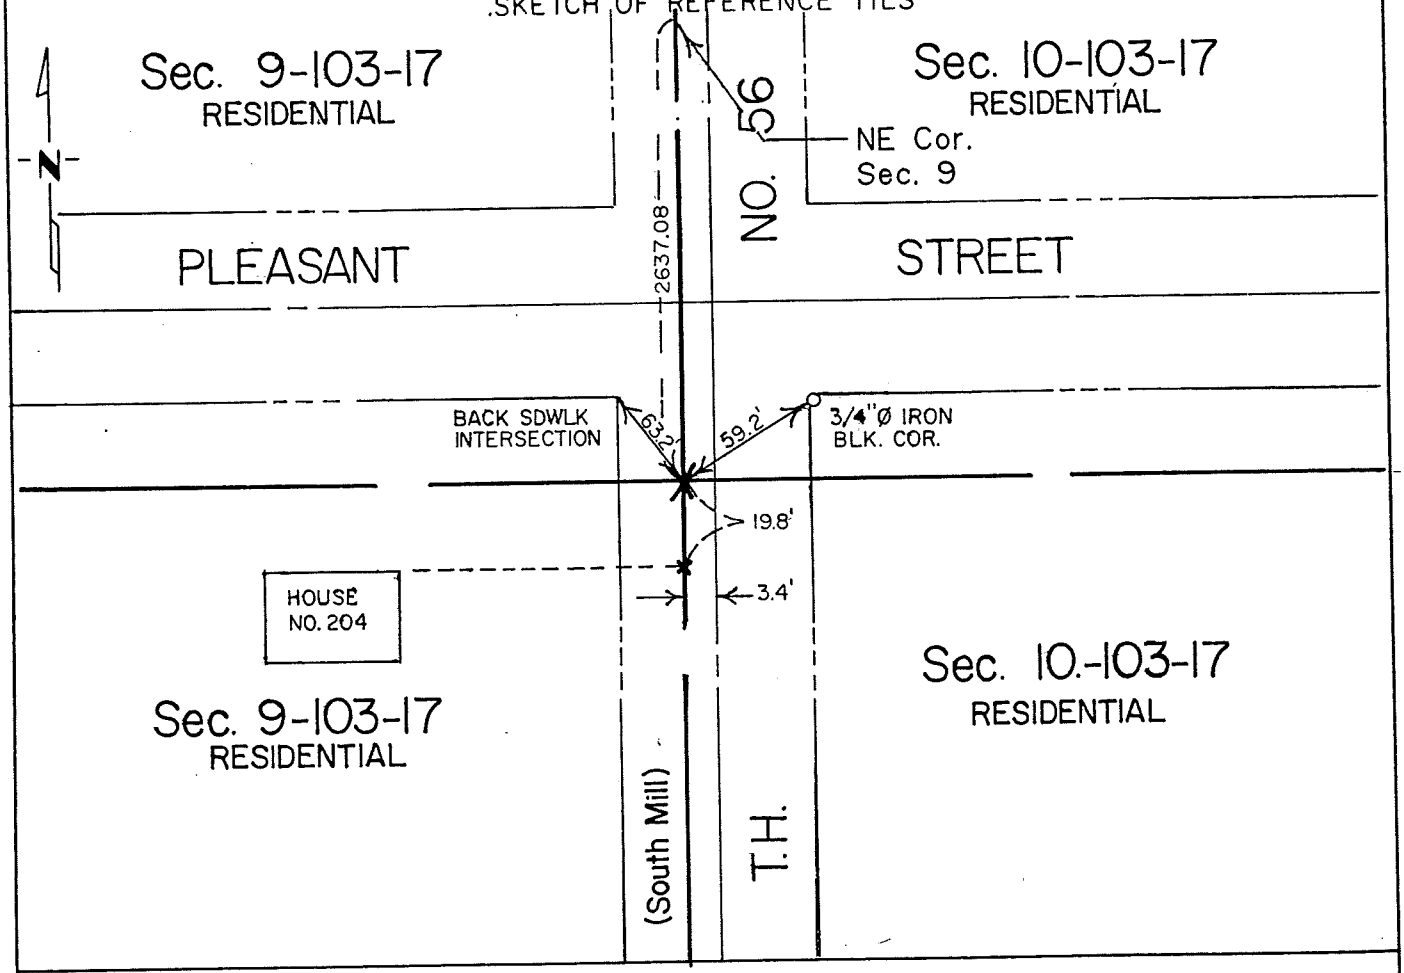

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 9-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

11" Burr Oak	S 68° W	440 links (290.40 ft)
14" Burr Oak	N 45° E	60 links (39.60 ft)

The following were contacted for section corner information:
Mower County Engineering Dept.
Mower County Recorder's Office

1990 Jones, Haugh & Smith Inc crew using plat information from the Village of Brownsdale and Minnesota Department of Transportation information on Trunk Highway No. 56 right-of-way, established position of 1/4 corner and placed a chiseled 'X' in concrete pavement 3.4 feet west of centerline crack of highway.

The corner fits plats in the Village and occupation within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9, Township 103N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-12-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-12-92 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

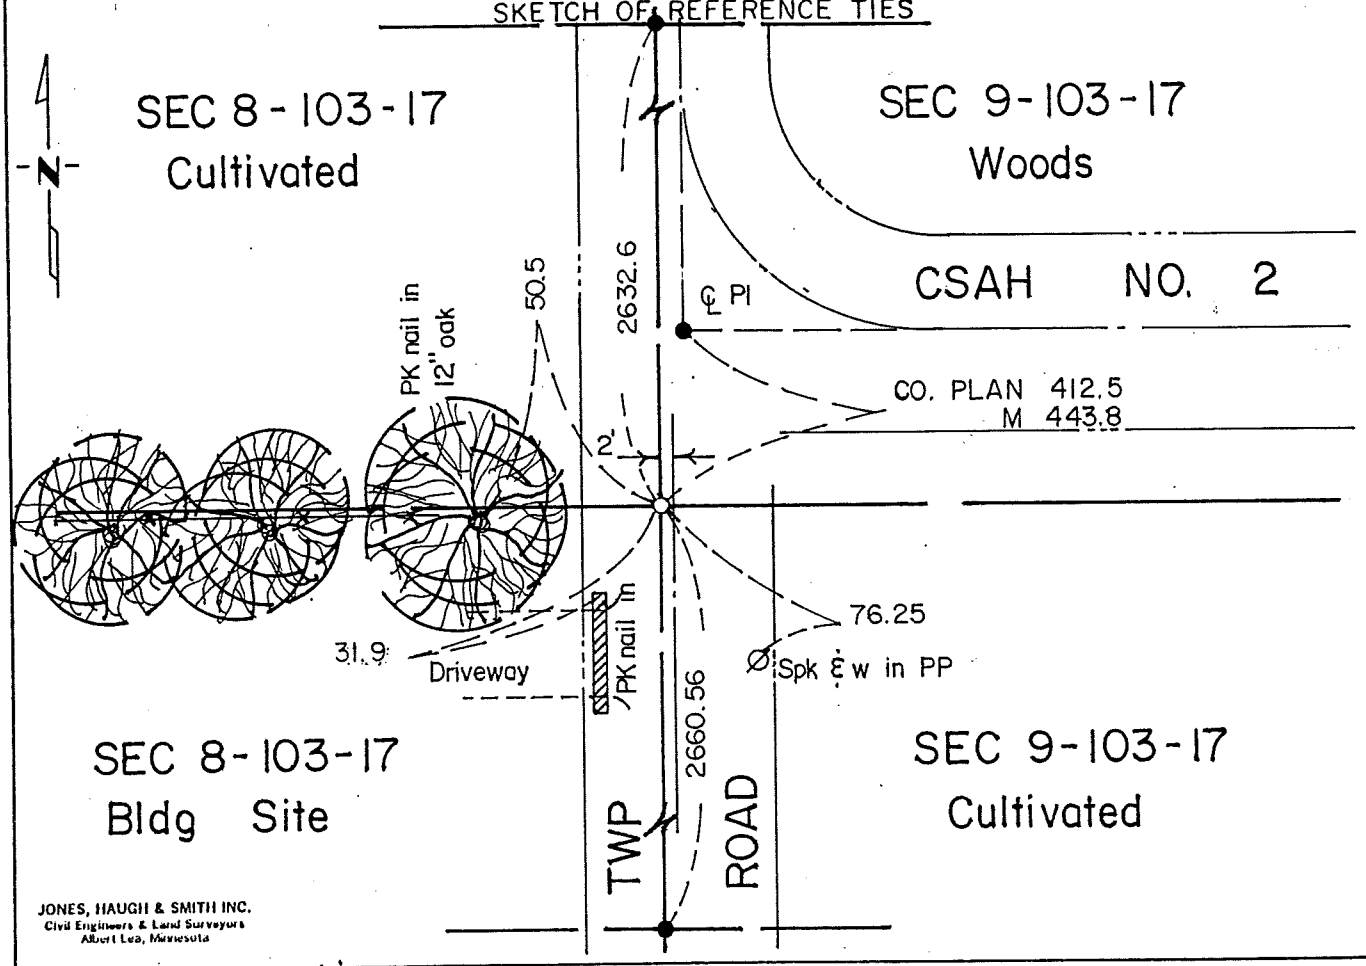

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-20-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 9-103-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak	N 21° E	155 links (102.30 ft)
14" Burr Oak	S 6° W	68 links (44.88 ft)

The following were contacted for section corner information:

Mower County Hwy Dept	Zenk Engineering
Mower County Recorder's Office	Ray Tucker, RLS

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1926 Mower County grading plan shows a monument found at 1/4 corner and was also recorded in Book 'A' page 36 in the Office of the County Engineer. The records indicate corner was 412.5 feet south of centerline PI Sta 234+11, and a distance of 2632.6 feet south of northwest corner Section 9.

1941 Mower County grading plan shows tile monument inplace at new PI Sta 232+18.6. Plans show PI as being 412.5 ft north of the W 1/4 corner Section 9 as shown on 1926 Plans.

1942 Recorded in Book 'A' in the Office of the County Engineering. Tile monument was found at PI Sta 232+18.6 and no mention of 1/4 corner

1991 Zenk Engineering dug with a backhoe at this location. No records were obtained to indicate what was found and the exact location of the excavation.

1992 Jones, Haugh & Smith crew after finding no evidence of W 1/4 corner perpetuation, dug with the County backhoe at a point 412.5 feet south of centerline PI Sta 232+18.6 and found no evidence. After further research and consulting with County Engineering, Ray Guttormson, concluded the County Road was moved during 1941 Grading Project six feet east of section line and the PI Sta 232+18.6 was moved north and the tie of 412.5 ft south to 1/4 corner was no longer any good. Using information from the 1926 Grading Plan which shows a distance of 2632.6 ft south of the northwest corner of section, dug a 5'x30'x6' hole and found no evidence of public land survey corner or a perpetuation thereof. A resident living at this location said Zenk Engineering had obliterated the road 40 feet long and dug to a depth of 8 ft and did not find anything. Therefore projected fence line east from across Section 8 on 1/4 line and found position to be within 2 ft of using distance from 1926 County Plans. Set cast iron monument at a point 2632.6 feet south of northwest corner on a straight line between section corners. From this position measured north to fence line east at 1/16 line and found fence to be within 0.5 feet of being at the midpoint.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CTR. of Section 10, Township 103N, Range 17W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch:

☐ On 8-29-91 (DATE) found a ½"ø IRON OVER A ¾"ø IRON WITH A 1" SQUARE HEAD DRIVEN INTO A WOOD POST ON THE SOUTH SIDE OF A POINTED FIELD STONE.
☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-29-91 (DATE) placed a CAST IRON MONUMENT OVER STONE FOUND.

SKETCH OF REFERENCE TIES

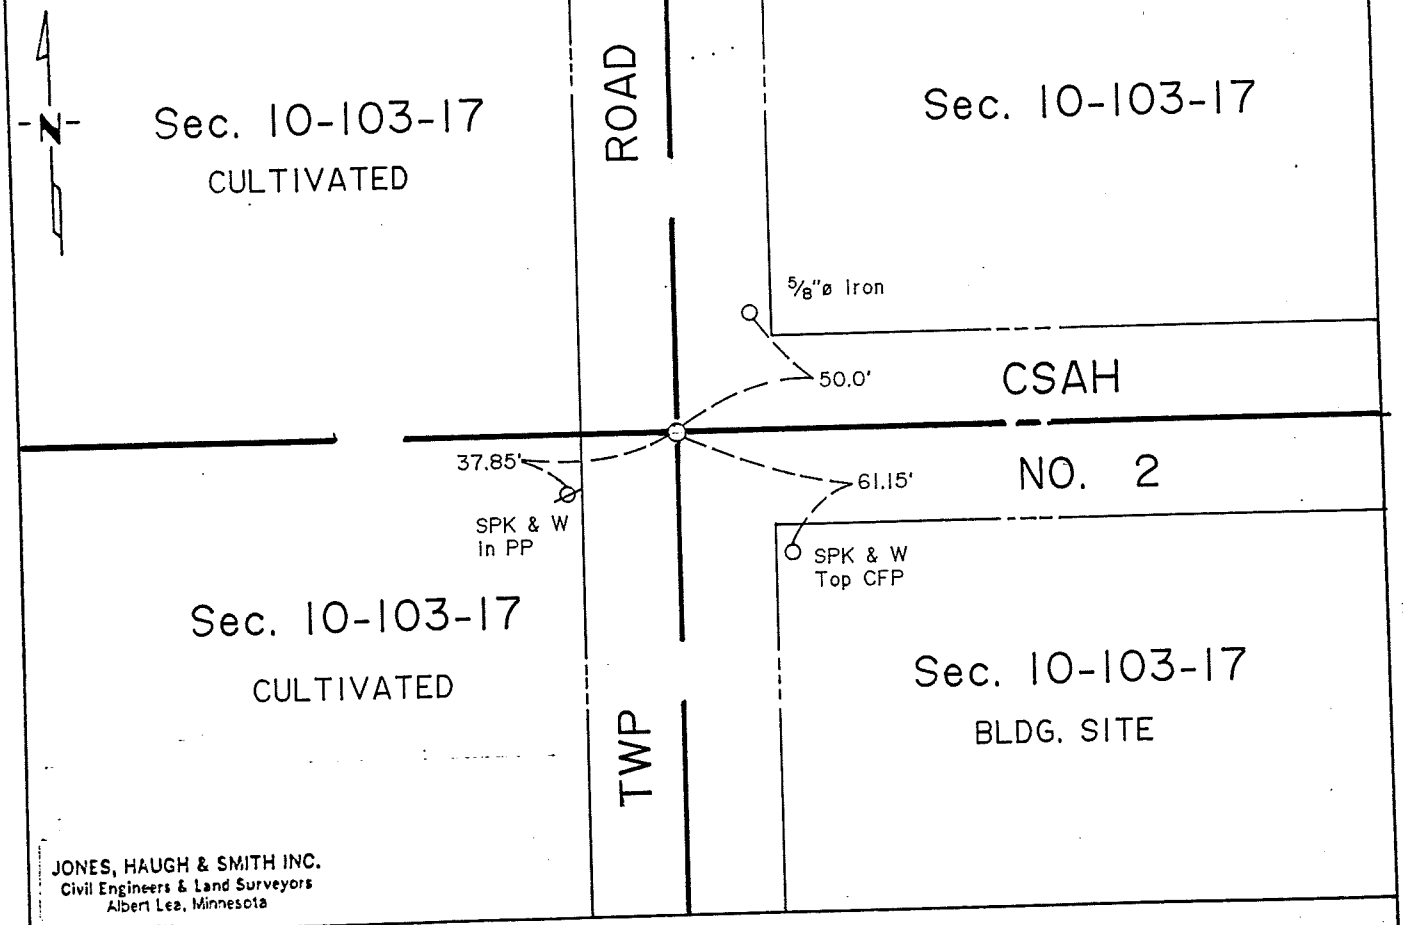

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13867

☐ Land Surveyor, ☐ Professional Engineer
☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

Center Sec 10-103-17

This corner was not established during original public land survey in 1854.

The following information was obtained to support evidence of the occupation of monuments at the center of section.

1930 Mower County Grading Plan shows a pointed field stone inplace and ties were taken and recorded in Book 'A' in the Office of the County Engineer.

1941 Mower County Highway Department employees uncovered a pointed field stone and new ties were taken and recorded in Book 'A'.

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe for 1991-92 Grading Project and uncovered a 1/2" diameter iron 0.5 feet below road surface. Continued digging and uncovered a 3/4" diameter iron with 1" square held driven into wood post on south side of pointed field stone. Set cast iron monument over stone on road surface.

The monument found fits occupation and road centerlines within the section and agrees with various plats within the Village of Brownsdale.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 11, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/09/2000 (DATE) found a CAPPED 5/8 IRON OVER POURED CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/09/2000 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

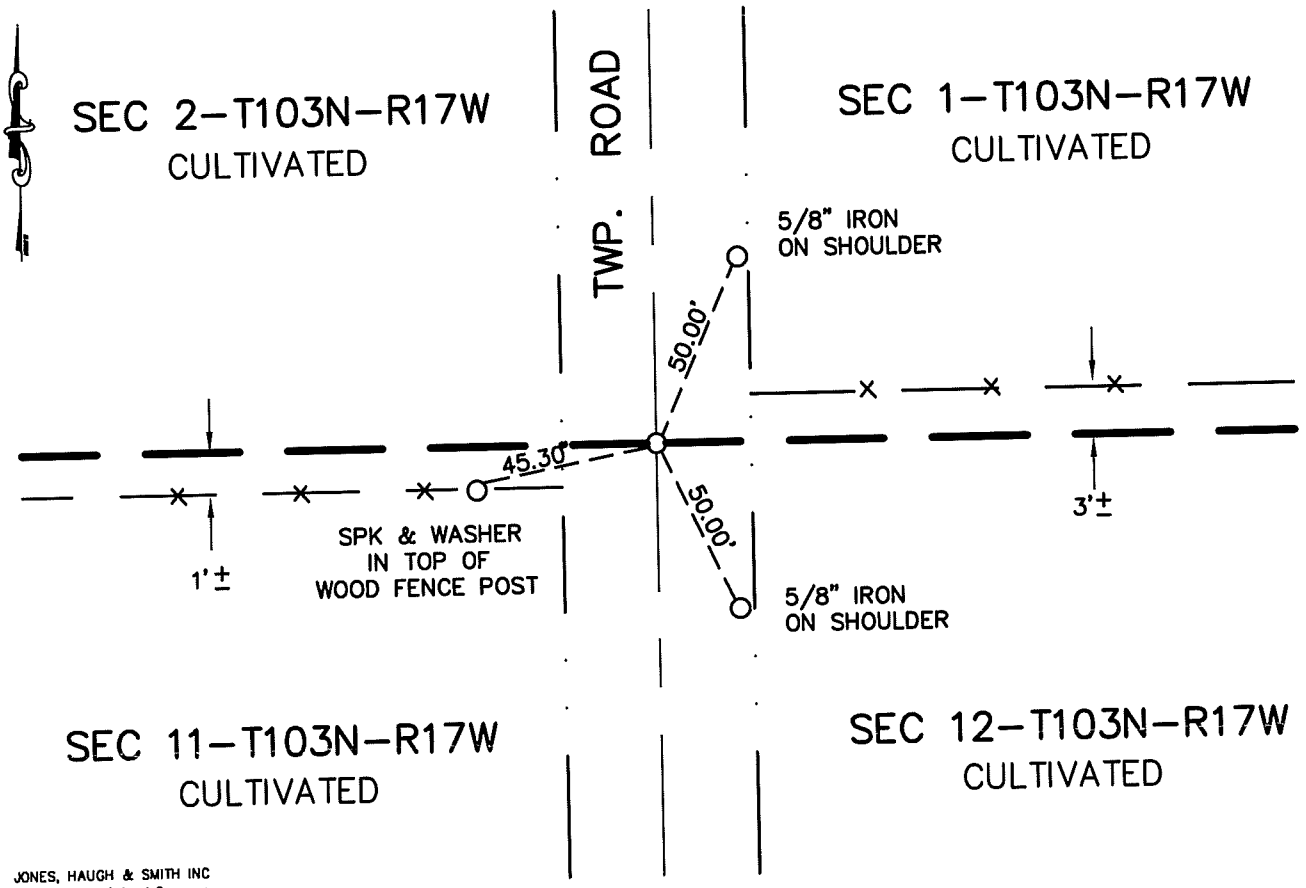

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-14-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 11-103-17

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1892 Clausen's field notes show 40.01 chains on west line of Northwest ¼.

1978 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, surveyed NE ¼ NW ¼ Sec. 12 and used intersection of centerline and fence line running East.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of centerline of Twp. Road and fence line running east. Uncovered a poured concrete monument dated 1956, and a 5/8" iron capped 13807 over monument. Placed 5/8"x24" iron with Cast Iron Monument over concrete monument found. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-29-91 (DATE) found a 3/4"ø×16" PIPE OVER A 1" SQUARE SHAFT IN OLD ROAD BED OVER A 10"×10" SQUARE POINTED STONE WITH OLD LATH ON WEST SIDE IN VIRGIN SOIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-29-91 (DATE) placed a CAST IRON MONUMENT OVER STONE

SKETCH OF REFERENCE TIES

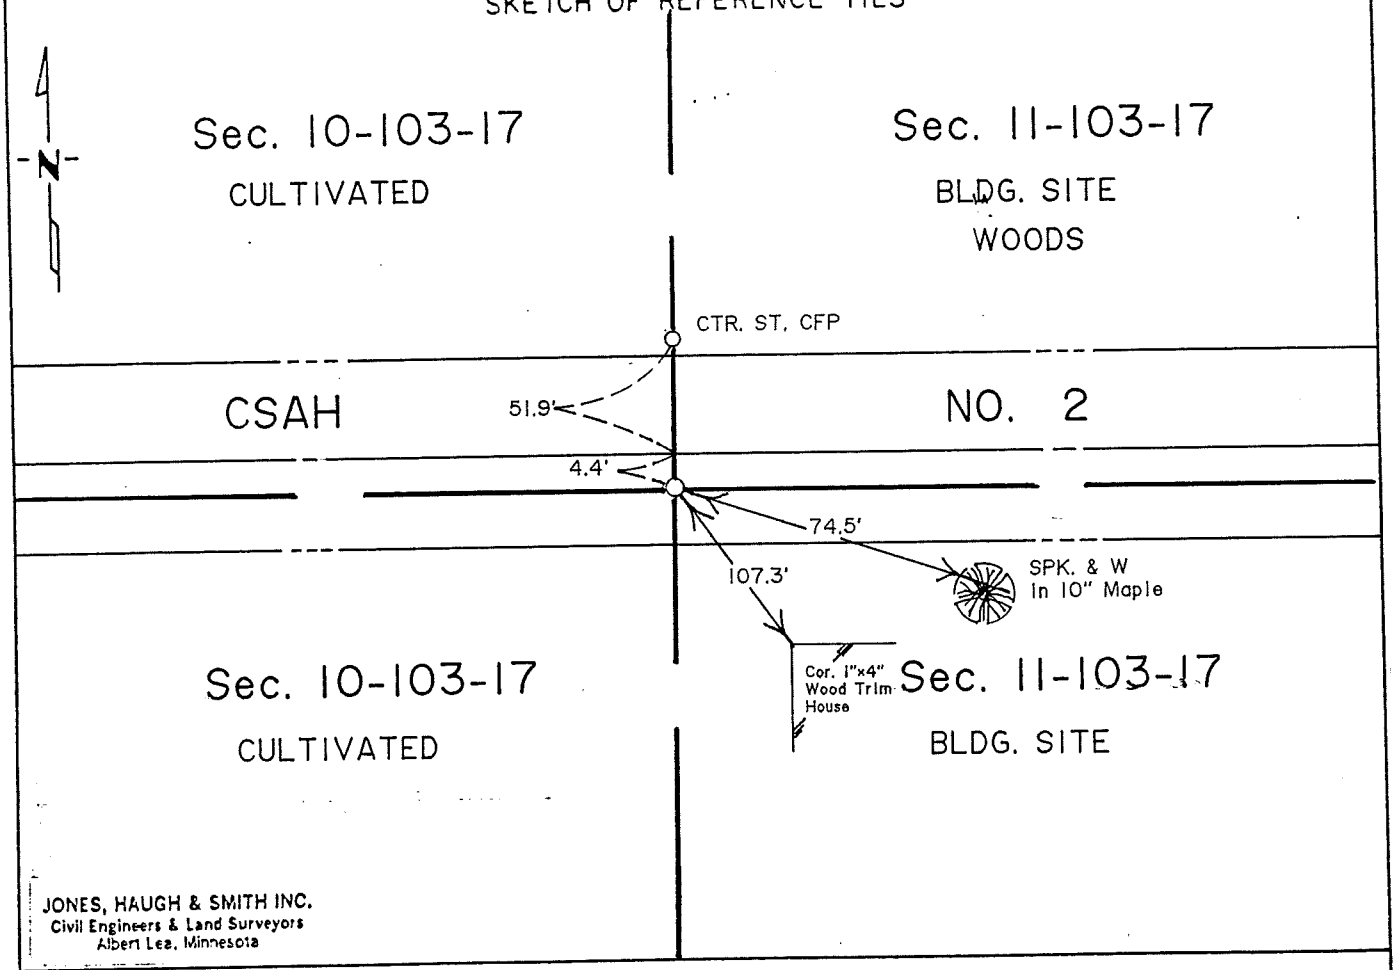

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-21-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 11-103-17

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

11" Burr Oak	N 21° E	85 links (56.10 ft)
12" Burr Oak	N 63° W	160 links (105.60 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1942 Book 'A' of the Mower County Engineer's Office show a tile monument inplace. The following ties were taken:
61.25' ENE to north end C.M.
61.8' ESE to south end C.M.
50.0' NW to T.P.

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe at a point 3 feet south of centerline in line with fence north. Uncovered a 3/4" diameter x 16" pipe 1.0 feet deep over a 1" square shaft in an old roadbed. Continued digging and found a 10"x10" square pointed stone with an old lath on west side. Placed a 5/8" diameter x 16" iron capped 13807 on west side of stone and set a cast iron monument over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 12, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a FENCE LINE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/27/1995 (DATE) placed a CAPPED 5/8 IRON

SKETCH OF REFERENCE TIES

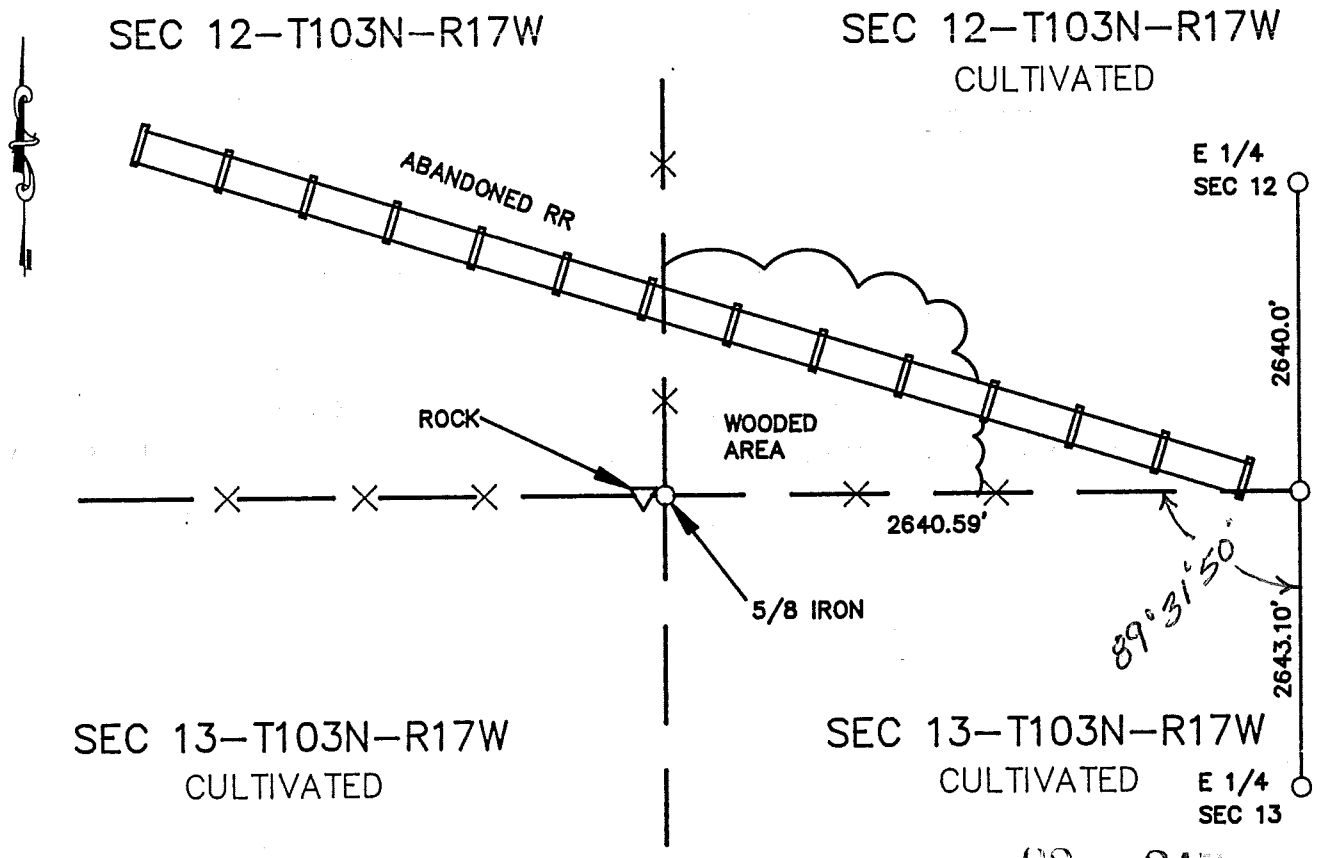

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 247

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-23-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A .M. on the 27 day of August A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447401

M.H.D. FORM NO. 2105

Book 92 misc Pg 247

S 1/4 Cor SEC 12-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at this location but found no evidence of the original corner. A 5/8" iron was set in line with the E-W fence and in line with the fence to the north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 12, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/27/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

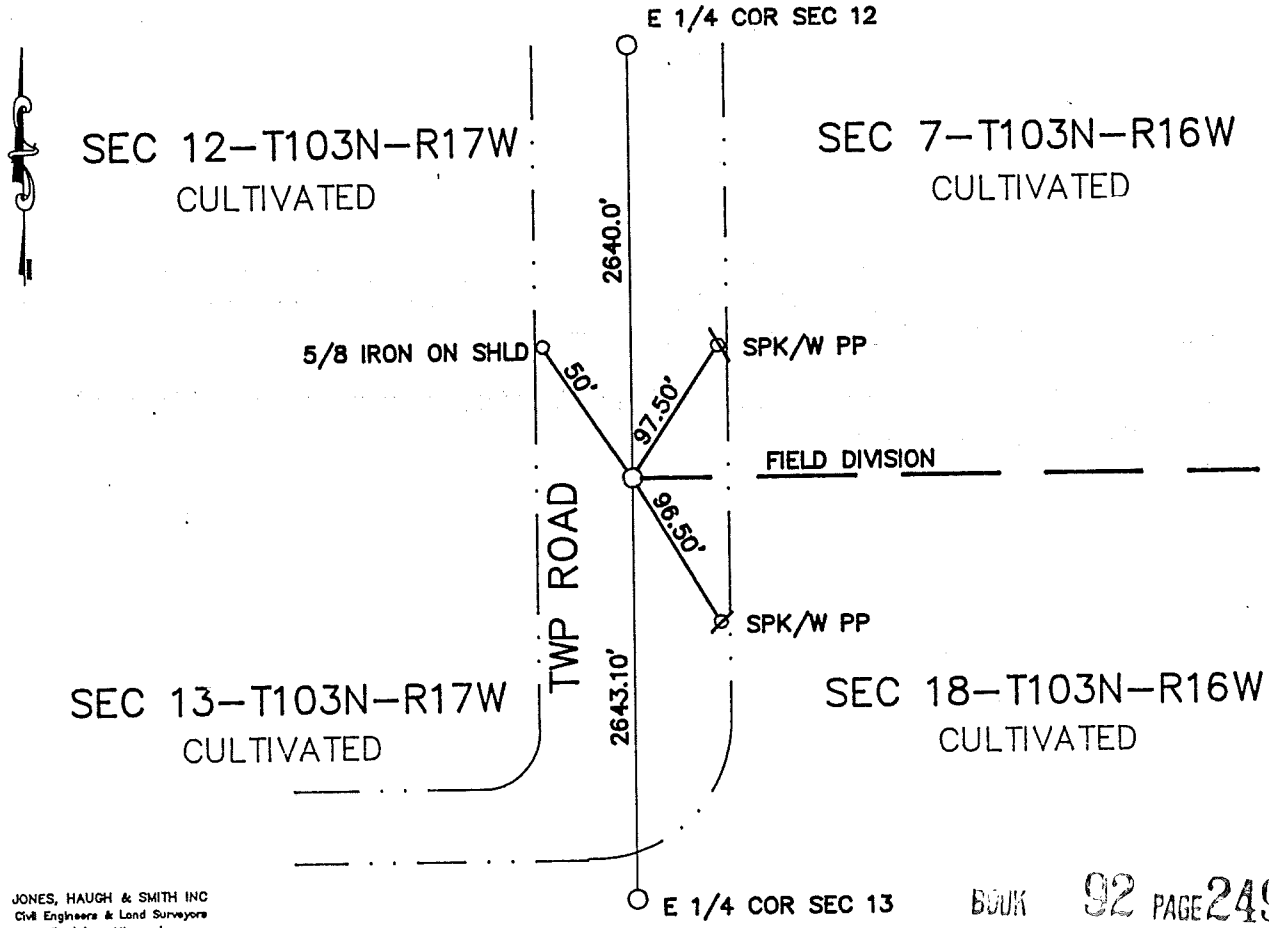

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 249

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447402

M.H.D. FORM NO. 2105

Book 92 Misc Pg 249

SE Cor SEC 12-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of twp road and in line with field division east. Dug a 15' x 4' hole 5.50' deep and found no evidence of PLS corner. Set 5/8" x 16" iron with cast iron monument on centerline of road and in line with field division east and found a distance of 2640.0' from E 1/4 section 12 and a distance of 2643.10' from the E 1/4 corner section 13.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 12, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 5/8"Ø x 24" re-bar on west side of field stone over a 8"Ø x 20" long pointed nigger head.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument over nigger head.

SKETCH OF REFERENCE TIES

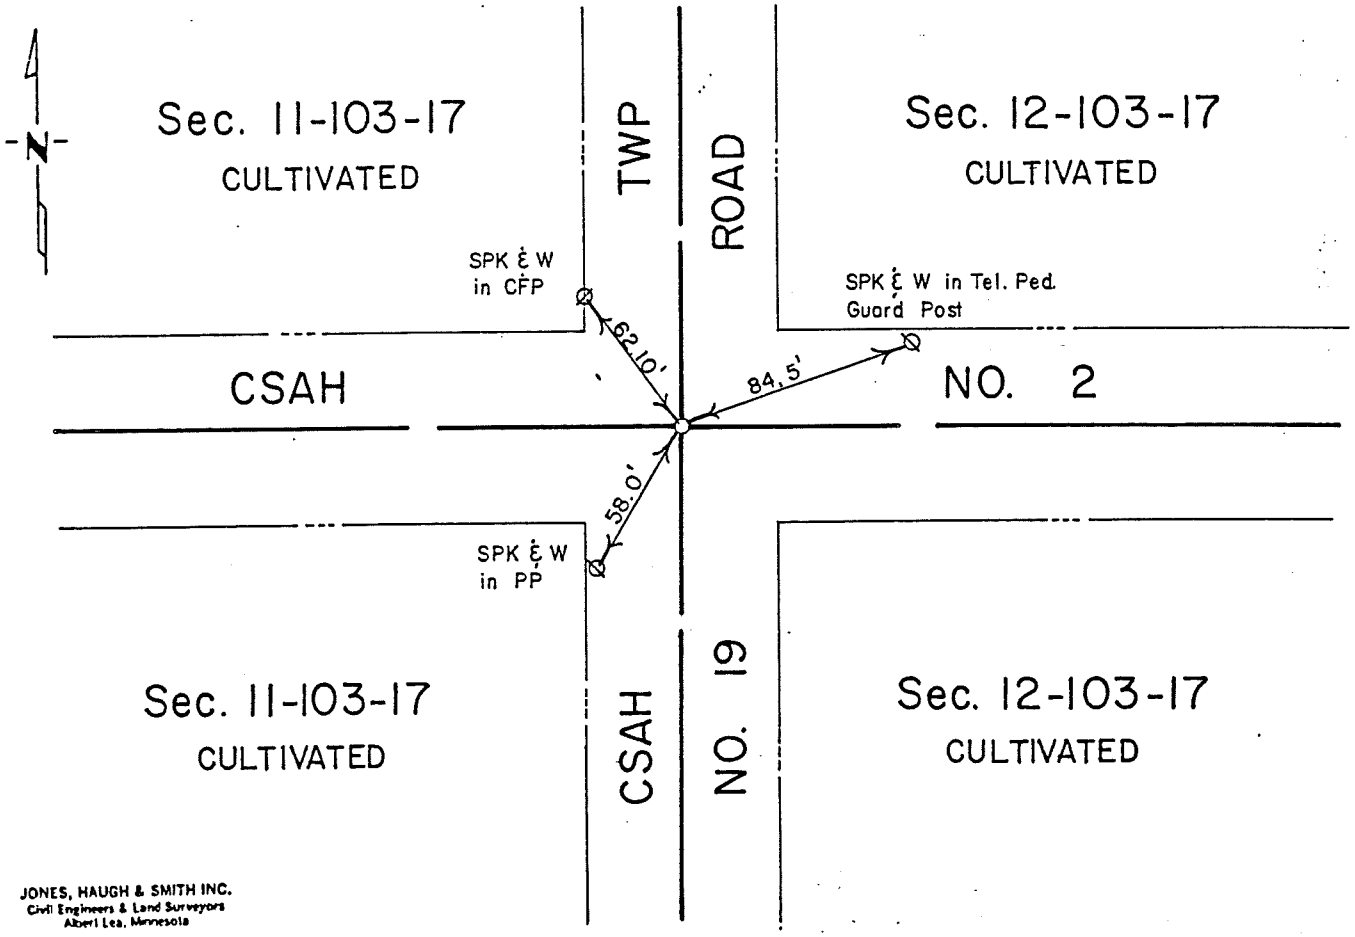

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 12-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Minnesota Department of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1892 Clausen Mower County Surveyor from 1890-1900 uncovered a wood post during a survey of the S 1/2 of Section 12-103-17.

1941 Recorded in Book "A" in the office of the Mower County Engineer, it shows a pointed stone inplace and ties were taken.

1945 The County uncovered a pointed stone and ties were taken in 1941 and were checked.

1950 The County Grading Plan shows monument inplace at Station 394+38.

1968 Jones & Haugh Inc crew found PK nail on centerline centerline of roads during private survey.

1986 Ray Tucker, RLS 15471, uncovered a 5/8" diameter iron on centerline centerline of roads.

1989 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron 2 feet below the road surface during a private survey in the NW 1/4 Section 11-103-17.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe under the direction of John H. Schulte for 1991 Grading Project SAP 50-619-50. Dug a 4' x 8' x 6' deep hole and uncovered a 5/8" diameter x 24" iron on the west side of the field stone. The stone found was found in a fill section and not accepted as the corner noted in the 1941 records. Continued digging and uncovered a 8" x 20" long pointed nigger head with wood stake on the west side of the stone 5' more or less below the road surface. Placed a 5/8" diameter x 24" iron on the south side of the stone and set a cast iron monument over the stone on the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a bridge spike over a 5/8"Ø x 24" re-bar 1.0' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

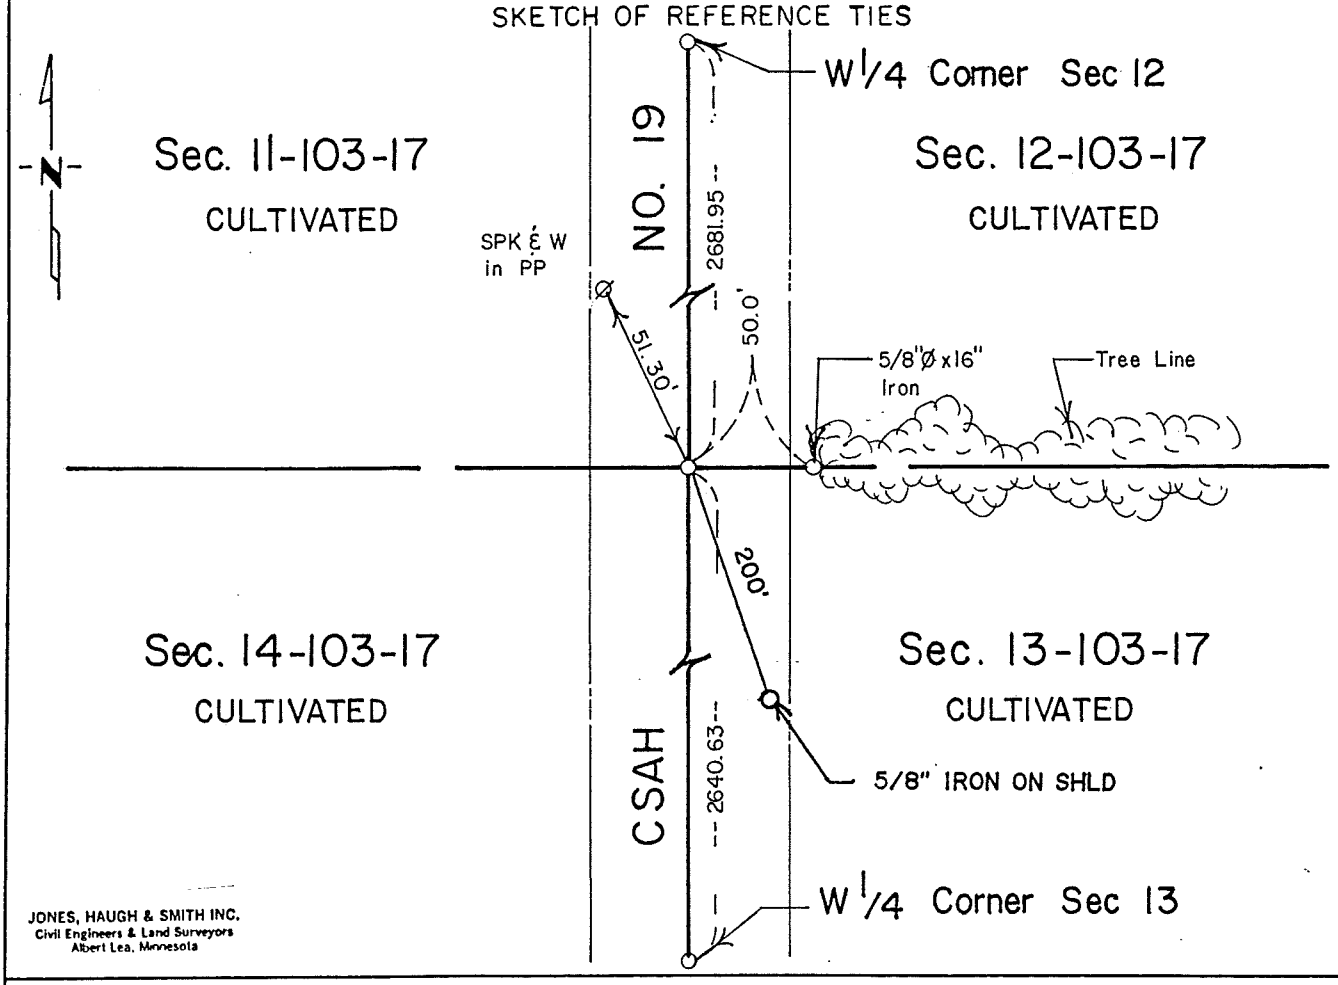

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter x 24" long iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the NW 1/4 of Section 13-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter x 24" iron and took ties. Information was recorded in Book "A" in the office of the County Engineer. No certificate of location was filed.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, RLS 13807, dug with the Mower County backhoe and uncovered a 5/8" diameter x 24" long iron 1.0 feet below the surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Set a cast iron monument at the location of 5/8" diameter iron.

1997 Re-set (road surface)

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a bridge spike over a 5/8"Ø x 24" re-bar 1.0' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

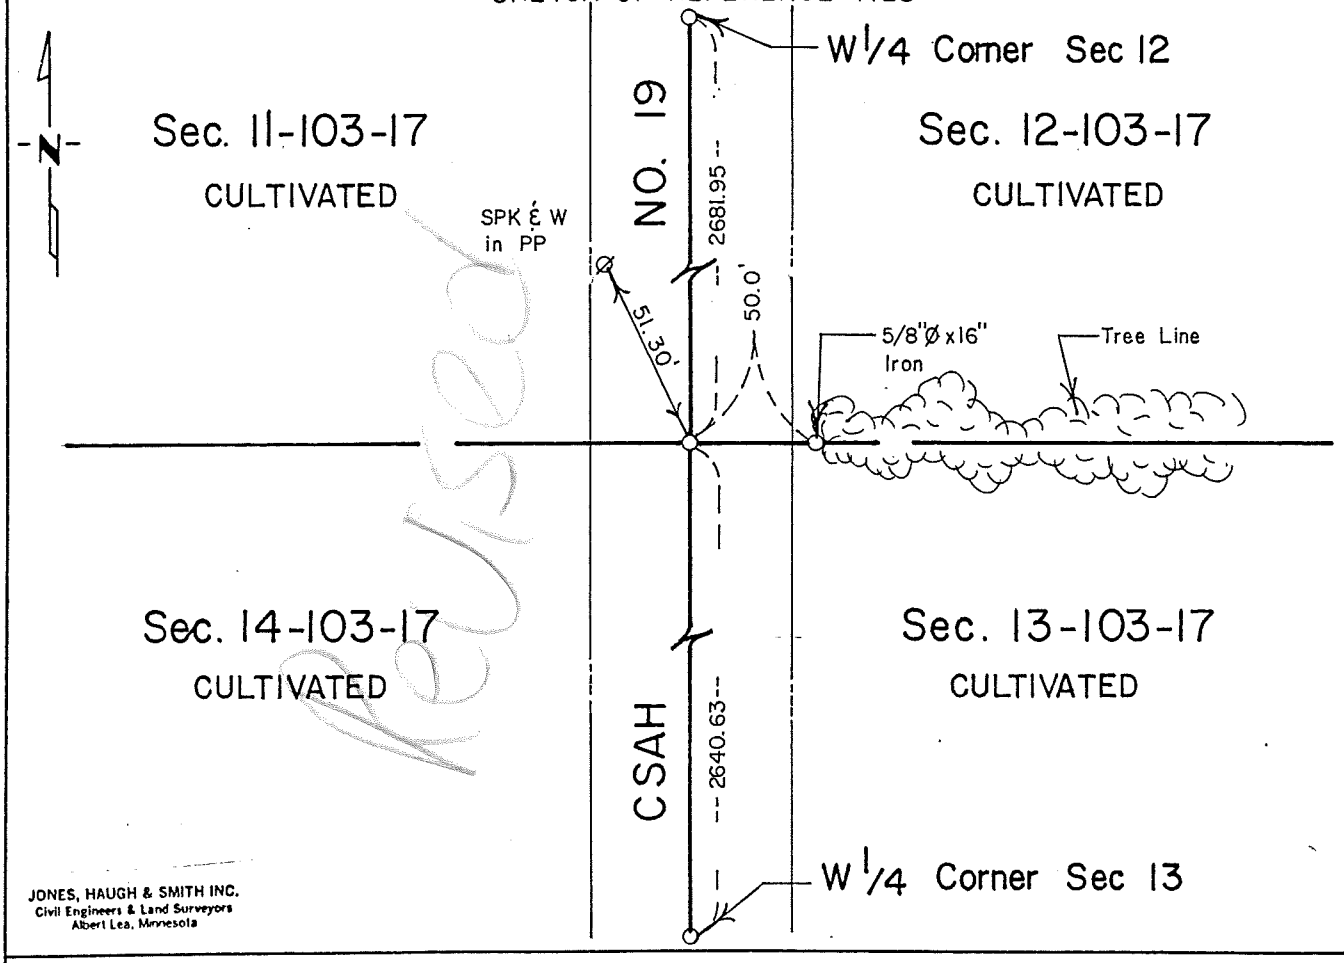

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter x 24" long iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the NW 1/4 of Section 13-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter x 24" iron and took ties. Information was recorded in Book "A" in the office of the County Engineer. No certificate of location was filed.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, RLS 13807, dug with the Mower County backhoe and uncovered a 5/8" diameter x 24" long iron 1.0 feet below the surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Set a cast iron monument at the location of 5/8" diameter iron.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 5/8"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

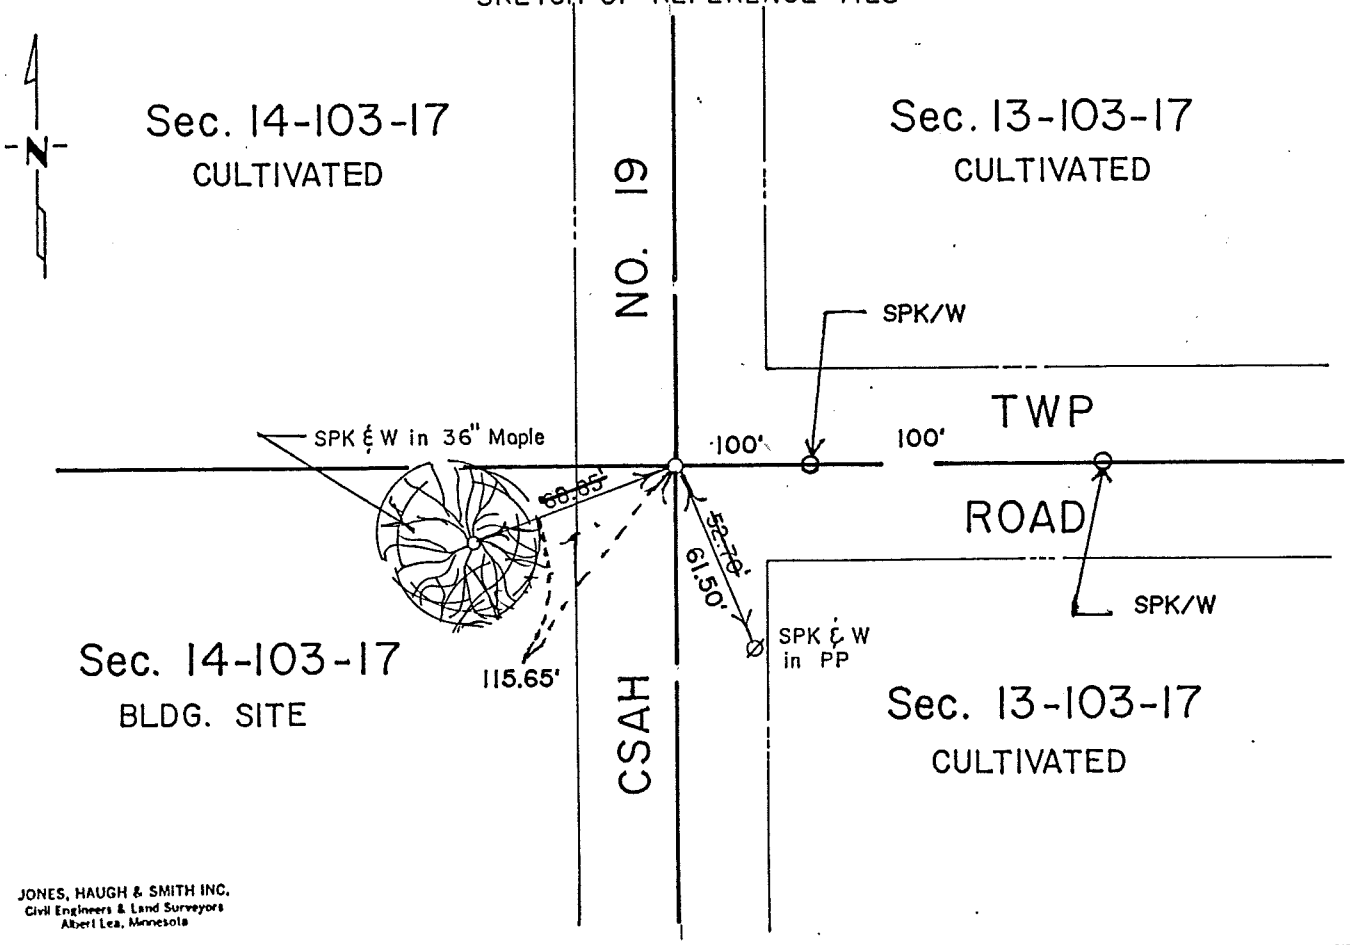

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" 0.2' below the road surface.

1980 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the SW 1/4 Section 14-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter 0.3 feet below the road surface. The monument was accepted and ties were taken.

1991 Jones, Haugh & Smith crew dug with the County backhoe and uncovered a 5/8" diameter x 24" iron 0.5 feet deep. Continued digging an 8' x 8' x 6' deep hole and found no further evidence. Assumed any perpetuation of original public land survey corner would have been destroyed by Tucker excavation in 1986. Accepted the 5/8" diameter iron as the best evidence and set cast iron monument.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set (road surface)

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 13, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 5/8"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

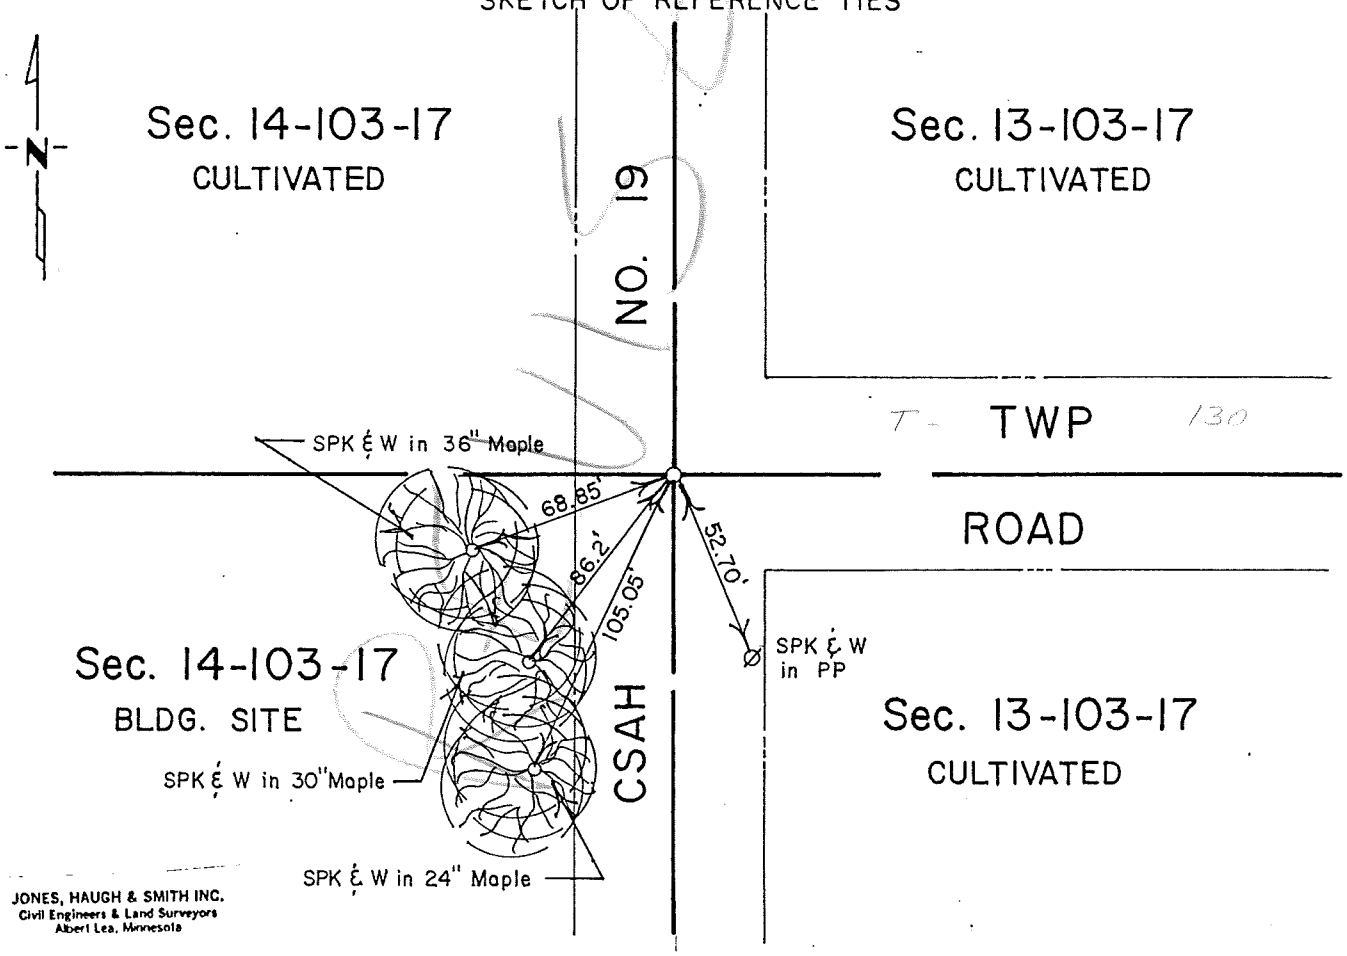

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13607

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 13-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1968 Jones & Haugh Inc crew uncovered a 5/8" diameter iron 0.2 feet below the road surface and ties were taken.

1979 Jones, Haugh & Smith Inc crew uncovered a 5/8" 0.2' below the road surface.

1980 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron during a survey in the SW 1/4 Section 14-103-17.

1986 Ray Tucker, RLS 15471, dug with the County backhoe and uncovered a 5/8" diameter 0.3 feet below the road surface. The monument was accepted and ties were taken.

1991 Jones, Haugh & Smith crew dug with the County backhoe and uncovered a 5/8" diameter x 24" iron 0.5 feet deep. Continued digging an 8' x 8' x 6' deep hole and found no further evidence. Assumed any perpetuation of original public land survey corner would have been destroyed by Tucker excavation in 1986. Accepted the 5/8" diameter iron as the best evidence and set cast iron monument.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-30-90 (DATE) found a 3"Ø charred wood post over a pointed field stone 3.0' deep in virgin soil on ℄ of N-S road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-30-90 (DATE) placed a 5/8"Ø iron on North side of stone a capped (13807) iron 5/8"Ø over stone.

SKETCH OF REFERENCE TIES

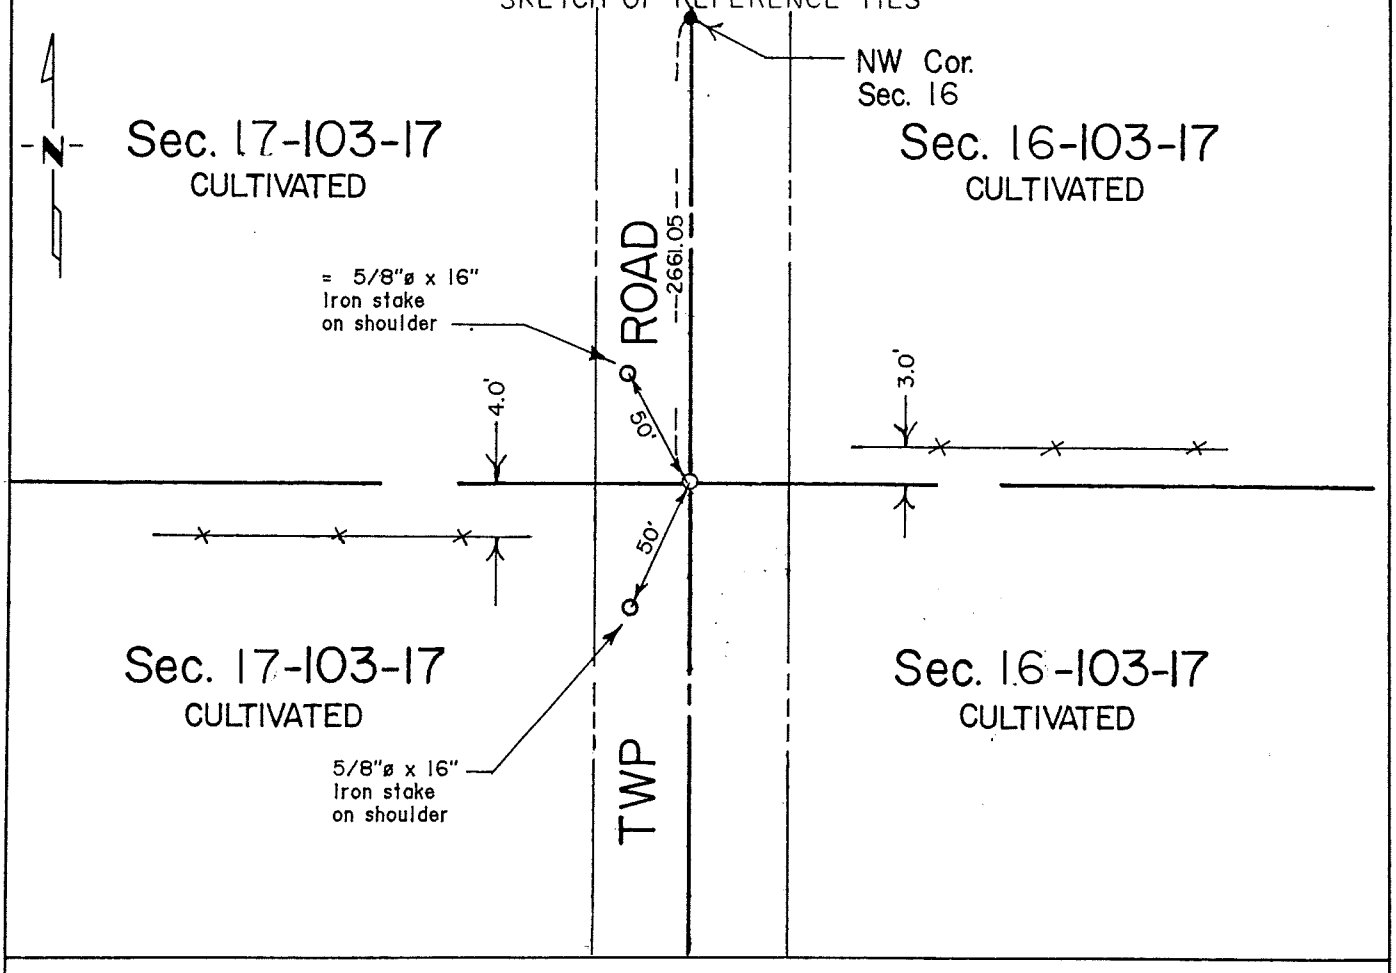

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-12-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew dug a hole 4'x20'x4' deep with a backhoe on centerline of north-south road and uncovered a 3" diameter charred wood post over a pointed field stone 3.0' deep in virgin soil. Placed a 5/8" diameter iron on north side of stone and a capped (13807) iron over stone at road surface.

Corner found fits past government notes and road centerline and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

TIE BOOK P 108 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 16, Township 103, Range 17, _____ P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On ~~Nov. 20, 1978~~ (DATE) placed a Chiselled "X" in concrete

SKETCH OF REFERENCE TIES

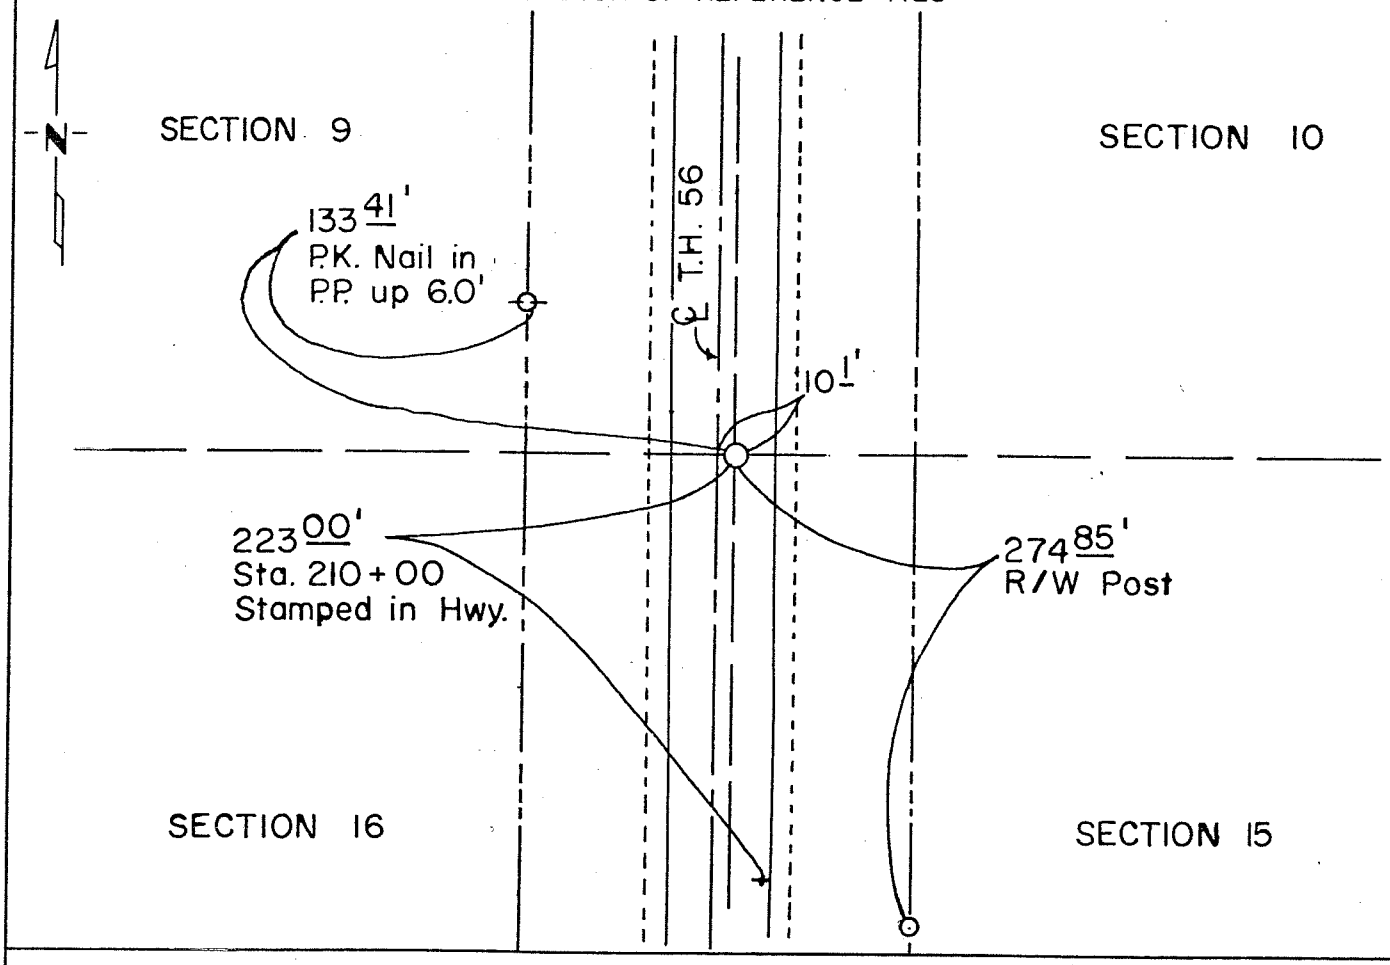

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald A. Olson (SIGNATURE) 3-13-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the Recorder's office at 3:00 P.M. on the 13th day of March A.D., 19 80

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 343776

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER SECTION 16, TOWNSHIP 103 NORTH, RANGE 17 W, 5th P.M.

1854 William Anderson, Deputy Surveyor, set the corner in the original Public Land Survey.

1937 Minnesota Department of Transportation graded T.H. 56 through this area. No evidence of the corner was found.

1973 Minnesota Department of Transportation constructed a concrete pavement over the corner. A search was made but no evidence of the corner was found.

1978 Zenk Engineering, Inc. made an electronic survey and search of the area around this corner, with a magnetic locator, and no evidence of any metal monument at this location. Excavation was not made through the concrete highway.

An analysis of the record data gives no indication of monument perpetuation for over 40 years. The corner was restored by obliterated methods. The corner was set by doubling the distance from the occupied N 1/4 corner of Section 15 over the occupied location of the N 1/16 corner of the NW 1/4 of Section 15 and by doubling the distance between the E 1/4 Corner of Section 16 and the occupied E 1/16 Corner of the NE 1/4 of Section 16. This location agreed with other occupation lines in Section 16 and is accepted as the corner of the original Public Land Survey.

For details of the analysis and electronic survey data, contact Zenk Engineering, Inc., Albert Lea, Minnesota 56007

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-11-90 (DATE) found a 5/8"Ø x 24" iron 8.0' South of ℄ E-W road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-11-90 (DATE) placed a cast iron monument over 5/8"Ø iron in line with fence N-S and 8.0' South of ℄ E-W roads.

SKETCH OF REFERENCE TIES

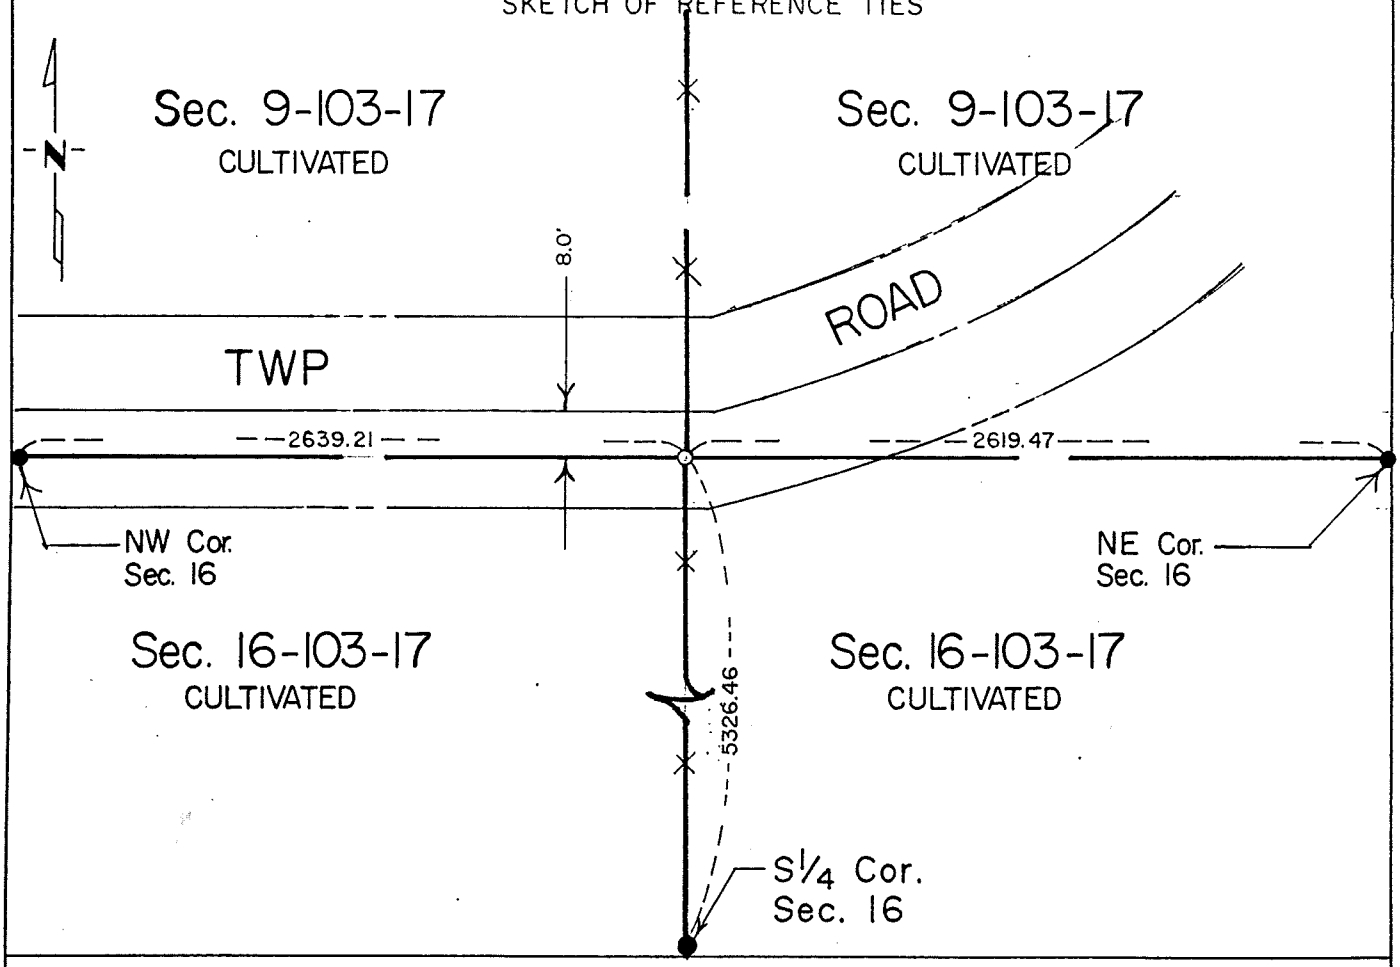

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-12-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and ties were taken:

16" Burr Oak	S 9° W	60 links (39.6 feet)
14" Burr Oak	N 616° E	5 links (3.30 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1970 Jones & Haugh crew dug with backhoe and found no evidence of public land survey corner. Set a 5/8" diameter iron in line with a fence north and south and in line with centerline of township road to west. Corner is 8.0 feet south of centerline of east-west road.

1990 Jones, Haugh & Smith crew found a 5/8" diameter x 24" iron 8.0' south of centerline east-west road in line with fences north-south. Placed a cast iron monument over 5/8" diameter iron at location of monument found.

Corner found fits occupation lines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 16, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-30-90 (DATE) found a 10"Ø CFP WITH REMAINS OF DOWNED FENCE RUNNING N-S-E-W IN A YOUNG WOODS.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-30-90 (DATE) placed a 5/8"Ø IRON CAPPED (13807) ON WEST SIDE OF CFP.

SKETCH OF REFERENCE TIES

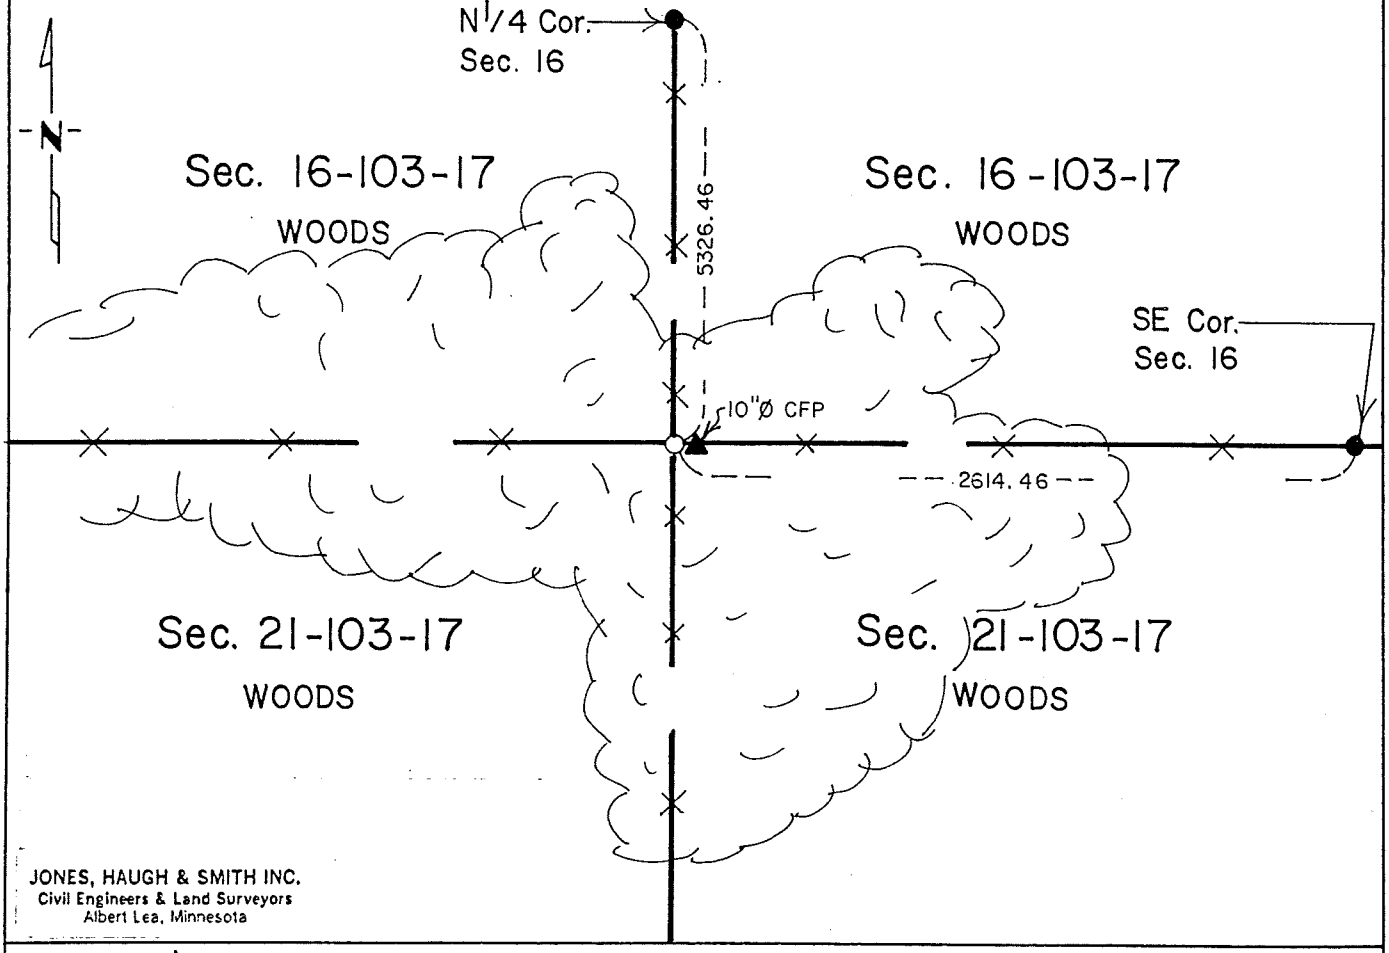

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-12-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and a trench and the following ties were taken:

8" Burr Oak	N 68° W	1025 links	(676.50 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew found a 10" diameter CFP with remains of downed fences running north-south-east-west in a woods. Placed a capped 5/8" diameter iron on west side of CFP.

Corner found fits occupation lines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

P 108 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E. 1/4 Corner of Section 16, Township 103, Range 17, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On Nov. 20, 1978 (DATE) placed a Chiselled "X" in concrete

SKETCH OF REFERENCE TIES

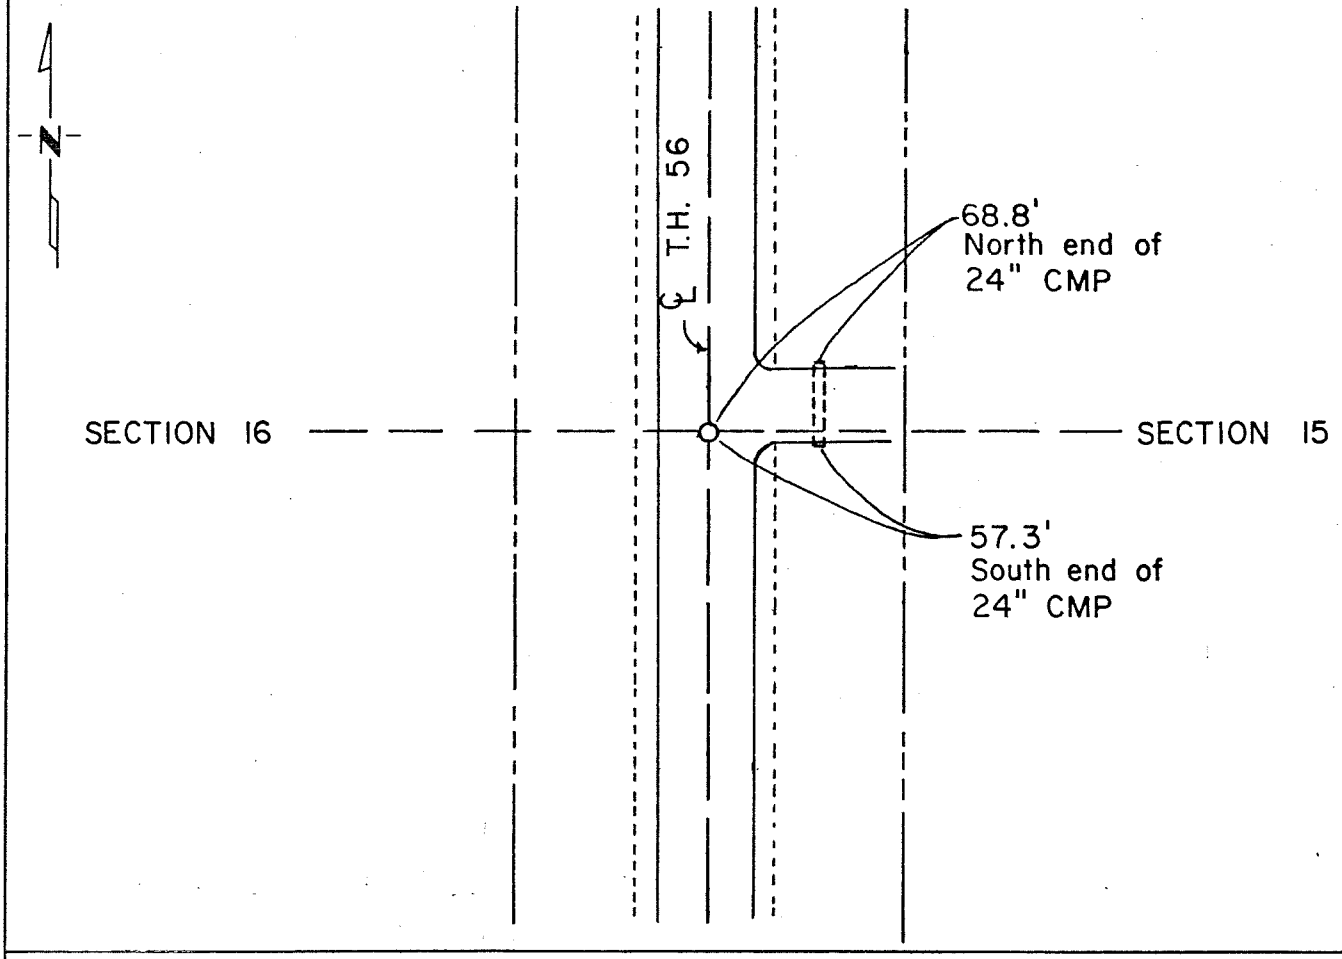

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson (SIGNATURE) 3-13-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the Recorder's office at 3:00 P.M. on the 13 day of March A.D., 1980

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 343775

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER SECTION 16, TOWNSHIP 103 NORTH, RANGE 17 WEST, 5 P.M.

1854 William Anderson, Deputy Surveyor, set the corner in the original Public Land Survey.

1937 Minnesota Department of Transportation graded T.H. 56 at the corner and no evidence of the corner was indicated.

1973 Minnesota Department of Transportation regraded and placed concrete pavement on T.H. 56. No evidence of the corner was found.

1978 Zenk Engineering searched the area at the location of corner indicated by electronic measurement with a magnetic locator and no evidence of the corner was found.

An analysis of the record data and electronic survey data gives no indication of monument perpetuation for over 40 years. The corner was set on the extension of the fence of the E-W 1/4 line in Section 16 on the centerline of T.H. 56. The occupation lines in Section 15 & 16 agree with this location.

For details of the analysis and electronic survey data contact Zenk Engineering, Inc., Albert Lea, Minnesota 56007

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 16, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/29/1993 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/29/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

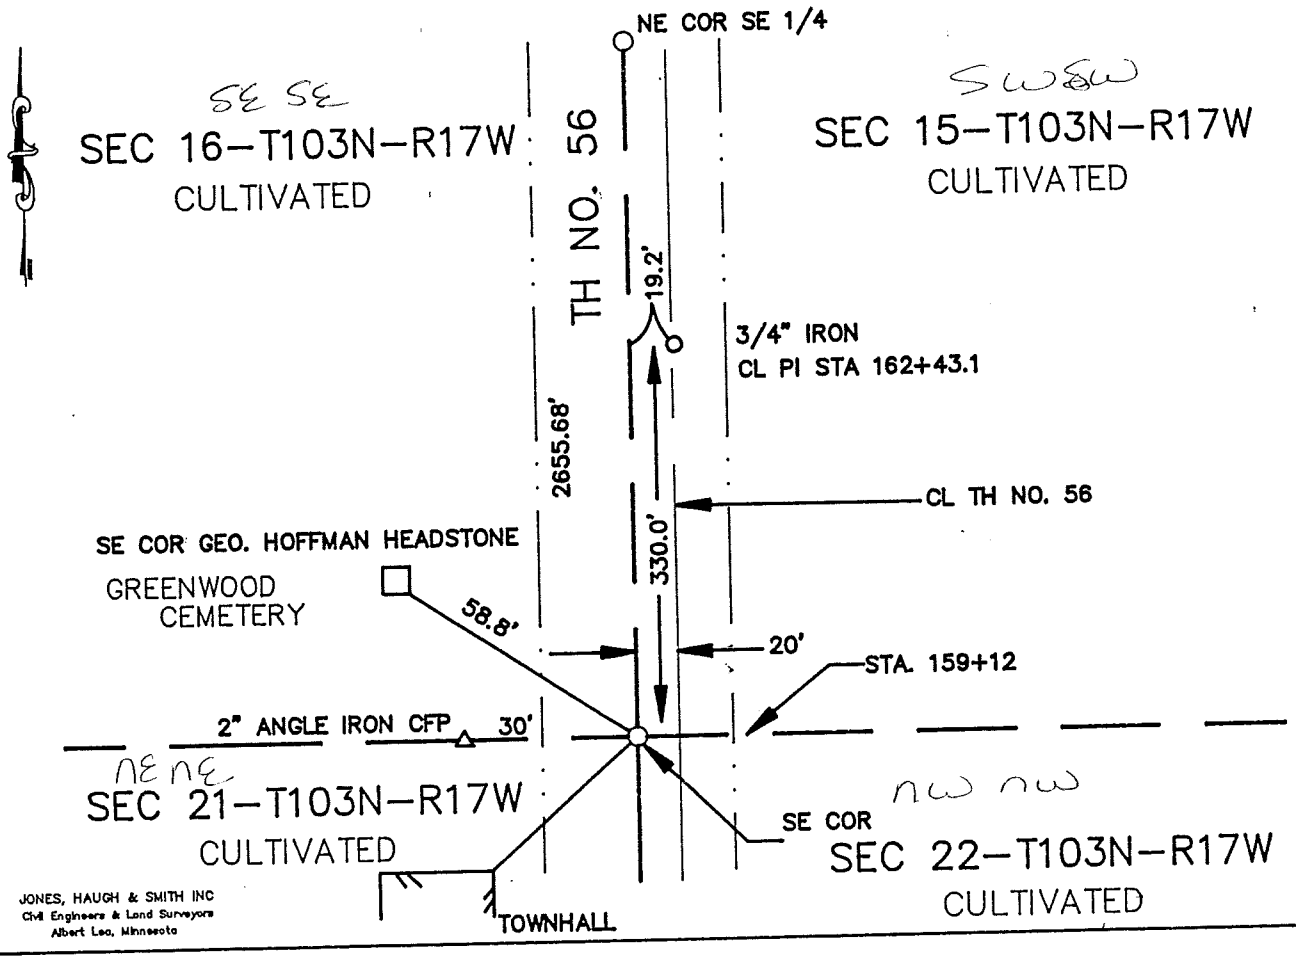

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 5 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447637

M.H.D. FORM NO. 2105 BOOK 92 PAGE 349

Book 92 Misc Page 349

SE Cor SEC 16-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

MN DOT TH 56 R/W plans shows a location for this corner.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a 3/4" iron 0.5" deep in bituminous. Monument has been accepted by MN DOT and area surveyor for 40 years. Position of corner was recommended by RLS Doug Town in November of 1968 as shown on TH # 56 R/W map. The 3/4" iron was removed and a cast iron monument was set.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/22/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/22/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

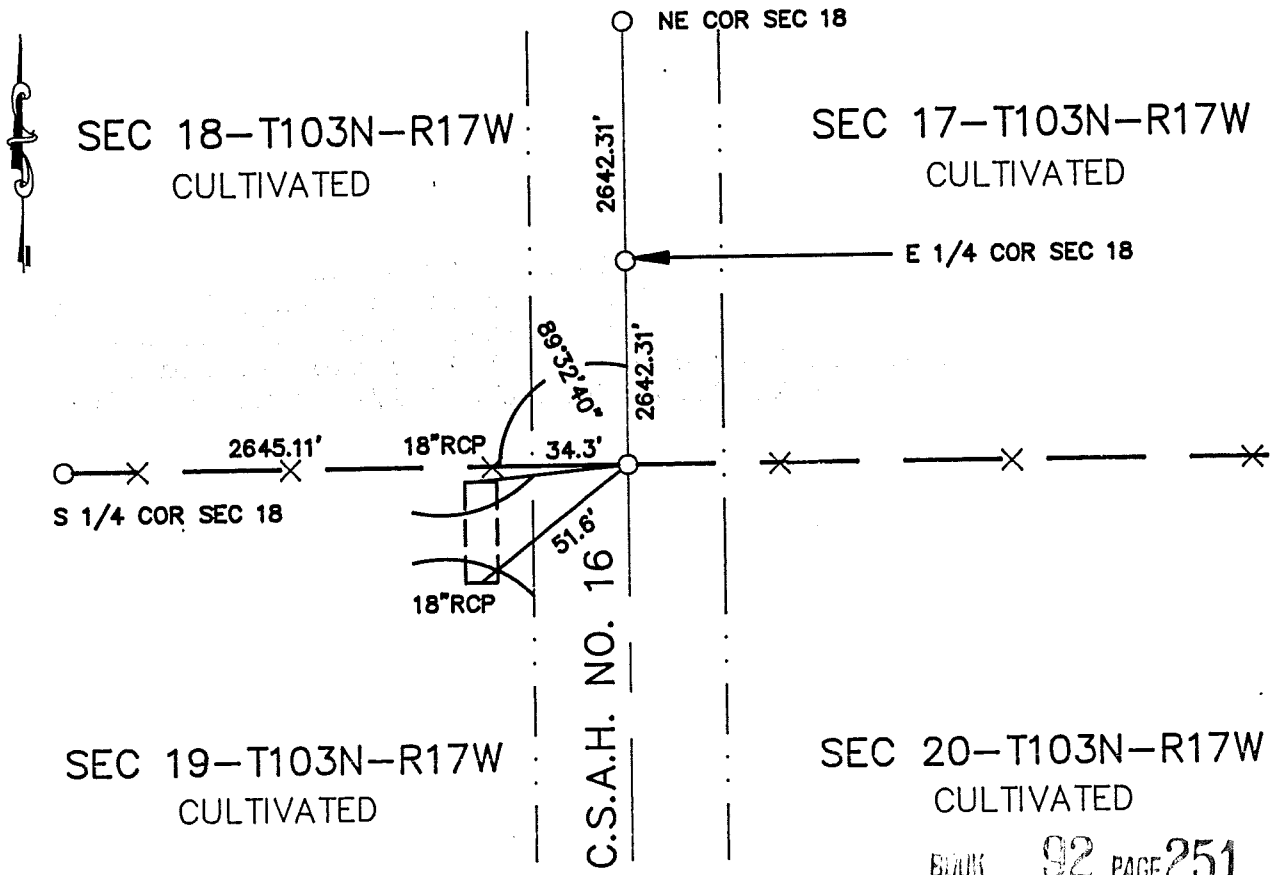

BOOK 92 PAGE 251

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447403

M.H.D. FORM NO. 2105

Book 92 Misc Pg 251

SE Cor SEC 18-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1954 Mower County Records state a stone at this corner was located and retied.

1987 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe and found a 6" clay tile over stone. Set 5/8" iron over monument found.

1995 Jones Haugh and Smith did not find monument set in 1987. Reset corner on straight line using NE corner section 18 and E 1/4 corner section 18. Set corner at a distance of 2642.31' south of E 1/4 corner in accordance with 1987 survey records.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/28/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/28/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

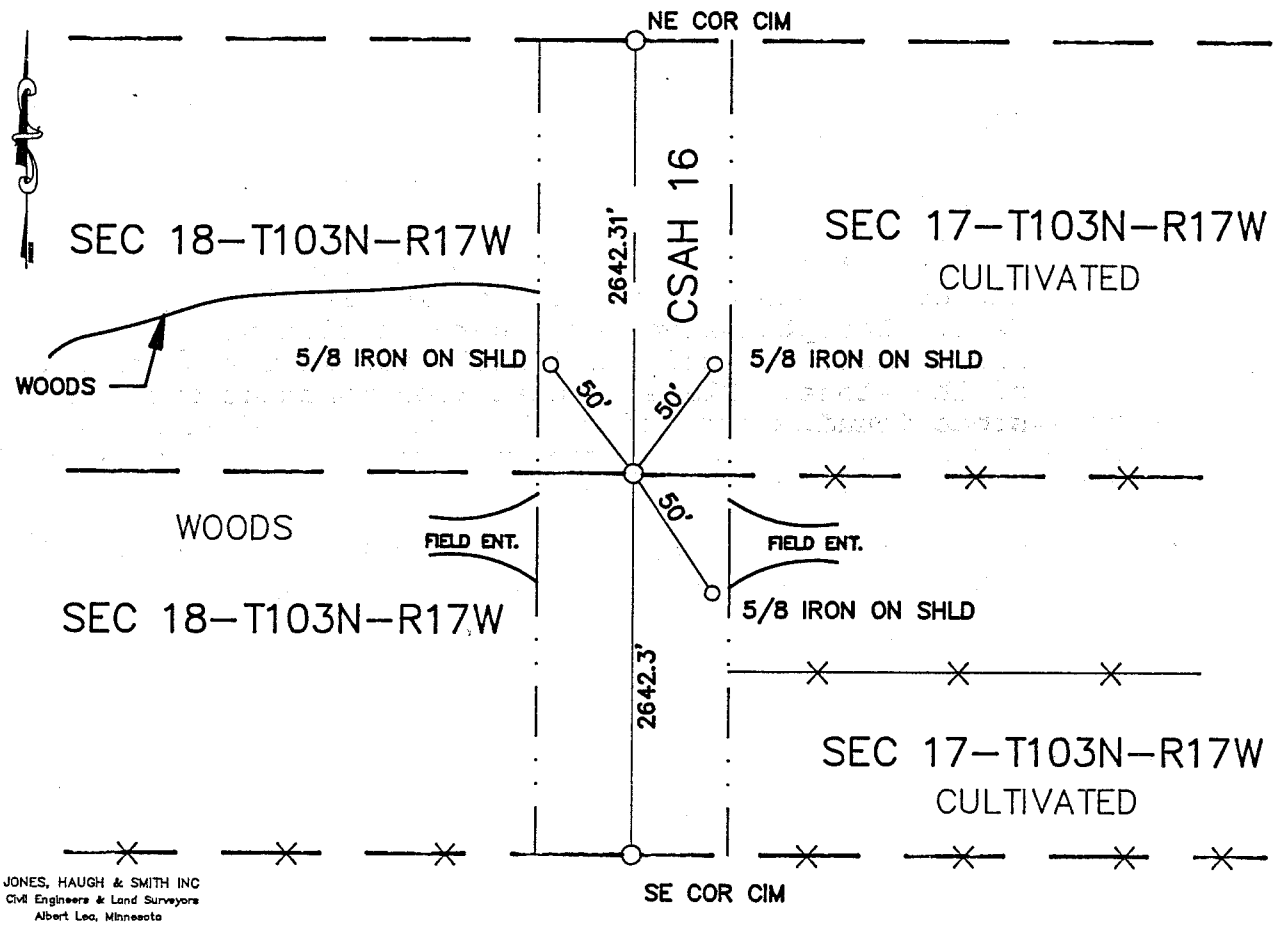

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-26-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p. M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 442200

M.H.D. FORM NO. 2105

BOOK 90 PAGE 105 Book 90 Misc Page 105

E 1/4 SEC 18-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 · Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL N-S road and in line with fence to the east. Excavated a 5.5' X 8' X 3.5' hole into virgin soil. No evidence was found of the corner. A CIM was placed on the split between the NE and SE section corners on the CL of the road and in line with the fence to the east.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 19, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/18/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/18/1996 (DATE) placed a 5/8" IRON CAPPED #13807

SKETCH OF REFERENCE TIES

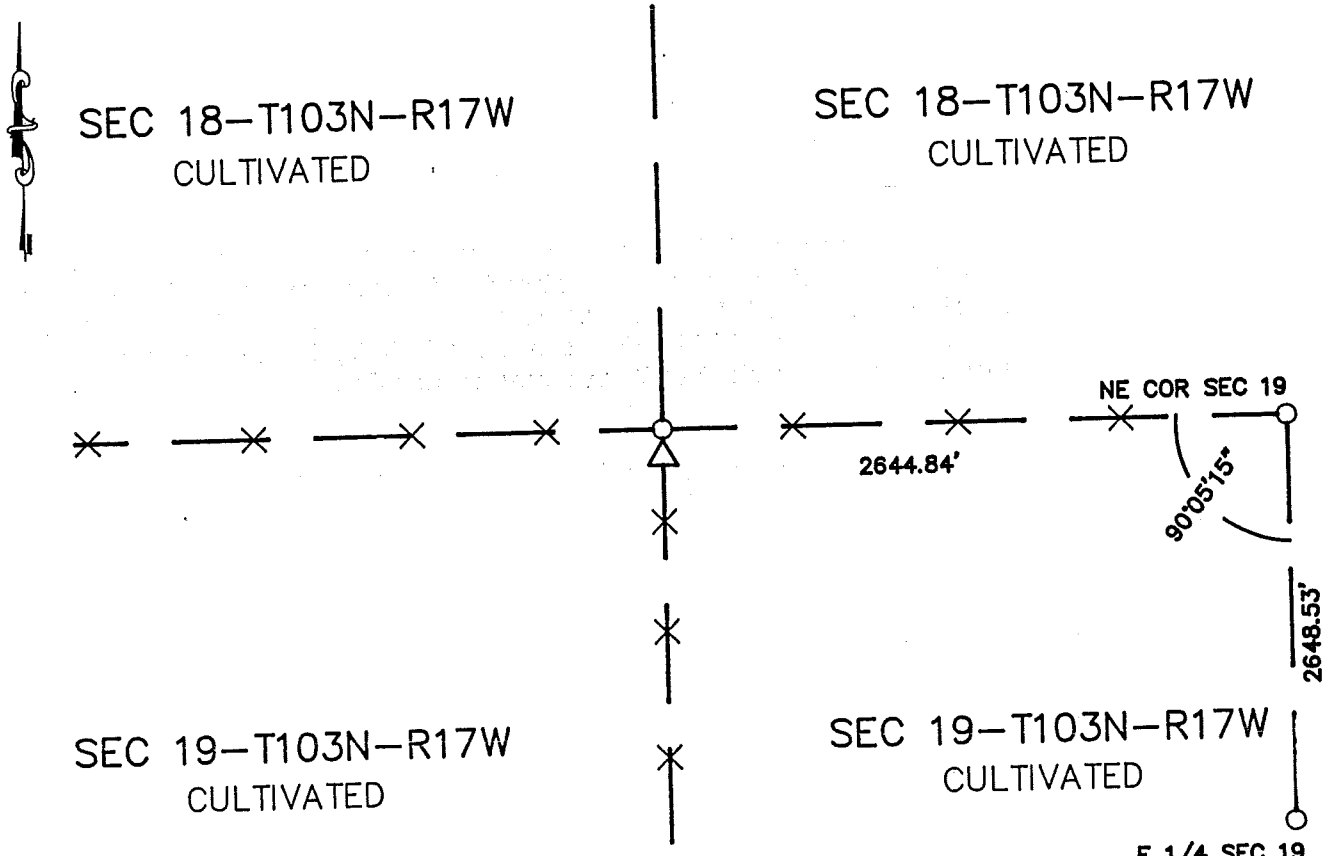

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 253

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 27 day of Aug A.D., 19 96

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447404

M.H.D. FORM NO. 2105

Book 92 Misc Pg 253

N 1/4 Cor SEC 19-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set 5/8" iron on north side of corner fence post in line with line fence east-west and in line with line fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

TIE BOOK P10

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 20, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 1-27-84 (DATE) found a concrete mon. with iron pin in center 1'± deep

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 1-27-84 (DATE) placed a cast iron monument over conc. marker

SKETCH OF REFERENCE TIES

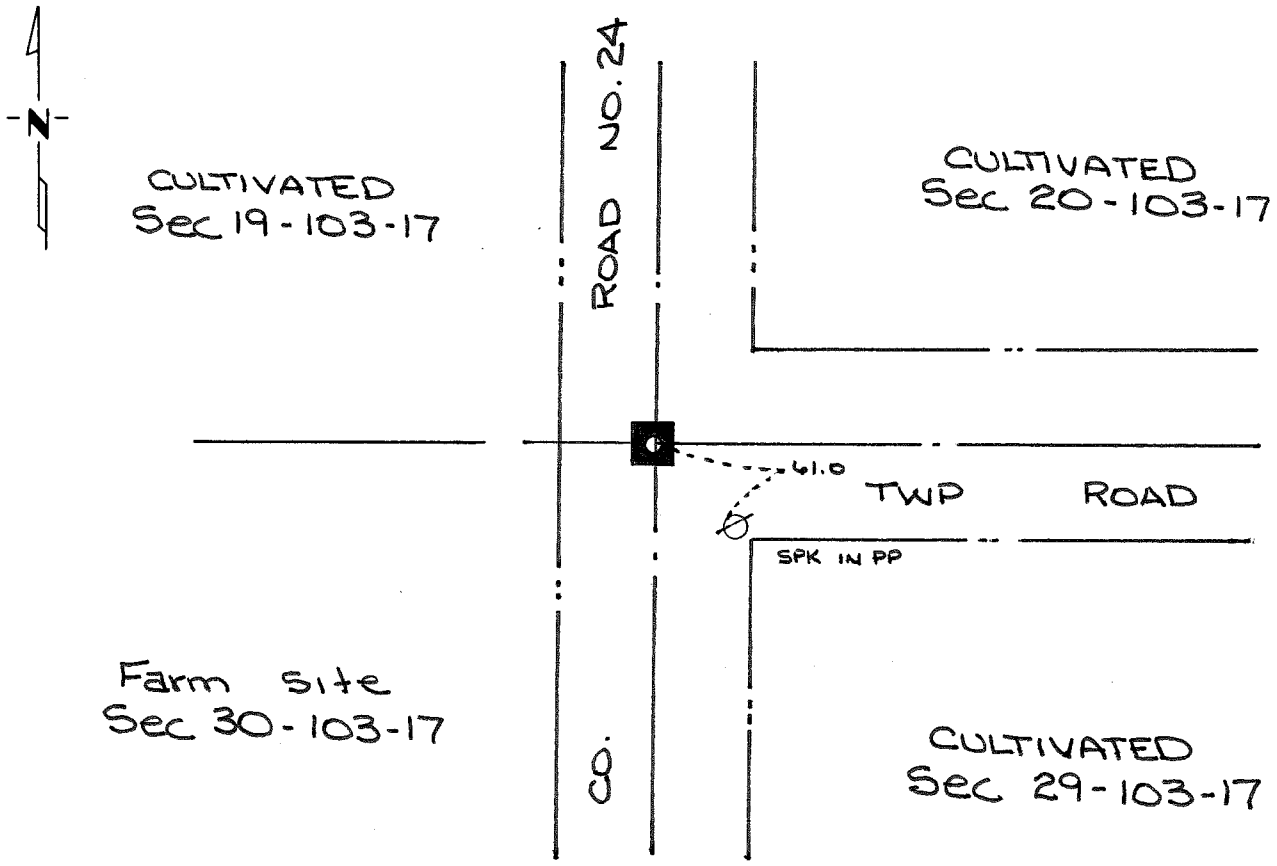

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 2-7-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 20-103-17

1856 Wm I. Anderson, Deputy Surveyor, set wood post during public land survey.

1954 Records from Mower County Engineer shows a concrete monument was found and ties were taken during a road survey.

1984 Jones, Haugh & Smith crew dug for section corner in bituminous surface road and at a depth of one foot more or less. Found a concrete monument with a iron pin cast in the center of the monument.

The monument found is in agreement with county records and fits occupation and road centerlines and is accepted as a perpetuation of the public land survey corner.

TIES BOOK P70 "A"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 20, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 1-27-84 (DATE) found a concrete mon. with iron pin in center 2'± deep

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 1-27-84 (DATE) placed a cast iron moument over conc. marker

SKETCH OF REFERENCE TIES

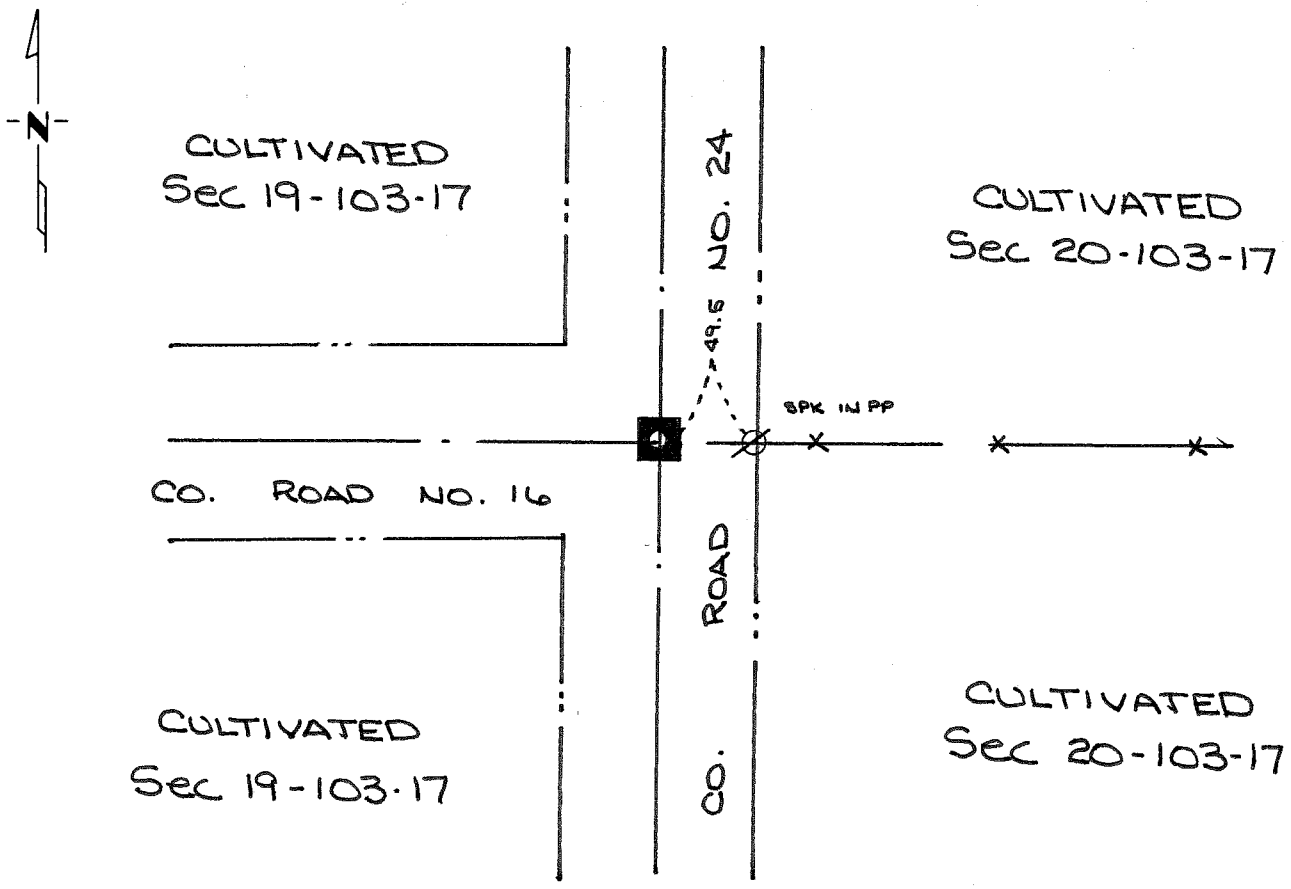

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

J. H. [illegible] 2-7-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$W\frac{1}{4}$ corner Section 20-103-17

1856 Wm I. Anderson, Deputy Surveyor, set wood post during public land survey.

1954 Records from Mower County Engineer shows a concrete monument was found and ties were set during road survey.

1984 Jones, Haugh & Smith crew dug for $\frac{1}{4}$ corner in bituminous surface road and at a depth of two feet more or less. Found a concrete monument with a iron pin cast in center of the monument.

The monument found is in agreement with Mower County records and fits occupation and road centerlines and is accepted as a perpetuation of the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/18/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/18/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

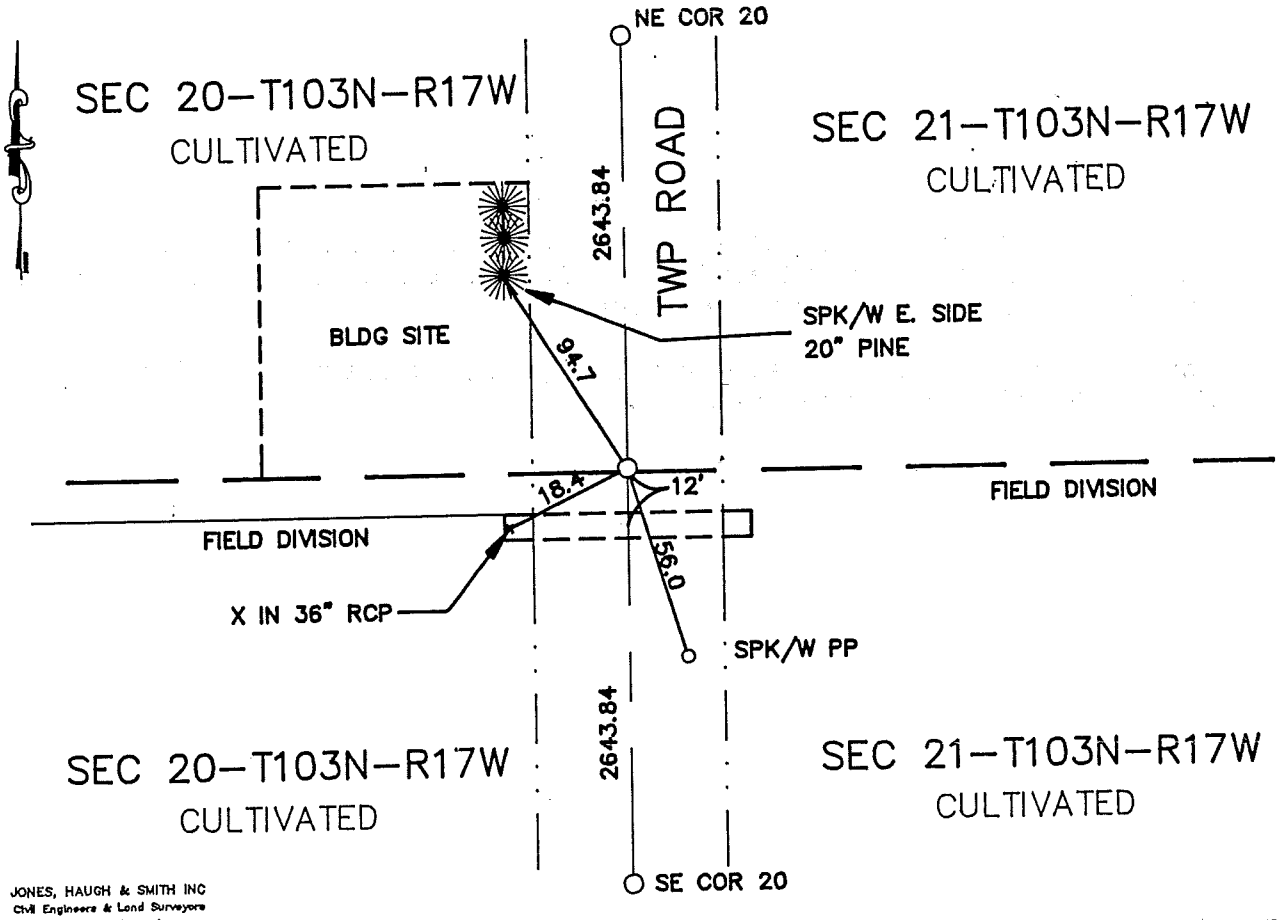

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 255

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447405

M.H.D. FORM NO. 2105

Book 92 Misc Pg 255

E 1/4 Cor SEC 20-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set corner of straight line between northeast and southeast at split. Corner fits centerline of north-south road in line with field division east. Original PLS corner would have been destroyed when 36" reinforced concrete pipe was installed.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 92 PAGE 256

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 20, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/07/1995 (DATE) found a 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

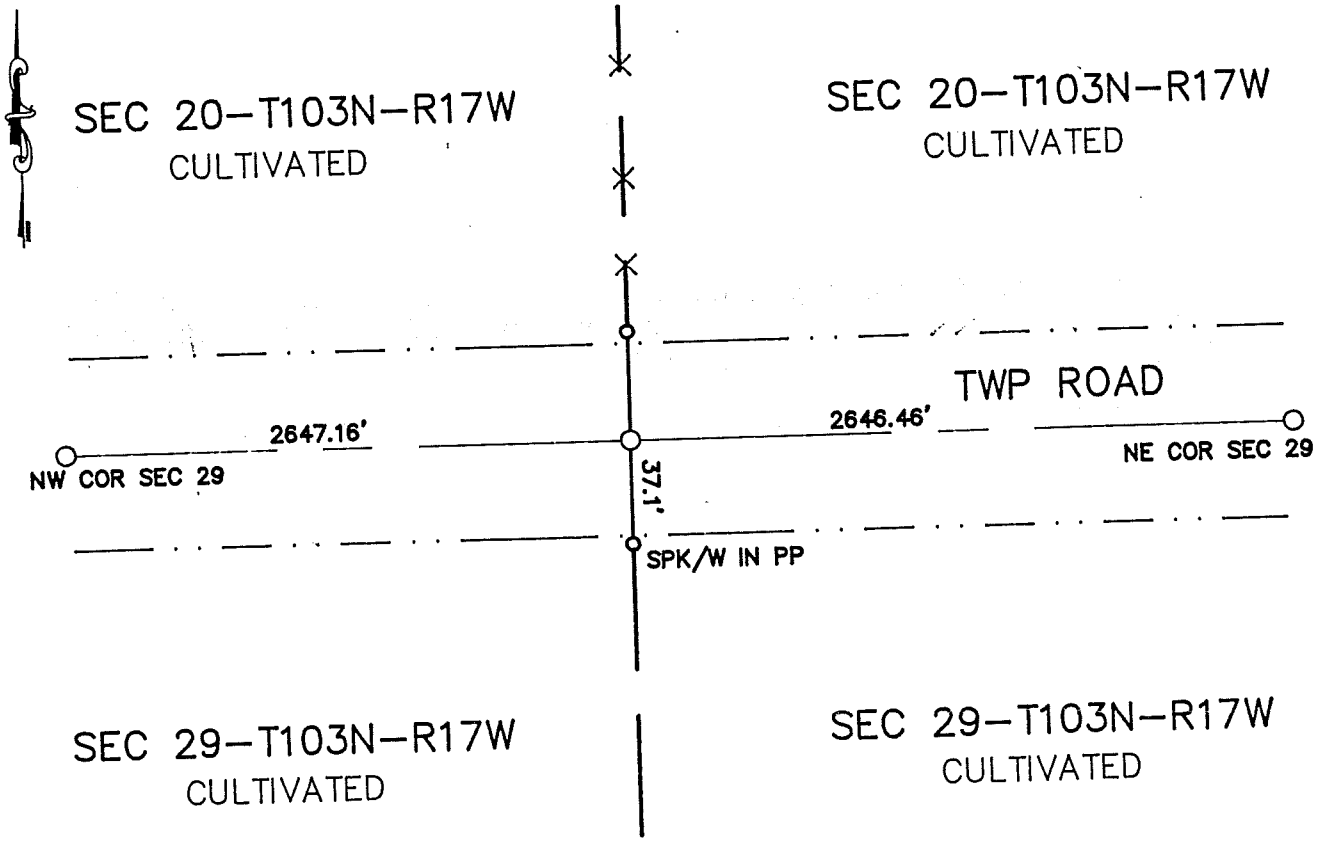

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 261

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 447408

M.H.D. FORM NO. 2105

Book 92 Misc Pg 261

S 1/4 Cor SEC 20-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1984 Jones Haugh and Smith crew dug but found no evidence of corner. Set RR spike at E-W road in line with fence North and pole line south.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of E-W township road. Uncovered 1/2 iron with plastic cap. Placed cast iron monument over the 1/2" iron which is in line with fence line north and on CL of township road E-W.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 20, Township 103 Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/18/1996 (DATE) found a 3" DIAMETER STEEL CFP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/18/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

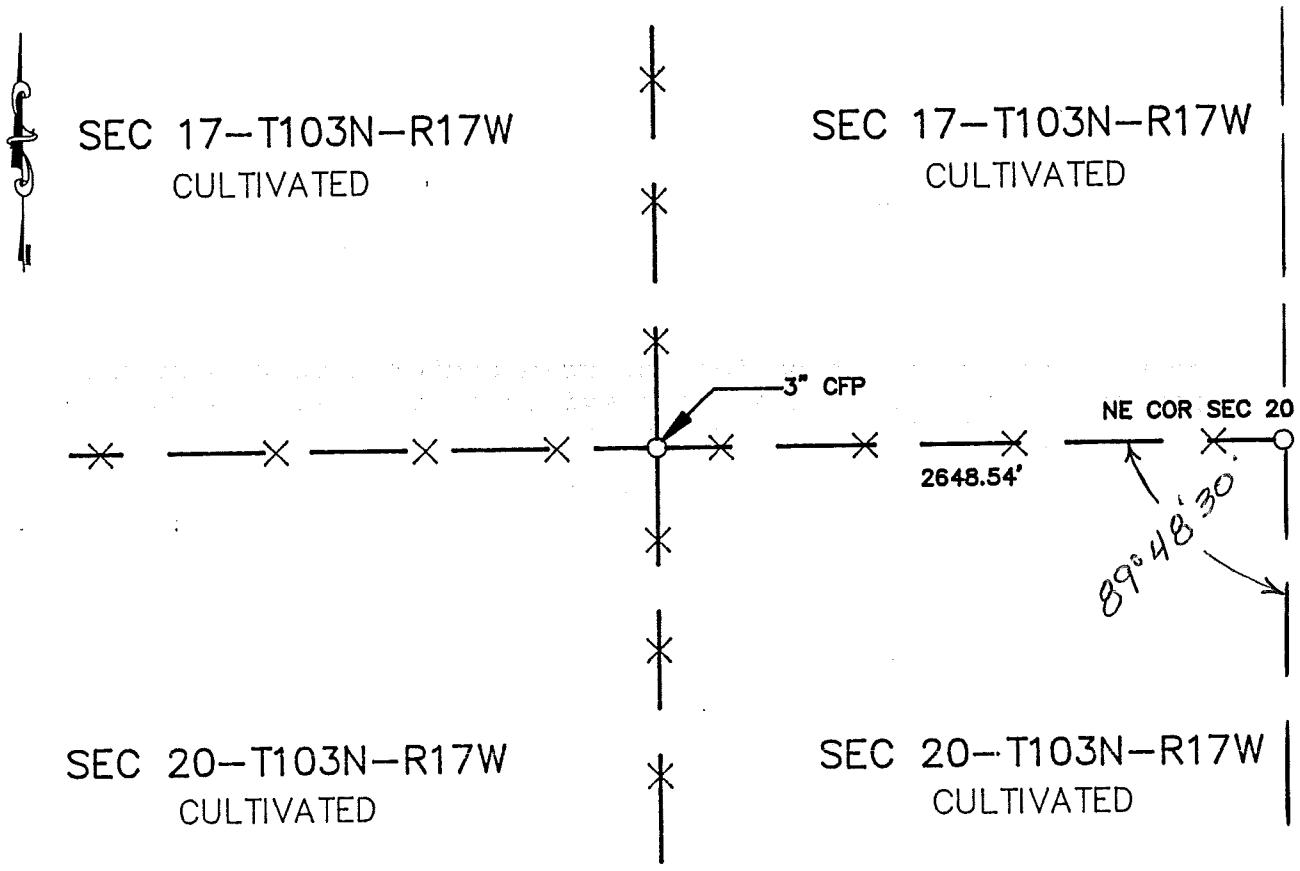

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 259

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 17 .M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447407

M.H.D. FORM NO. 2105

Book 92 Misc Pg 259

N 1/4 Cor SEC 20-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set 5/8" iron with cast iron monument on the west side of 3" steel corner post. Corner set in line with line fence north-south and line fence east-west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 20, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

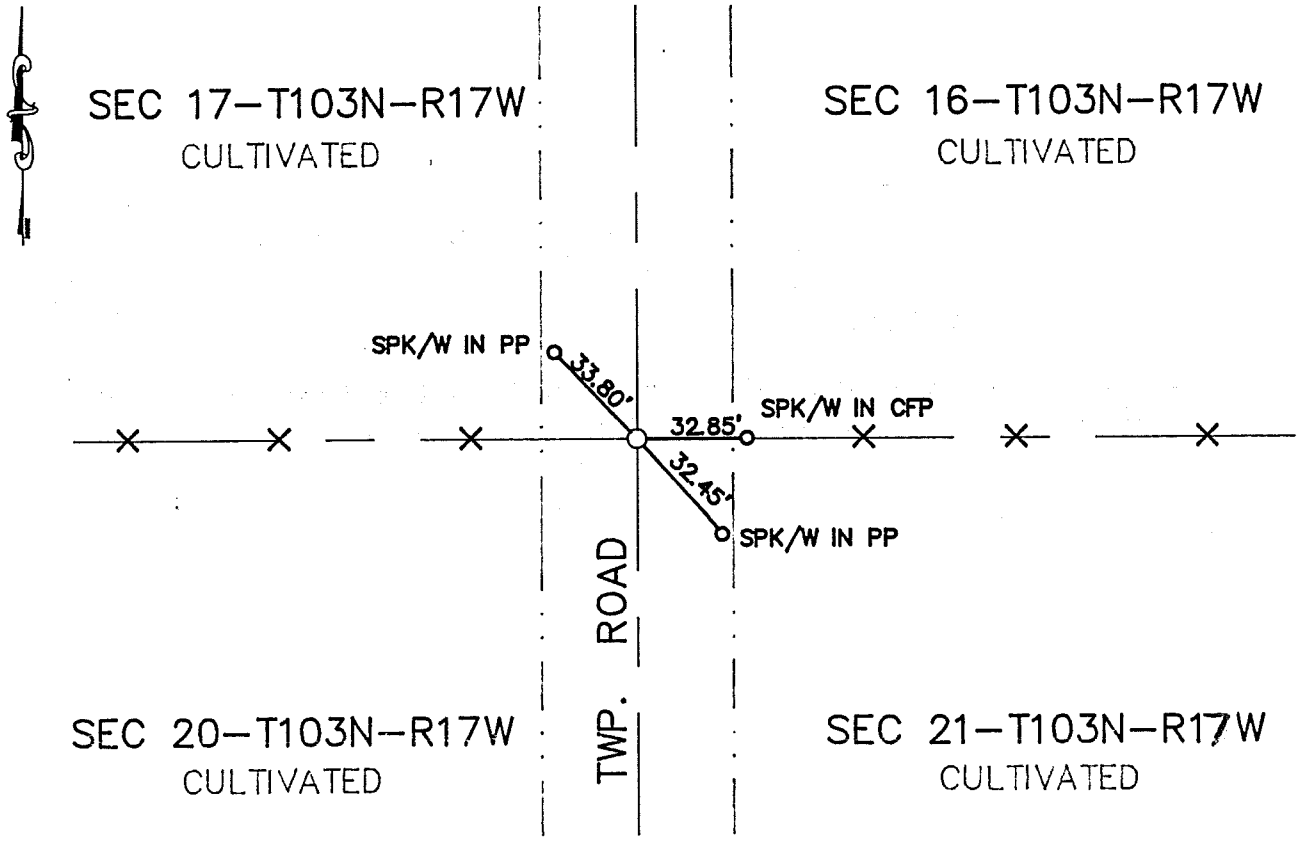

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 257

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-23-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 27 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 447106

M.H.D. FORM NO. 2105

Book 92 Misc Pg 257

NE Cor SEC 20-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence E-W. Uncovered no evidence of original PLS corner. Placed a cast iron monument in line with line fence E-W and on the CL of township road N-S.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 24, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 15" long iron 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

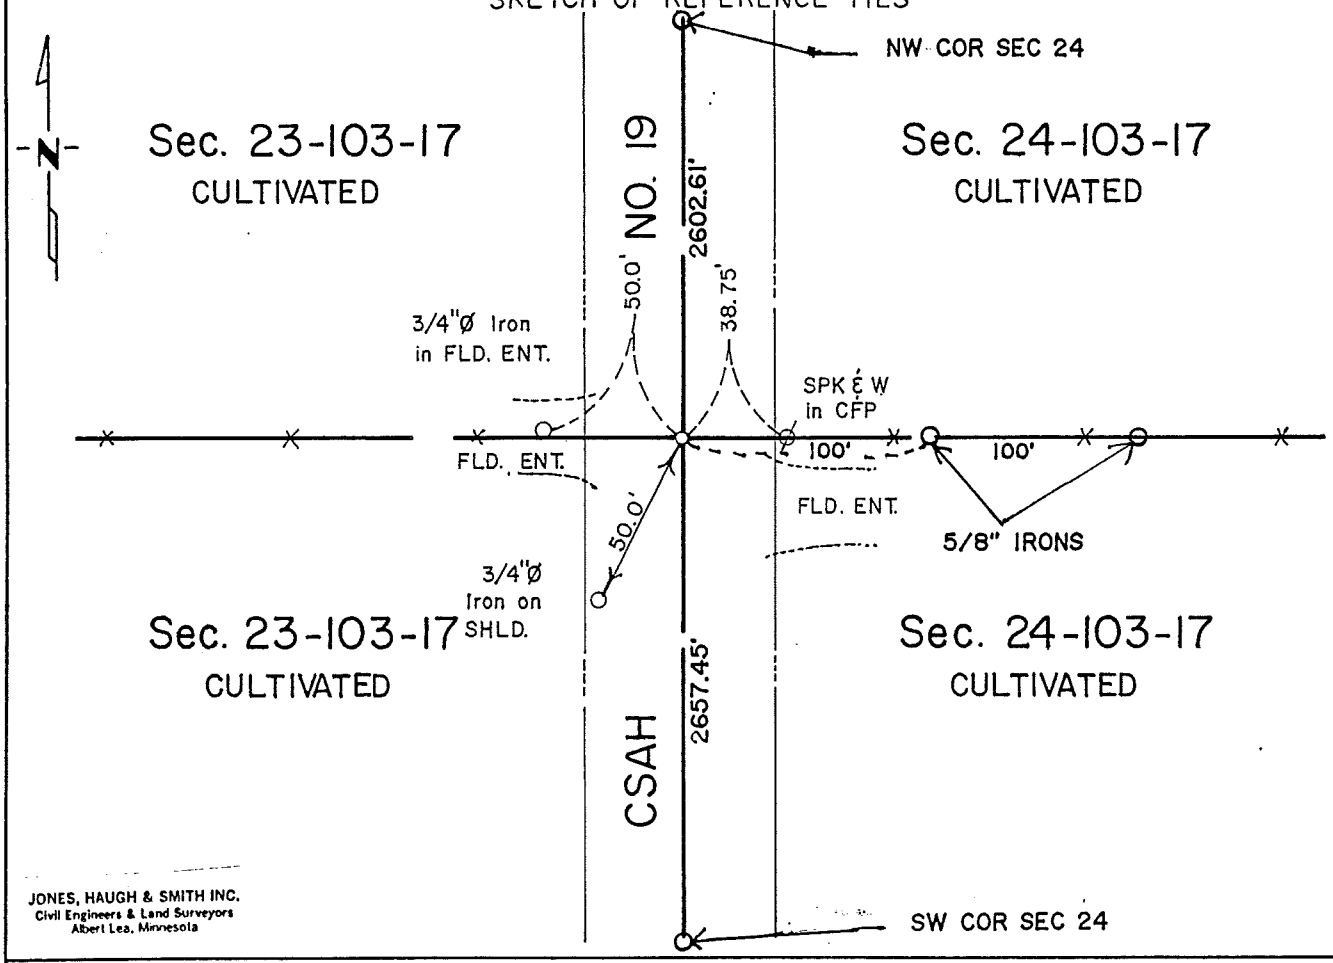

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 24-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte RLS 13807, dug with the County backhoe and uncovered a 3/4" diameter X 15" iron 0.5 feet below the road surface. Continued digging an 8' x 10' x 5' deep hole and found no further evidence of a public land survey corner or a perpetuation of. Set cast iron monument at the location of 3/4" diameter iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set (road surface)

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 24, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 15" long iron 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

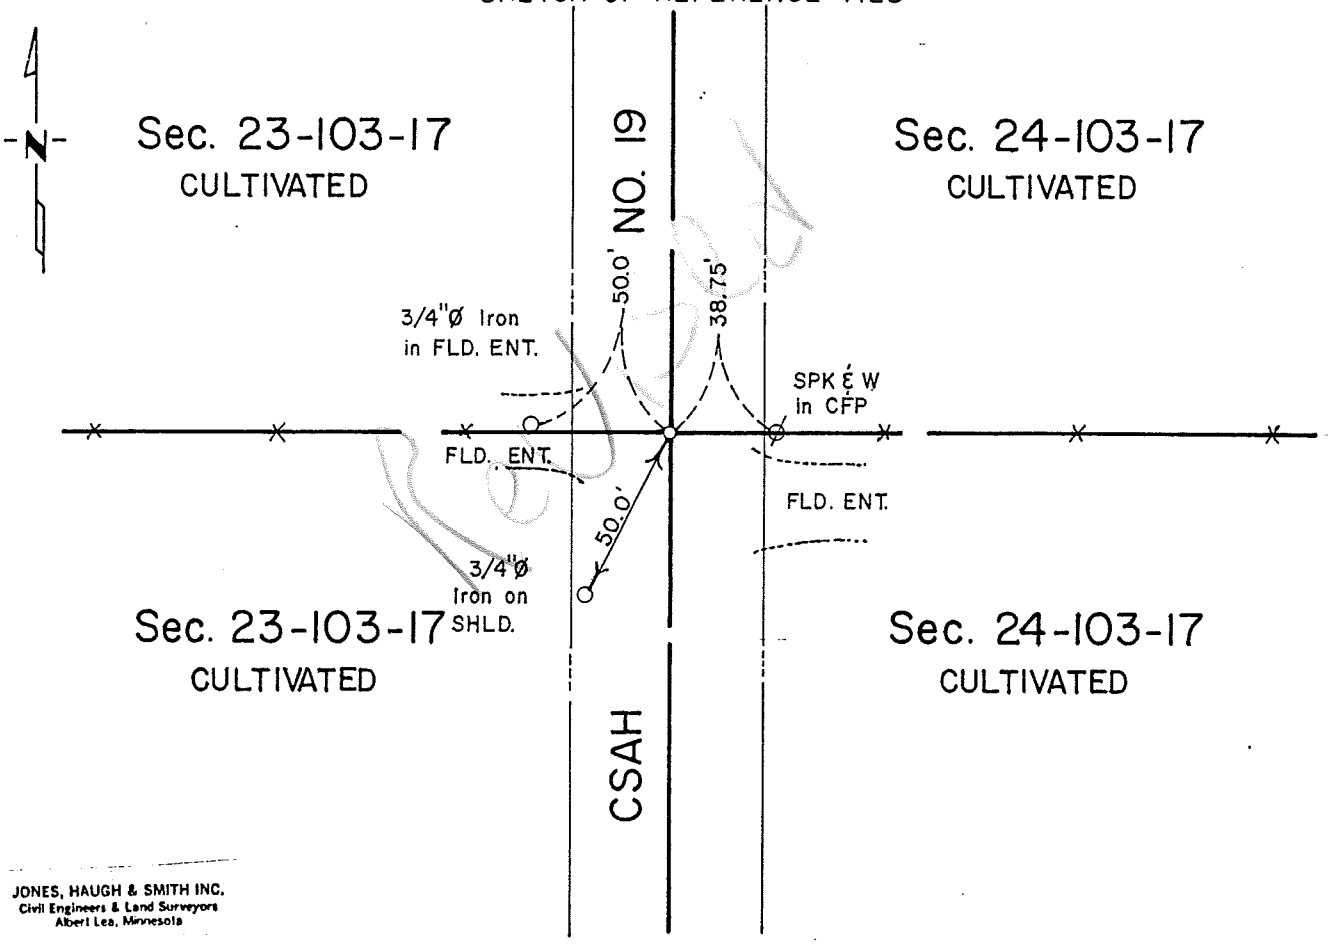

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 24-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte RLS 13807, dug with the County backhoe and uncovered a 3/4" diameter X 15" iron 0.5 feet below the road surface. Continued digging an 8' x 10' x 5' deep hole and found no further evidence of a public land survey corner or a perpetuation of. Set cast iron monument at the location of 3/4" diameter iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 24, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" long re-bar capped RLS 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

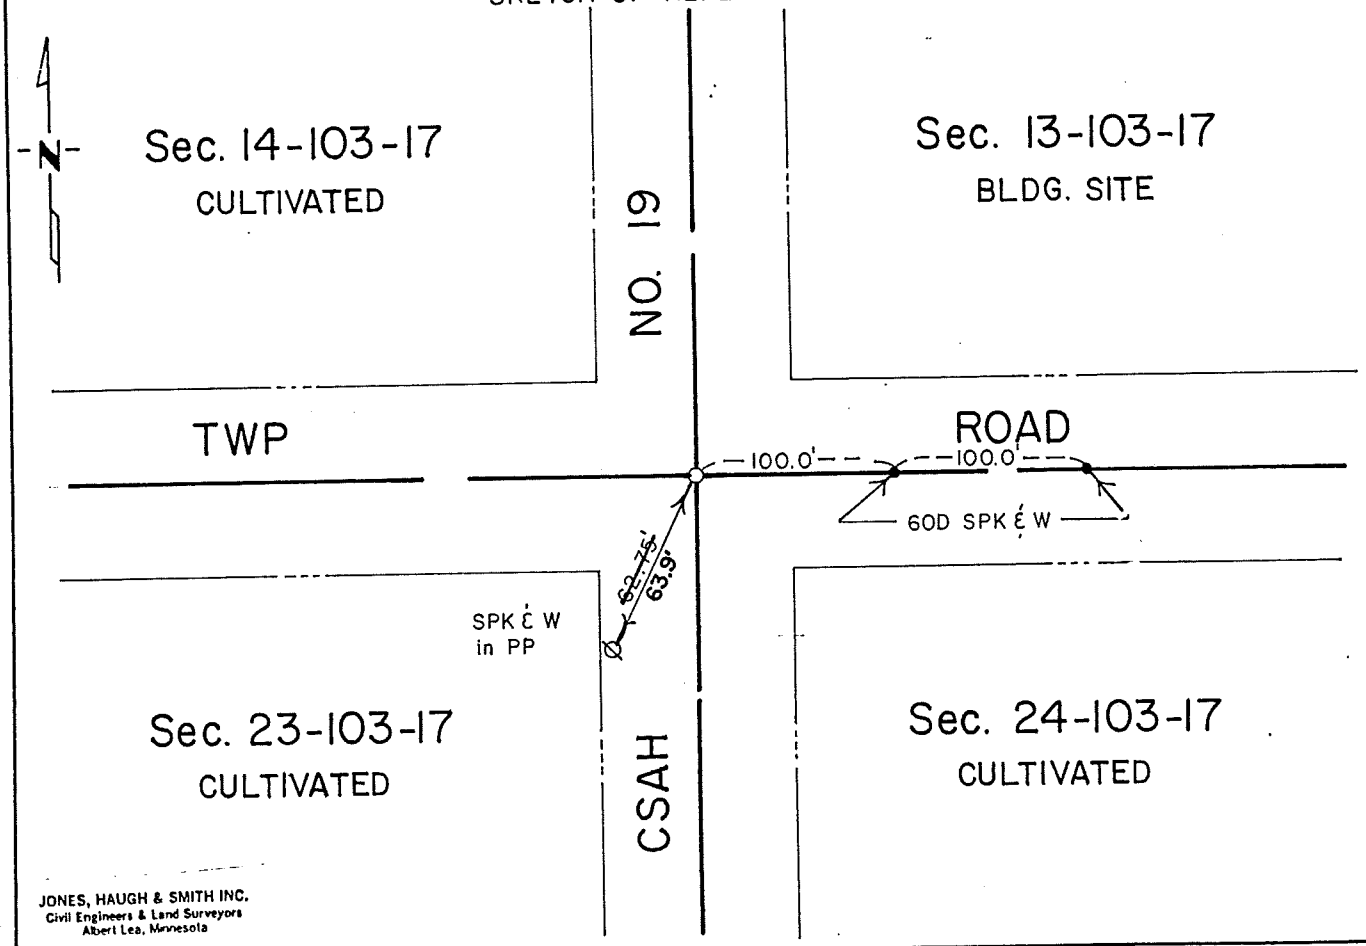

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 24-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1986 Ray Tucker, RLS 15471, recorded in Book "A" in the County Engineer's office that the corner was a 1/2" diameter re-bar with plastic cap RLS 15471 and the following ties were taken:

62.65	SW	Double headed nail in PP
57.18	SE	Nail in fence post
65.0	NE	Nail in fence post
80.0	SE	to 3/4" diameter iron
75.0	SW	to 3/4" diameter iron
80.0	NE	to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte RLS 13807, dug with the County backhoe for 1991 grading project SAP 50-619-15 and uncovered a 1/2" X 24" iron capped RLS 15471. Continued digging a 6' x 8' x 5' deep hole and found no further evidence of a public land survey corner or a perpetuation of. Statement from County Engineer and Employees indicate Ray Tucker excavated with the County backhoe for the corner, but no Certificate of Location was ever filed. If this being the case, any evidence was probably destroyed at that time. Accepted a 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 24, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Øx24" long re-bar capped RLS 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

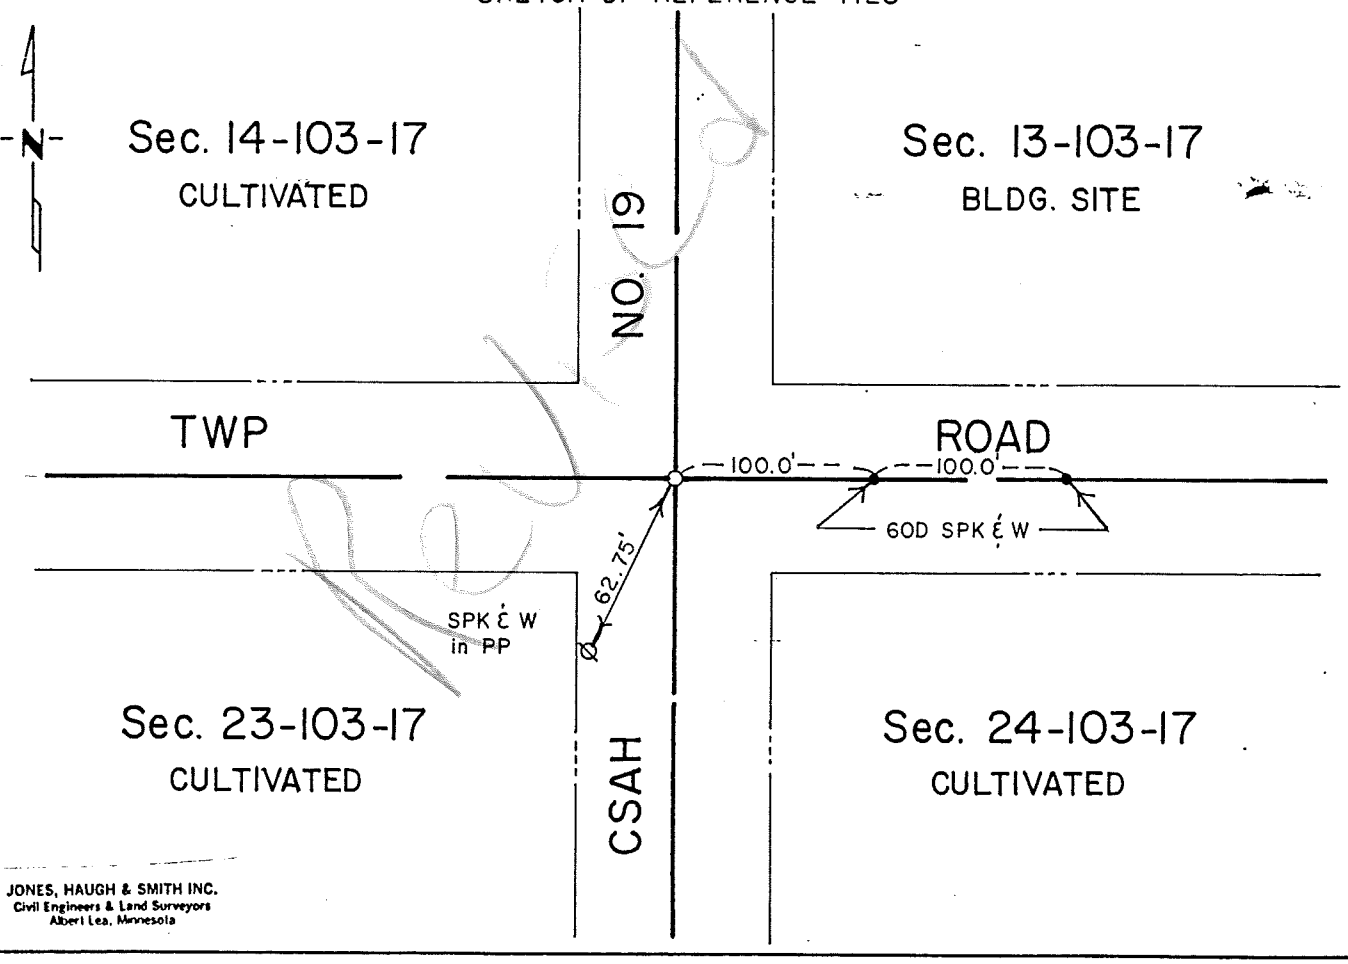

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 24-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1986 Ray Tucker, RLS 15471, recorded in Book "A" in the County Engineer's office that the corner was a 1/2" diameter re-bar with plastic cap RLS 15471 and the following ties were taken:

62.65	SW	Double headed nail in PP
57.18	SE	Nail in fence post
65.0	NE	Nail in fence post
80.0	SE	to 3/4" diameter iron
75.0	SW	to 3/4" diameter iron
80.0	NE	to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte RLS 13807, dug with the County backhoe for 1991 grading project SAP 50-619-15 and uncovered a 1/2" X 24" iron capped RLS 15471. Continued digging a 6' x 8' x 5' deep hole and found no further evidence of a public land survey corner or a perpetuation of. Statement from County Engineer and Employees indicate Ray Tucker excavated with the County backhoe for the corner, but no Certificate of Location was ever filed. If this being the case, any evidence was probably destroyed at that time. Accepted a 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 25, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a CAST IRON MONUMENT 4" DEEP

SKETCH OF REFERENCE TIES

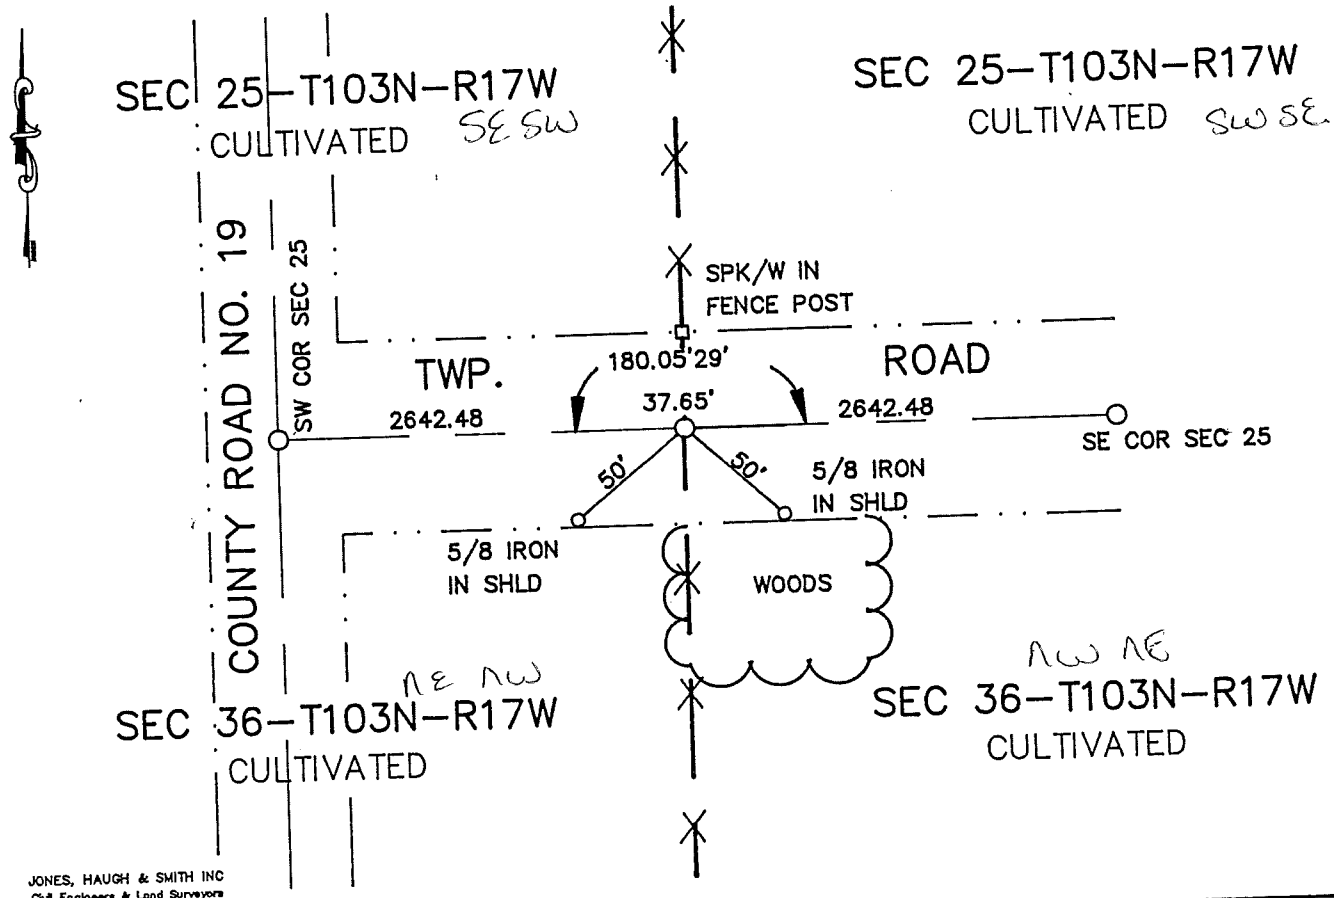

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 5 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447638

M.H.D. FORM NO. 2105 BOOK 92 PAGE 351 Book 92 Misc Page 351

S 1/4 Cor SEC 25-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on the CL of township road E-W and in line with line fences N-S. Uncovered no evidence of original PLS corner. Placed a cast iron monument on a straight line at the midpoint between the SW and the SE section corners. Corner fits occupation and road CLs.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 25, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

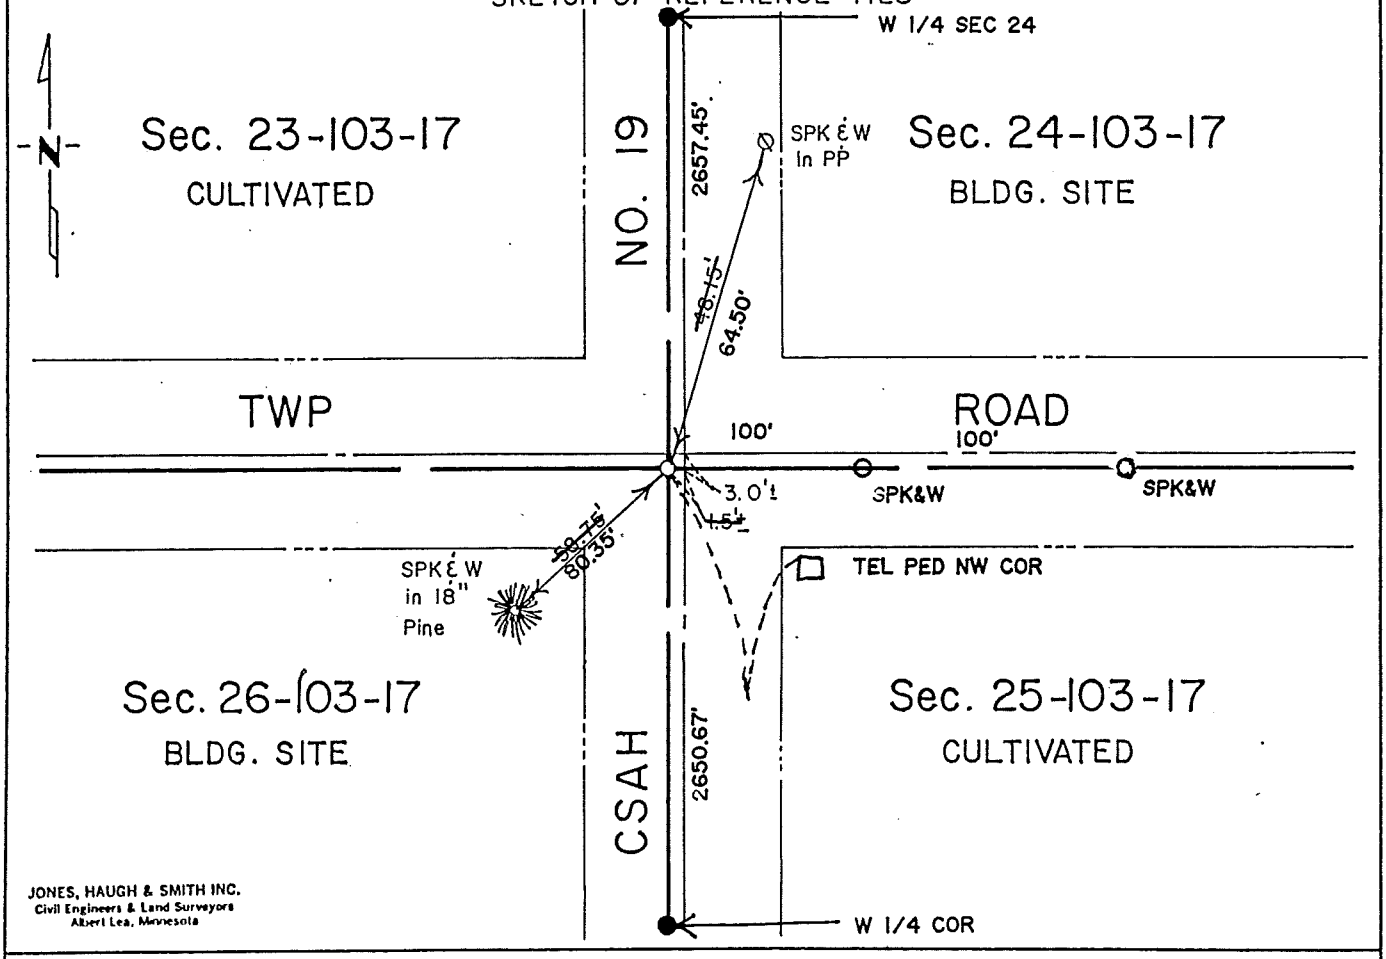

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 25-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1986 Ray Tucker, RLS 15471, placed a 1/2" diameter x 24" capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:

48.22	NE	to SPK PP
59.98	WSW	to SPK in 24" Pine
90.70	NE	to SPK in 2nd wood post east
73.60	WNW	to 3/4" iron
94.95	SW	to SPK in 24" Ash
60.41	NW	to 1/2" iron

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe for Grading Project SAP 50-619-15 and uncovered a 1/2" diameter x 24" re-bar 1" below road surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Therefore accepted 1/2" diameter iron set by Ray Tucker and placed a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 25, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" long re-bar

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

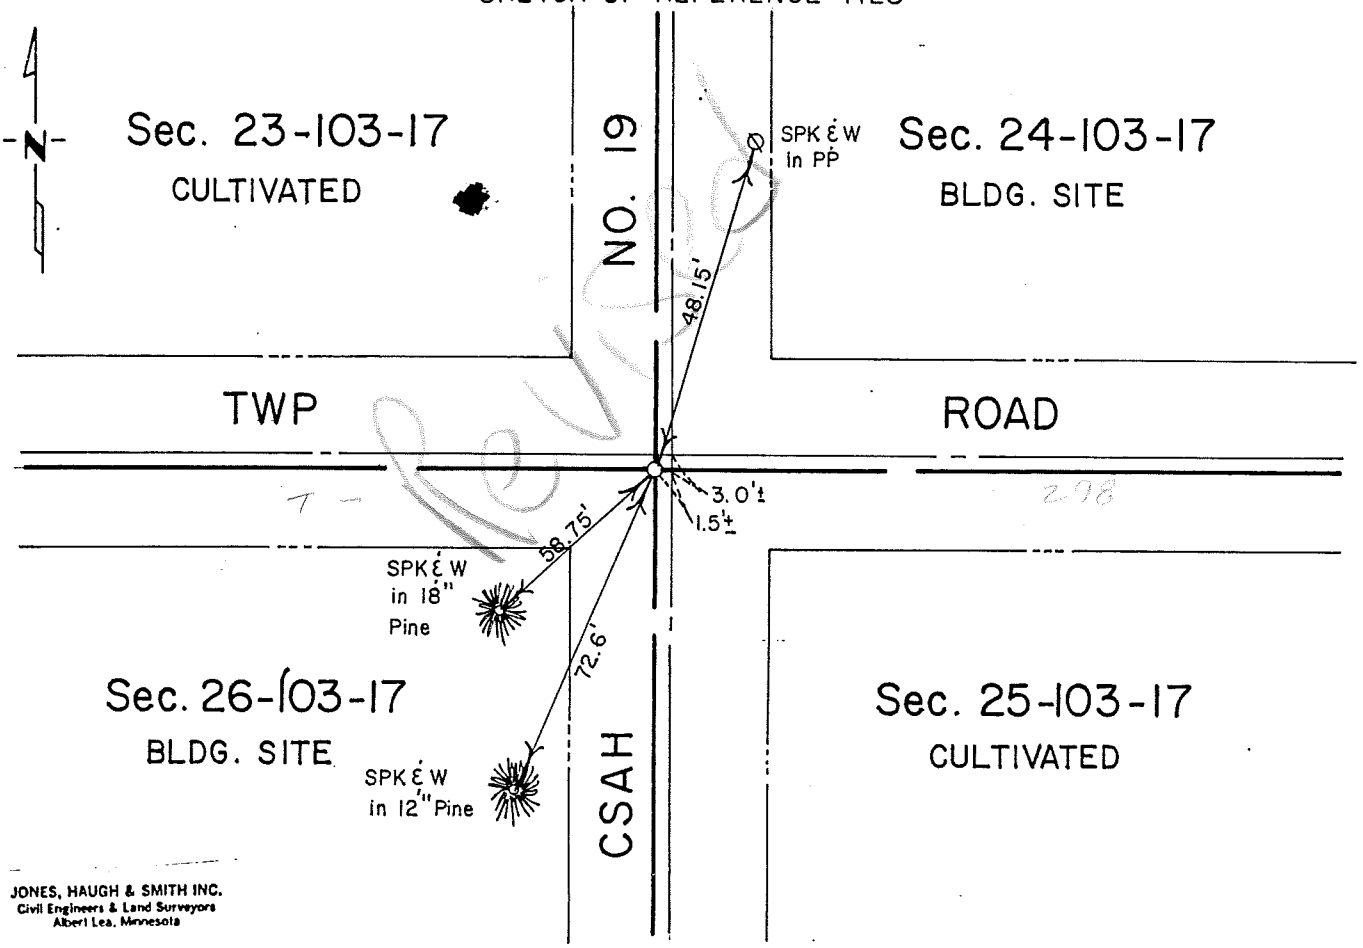

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 25-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1986 Ray Tucker, RLS 15471, placed a 1/2" diameter x 24" capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:

48.22	NE	to SPK PP
59.98	WSW	to SPK in 24" Pine
90.70	NE	to SPK in 2nd wood post east
73.60	WNW	to 3/4" iron
94.95	SW	to SPK in 24" Ash
60.41	NW	to 1/2" iron

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe for Grading Project SAP 50-619-15 and uncovered a 1/2" diameter x 24" re-bar 1" below road surface. Continued digging and found no further evidence of a public land survey corner or a perpetuation of. Therefore accepted 1/2" diameter iron set by Ray Tucker and placed a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found ~~or~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-6-91 (DATE) placed a cast iron monument on a straight line at the split.

SKETCH OF REFERENCE TIES

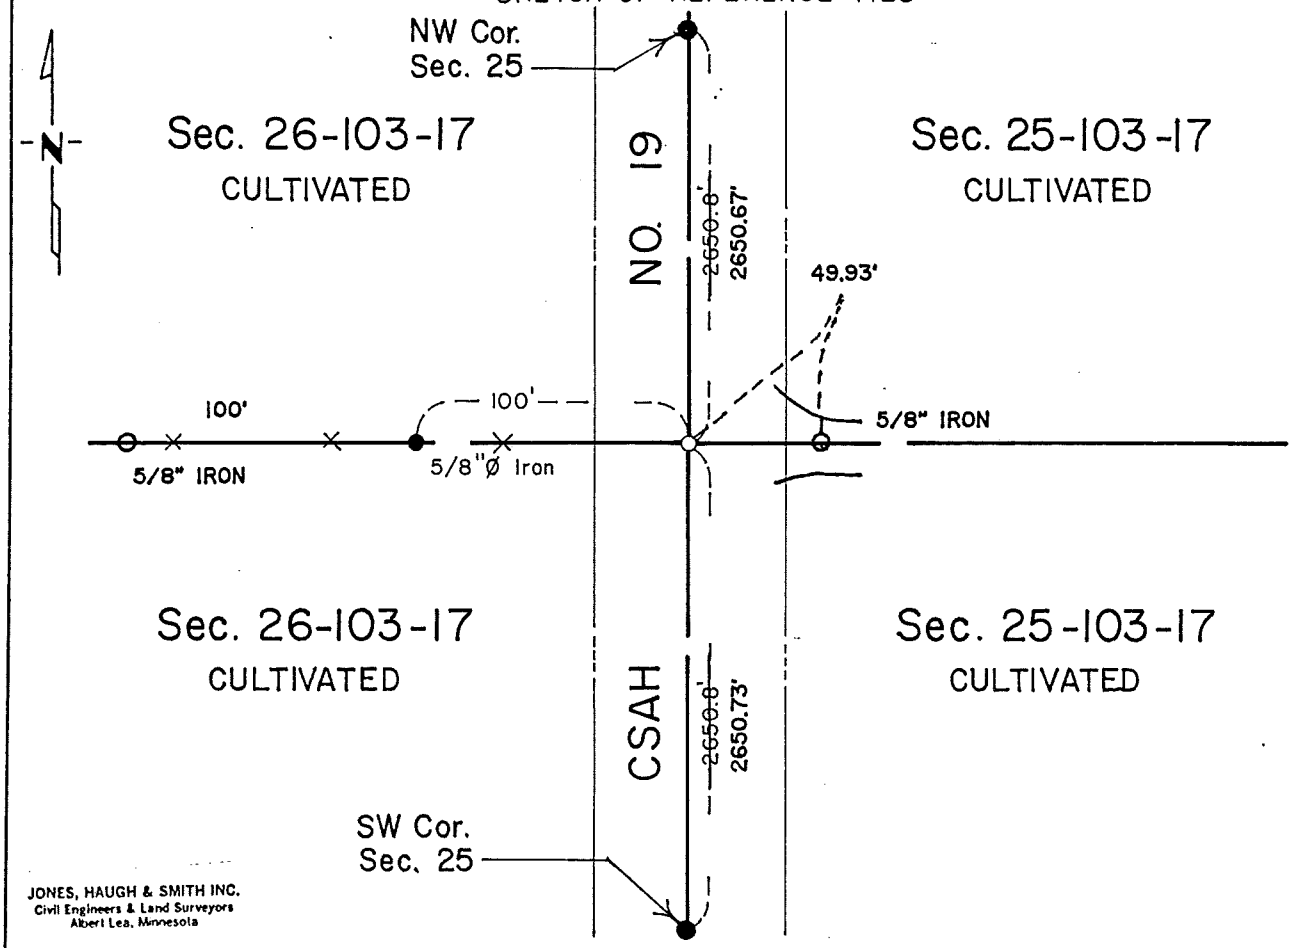

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe dug a 5' x 20' x 5' deep hole for Grading Project SAP 50-619-15 and found no evidence of a public land survey corner or a perpetuation of. Therefore established a corner as follows and set a cast iron monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-6-91 (DATE) placed a cast iron monument on a straight line at the split.

SKETCH OF REFERENCE TIES

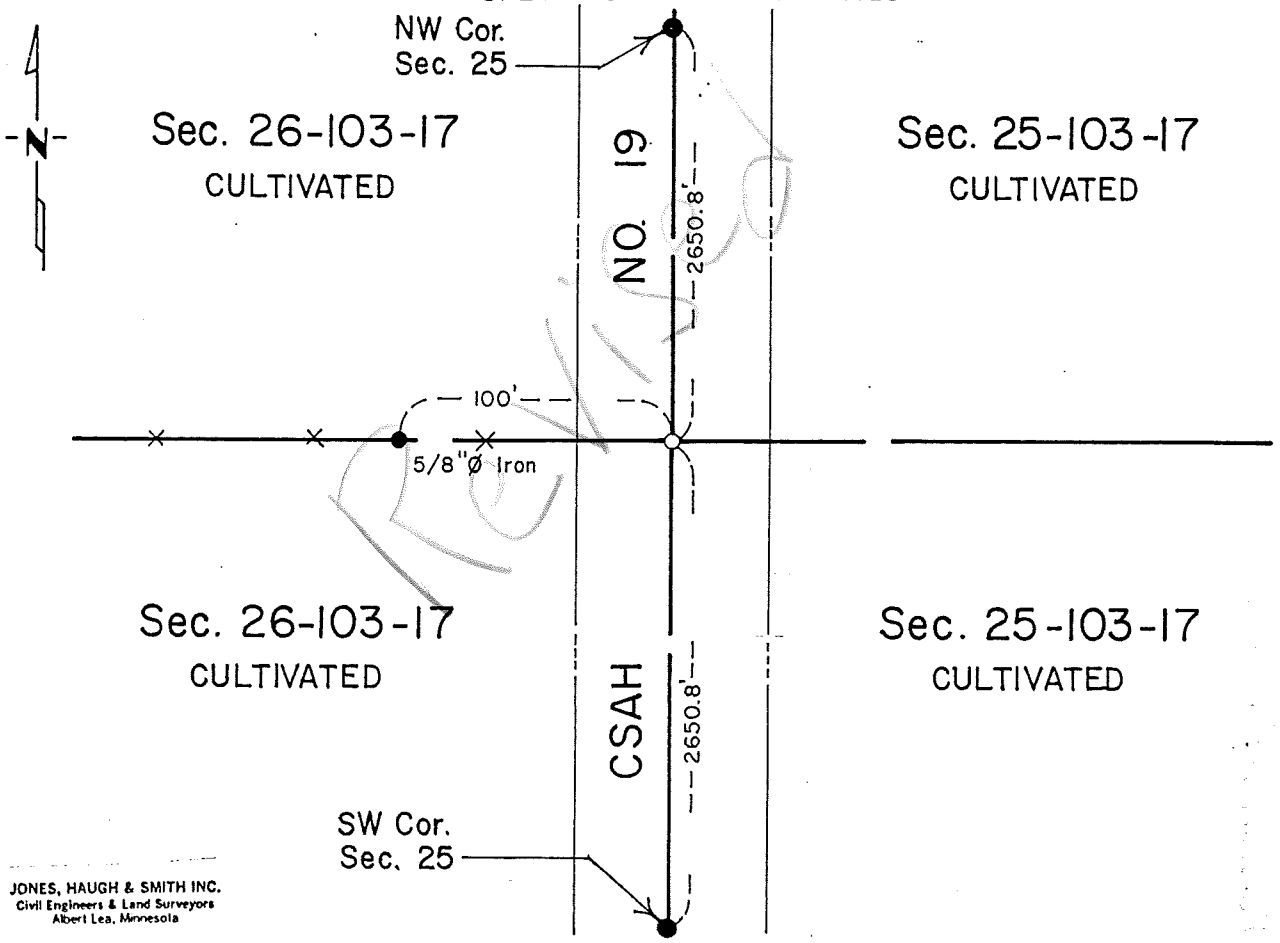

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe dug a 5' x 20' x 5' deep hole for Grading Project SAP 50-619-15 and found no evidence of a public land survey corner or a perpetuation of. Therefore established a corner as follows and set a cast iron monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 25, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a 1 1/2" SHAFT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

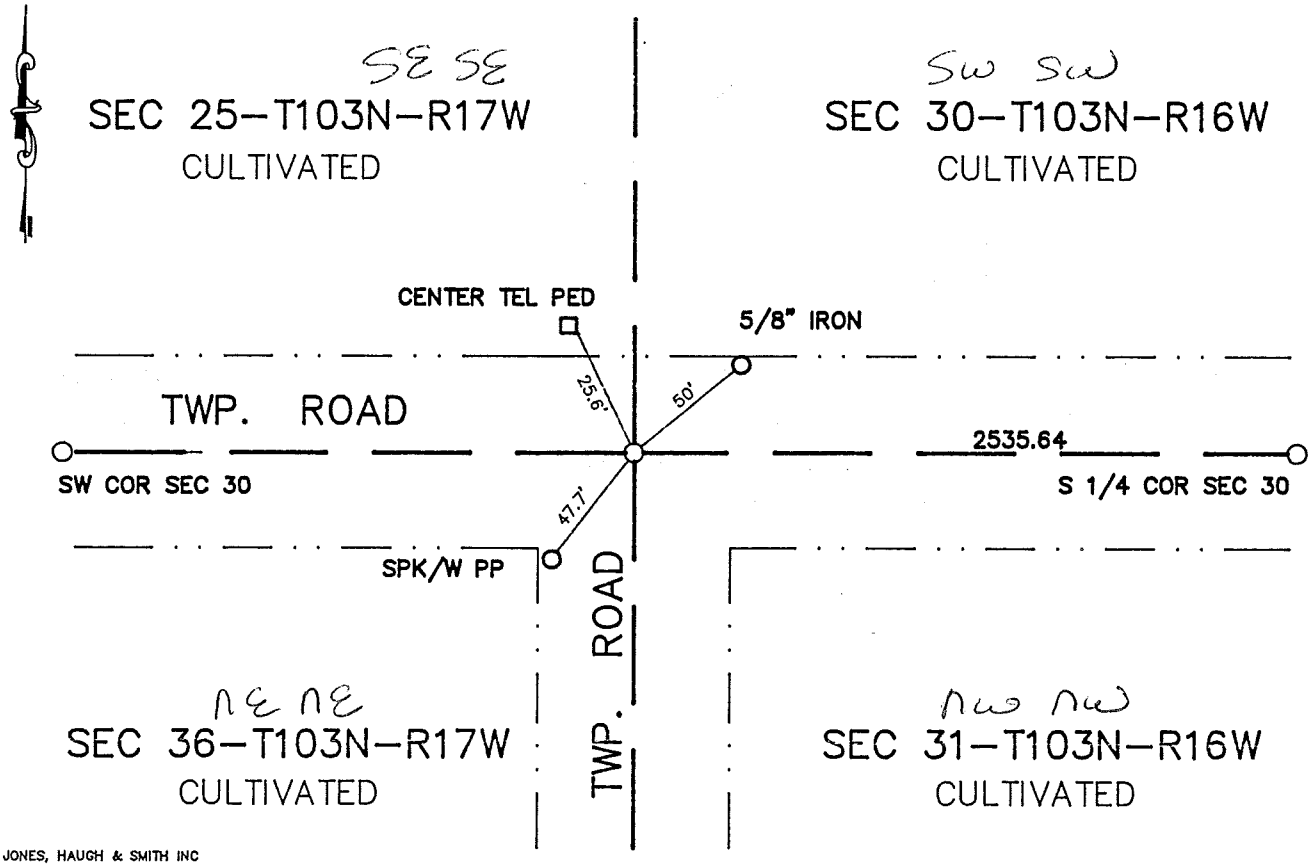

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 440236

M.H.D. FORM NO. 2105 BOOK 89 PAGE 206

Book 89 Misc Page 206

SE Cor SEC 25-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of road E-W and CL road South. Found a 1.5"x2' long shaft. Continued digging and found no other evidence of corner. Excepted shaft as perpetuation of the original PLS corner. The corner location fits CL of road E-W and is 3 feet East of the road South. Placed an iron pin on N side of shaft capped RLS 13807. Placed a cast iron monument over shaft found on road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 26, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 11-12-91 (DATE) found a 4" dia. decayed wood post 3' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-91 (DATE) placed a cast iron monument over post

SKETCH OF REFERENCE TIES

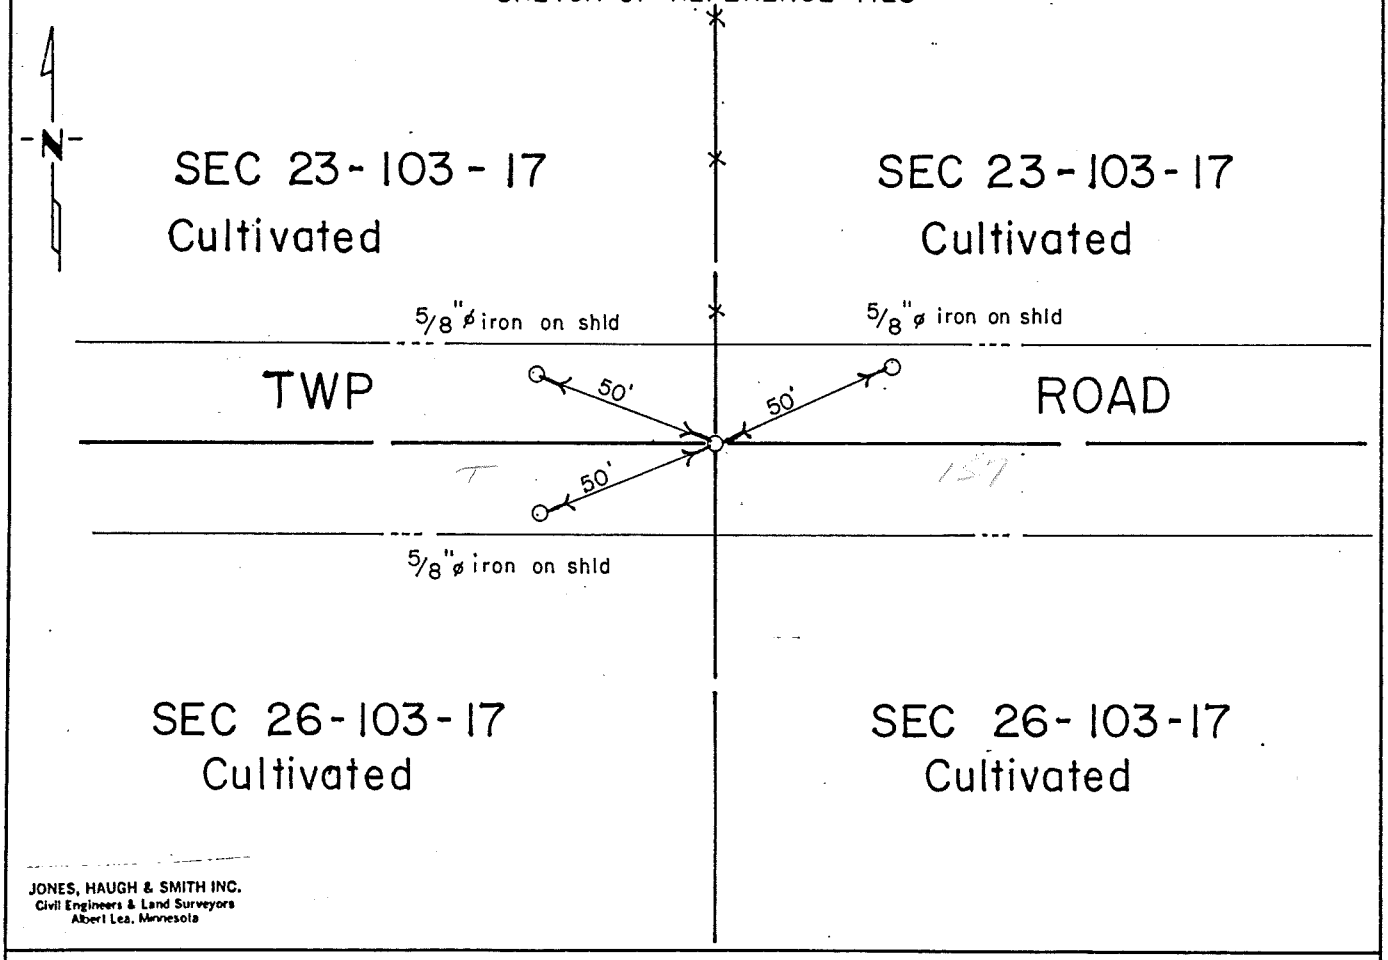

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-91

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 26-103-17

This corner was originally established by Deputy Surveyor Wm I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred post was deposited with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west roads in line with fence north and uncovered a 4" diameter decayed wood post three feet deep in virgin soil. Set a cast iron monument over post on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 11-12-91 (DATE) found a 2" dia. x 30" long pipe 3.5' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-91 (DATE) placed a cast iron monument over pipe

SKETCH OF REFERENCE TIES

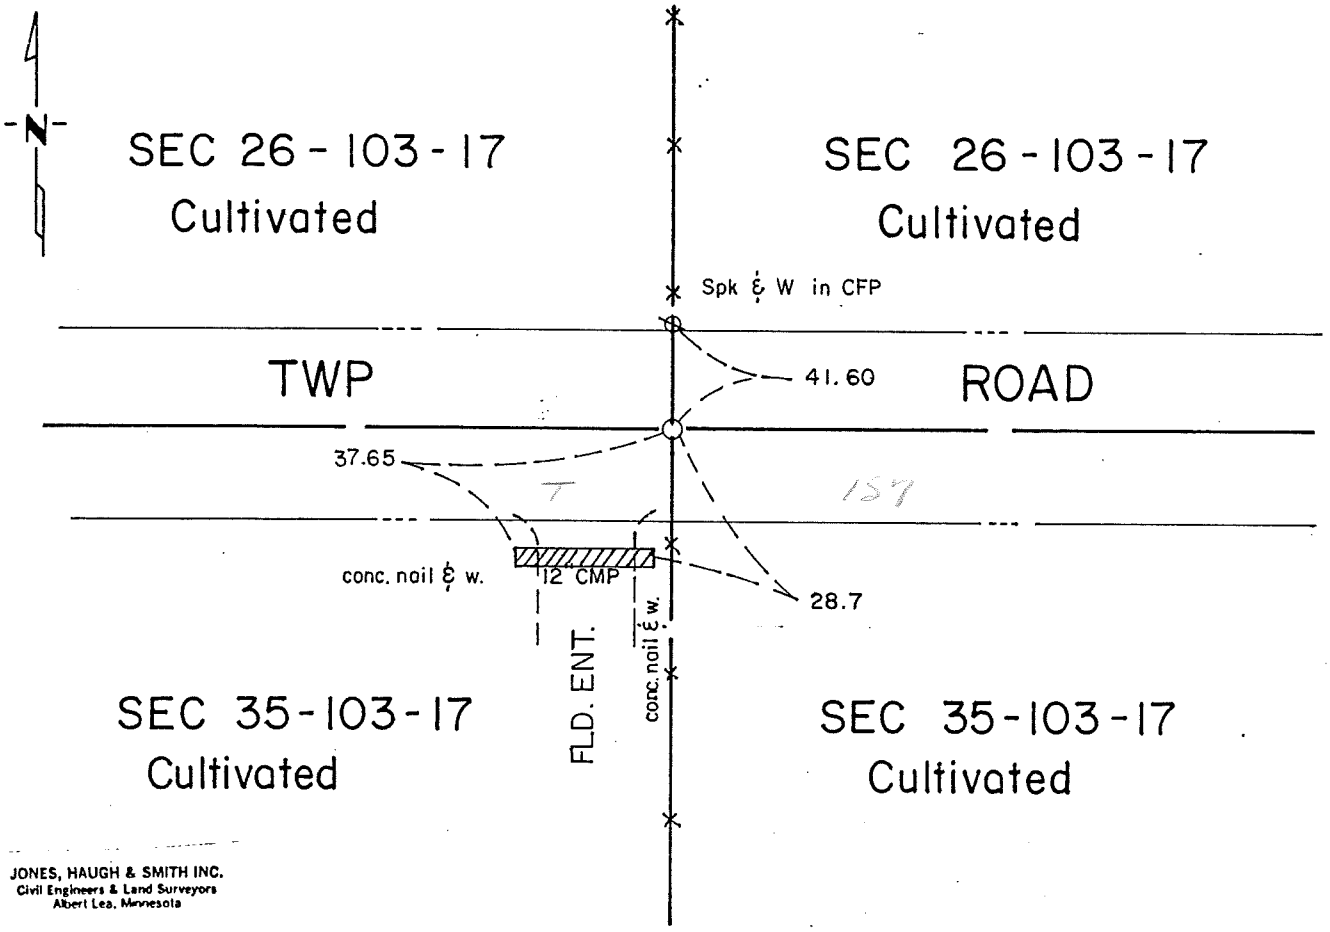

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-91

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 26-103-17

This corner was originally established by Deputy Surveyor Wm I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and a charred stake deposited with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west roads in line with fence north-south and uncovered a 2" diameter x 30" long pipe 3.5 feet below road surface in virgin soil. Continued digging and found no further evidence of public land survey corner or a perpetuation thereof. Reset 2" diameter pipe as found and set cast iron monument over pipe on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 26, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

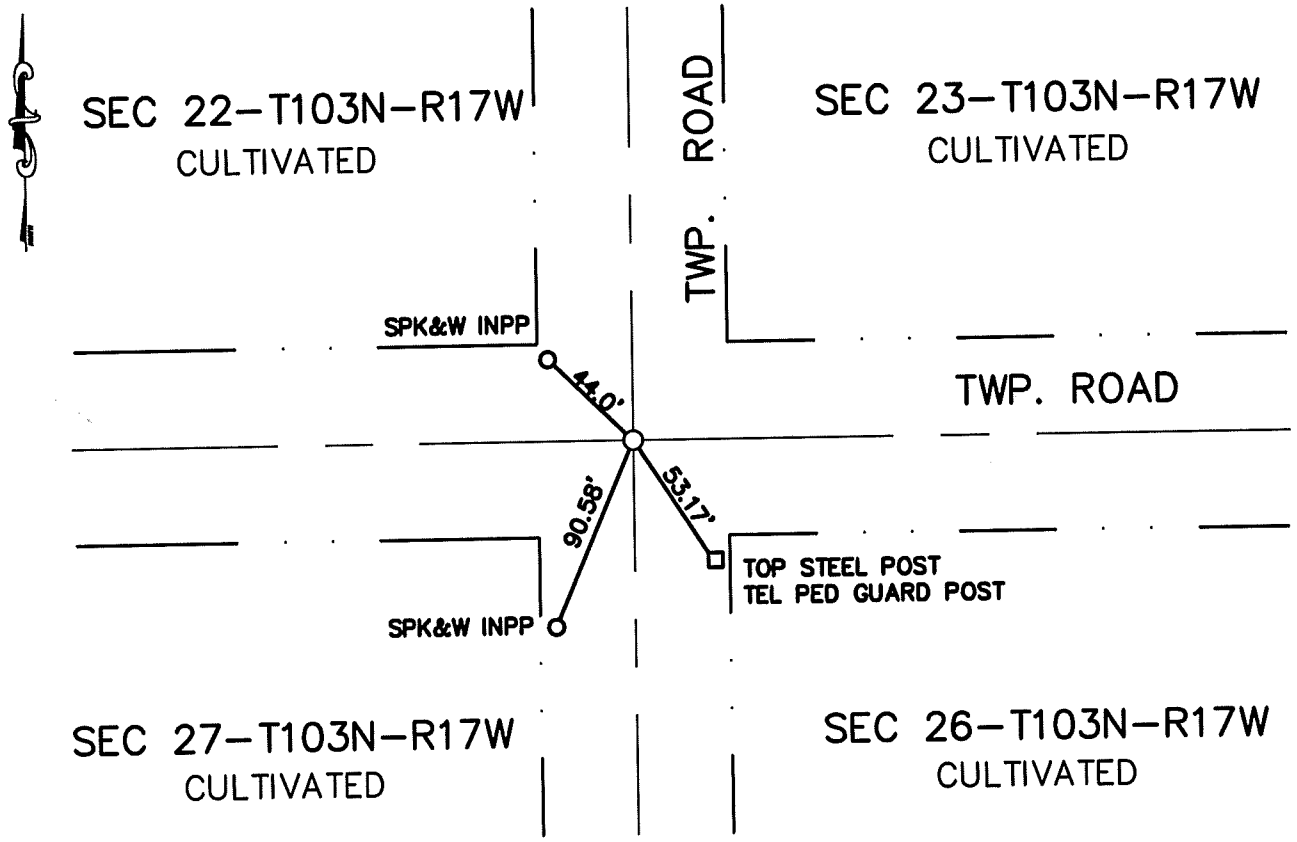

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-21-98

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor Sec 26-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe at intersection of township roads E-W and N-S. Located no evidence of the original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 26, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/25/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

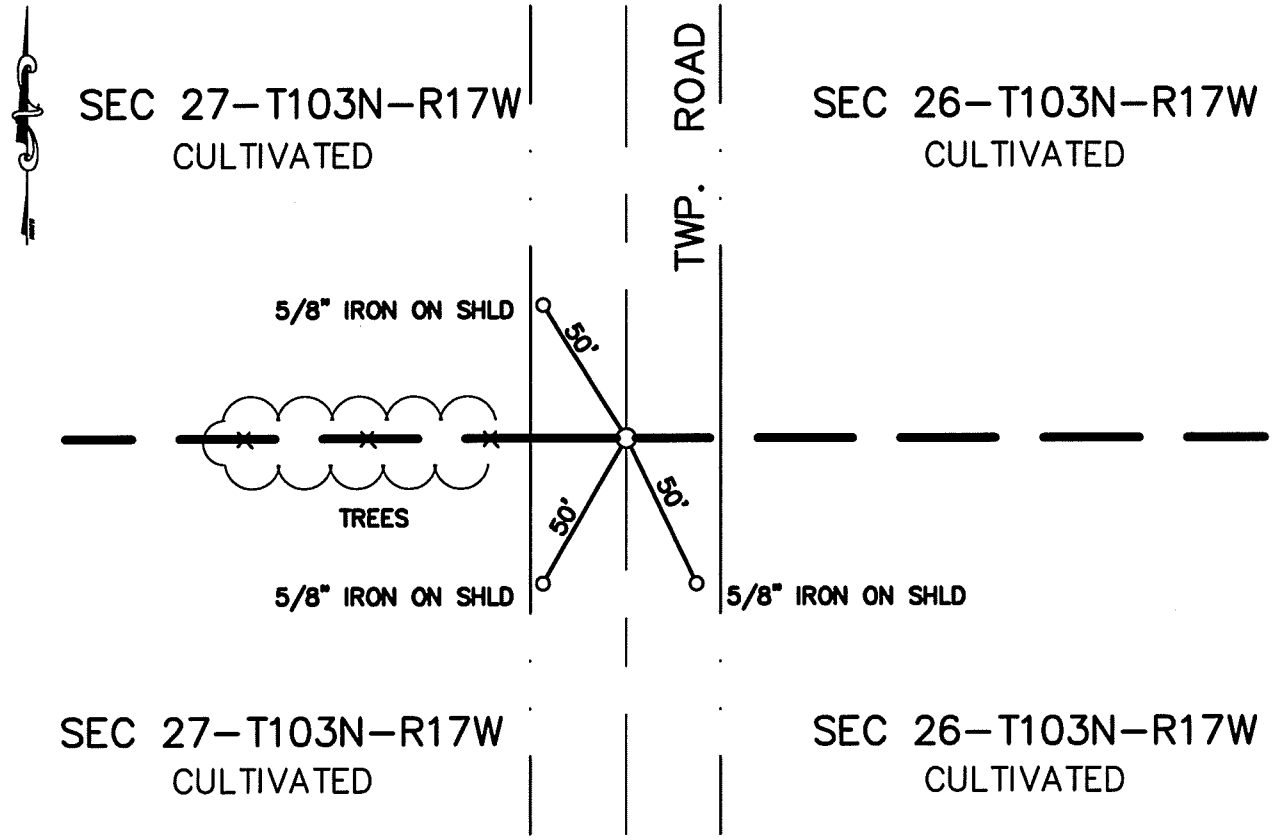

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-22-98
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 26-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew placed a temporary 5/8" iron on the centerline of township road N-S and in line with fence line west.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe at the centerline of township road N-S and in line with line fence west and field division east. Dug to virgin soil and found no evidence of the original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 27, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a CONCRETE NAIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a RAILROAD SPIKE

SKETCH OF REFERENCE TIES

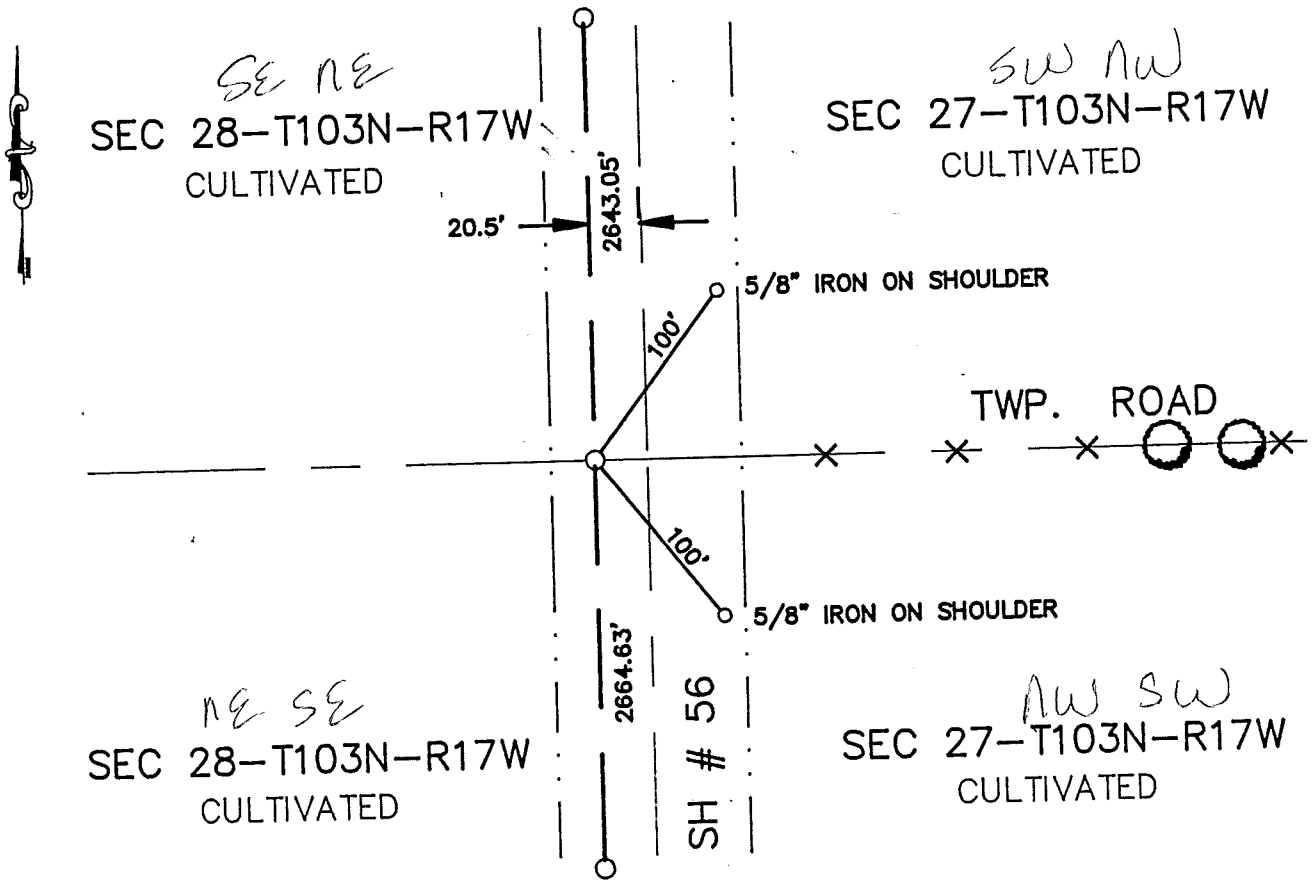

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 5 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447640

M.H.D. FORM NO. 2105 BOOK 92 PAGE 355 Book 92 Misc Page 355

W 1/4 Cor SEC 27-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew placed a spike on the west edge of bituminous Using data from old TH #56 R\W plans.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found concrete nail on the west edge of bituminous and in agreement with 1994 notes. Placed a railroad spike inplaced of nail and took ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 27, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a RAILROAD SPIKE

SKETCH OF REFERENCE TIES

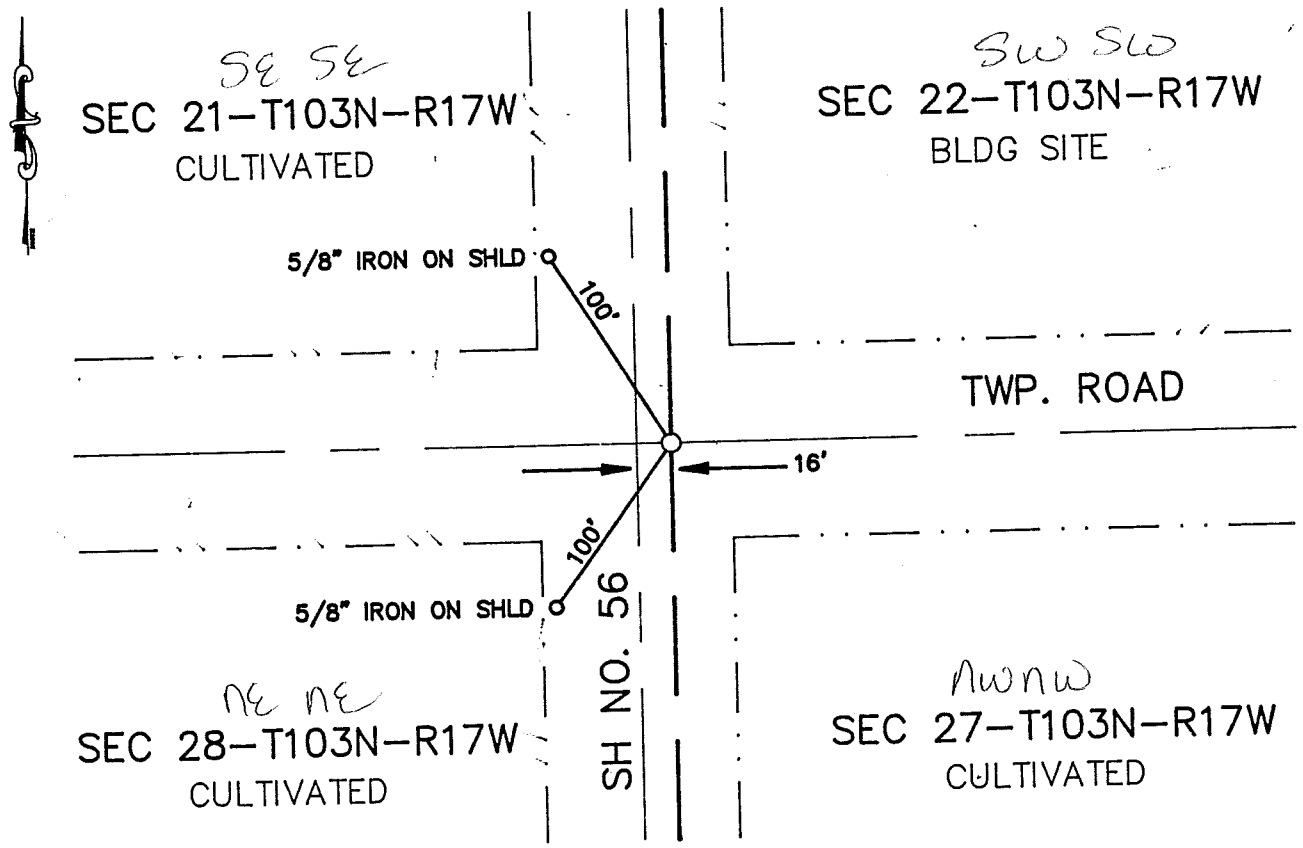

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 5 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447639

M.H.D. FORM NO. 2105 BOOK 92 PAGE 353 Book 92 Misc Page 353

NW Cor SEC 27-103-17

This corner was originally established by Deputy Survey William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1977 Jones Haugh and Smith crew measured distance to E-W-N-S to establish a location for this corner which fits information shown on TH No. 56 R/W map.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, measured 16' east of centerline SH # 56 down centerline township road and set RR spike using information from 1977 survey information.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 28, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

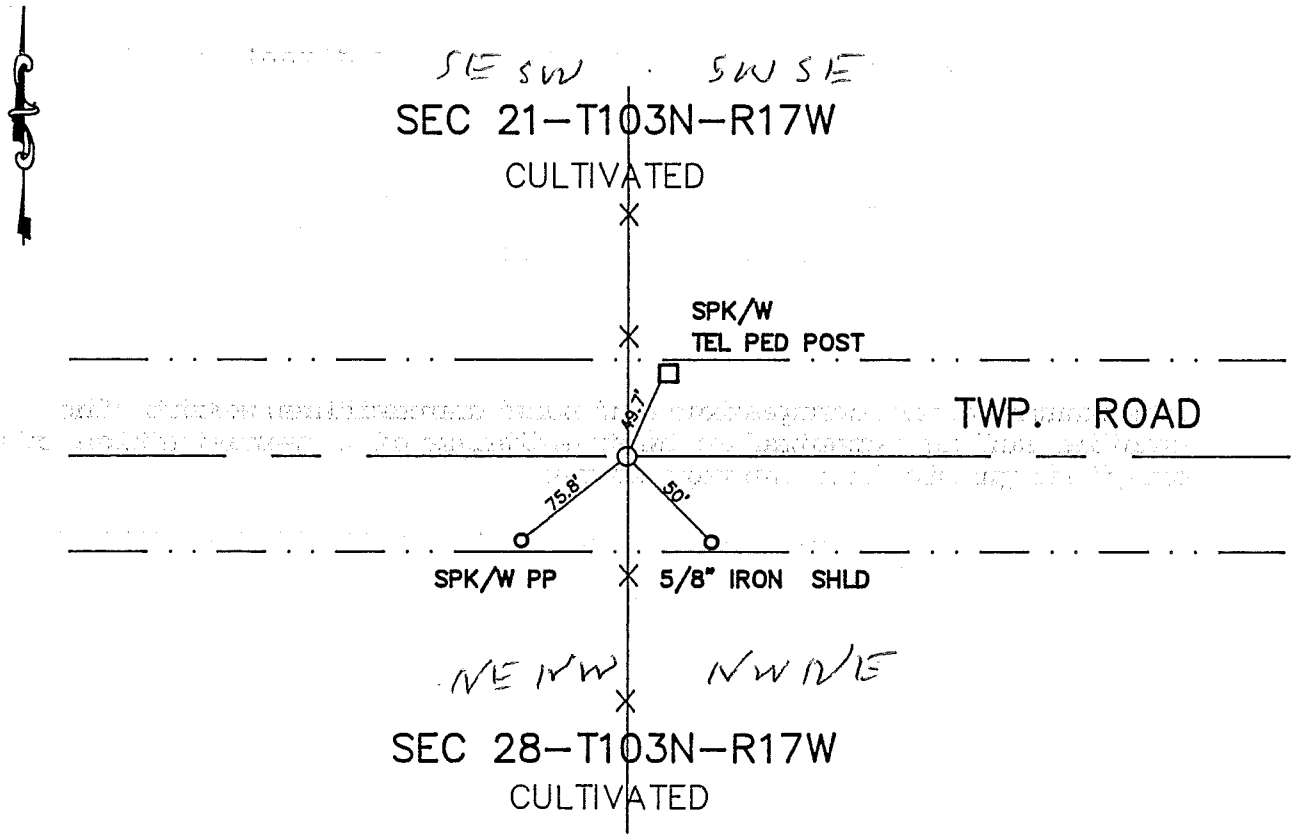

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-95 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 3 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 140542

M.H.D. FORM NO. 2105 BOOK 89 PAGE 143

Book 89 Misc Page 143

N 1/4 Cor SEC 28-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of road and in line with field division North and field division South. Found no evidence of corner. Placed a cast iron monument in CL of road and in line with field division North and with field division South.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 28, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1995 (DATE) found a 2' IRON

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 06/09/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

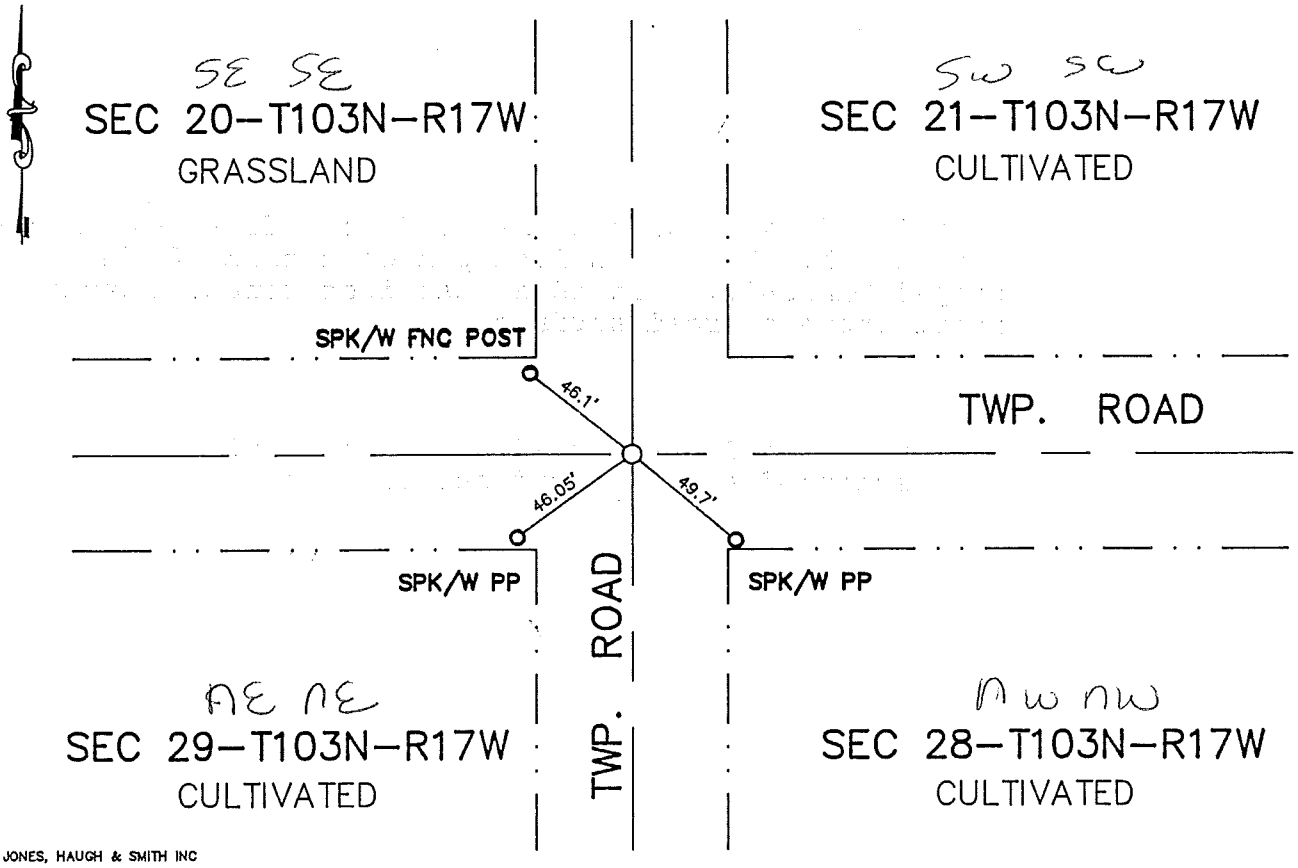

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 140737

M.H.D. FORM NO. 2105 BOOK 89 PAGE 208

Book 89 Misc Page 208

NW Cor SEC 28-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL of roads N-S and E-W. Found an iron pin cap No. 15471. Continued digging and found a 6" drain tile 3.5' deep. Found no other evidence of corner. Spoke with Gary Morgan, property owner to East of this corner, he stated he had his property surveyed about 30 years ago. We found his corners and got the description of his property which starts at the NW corner of the section and goes 1400' east to the NW corner of his property. The measured distance to the iron pin found was 1398.70'. Therefore we moved the found iron West 1.30' to match the previous survey. Placed a cast iron monument. Monument fits CL CL of N-S and E-W roads and previous surveys.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 29, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/16/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/16/1996 (DATE) placed a 5/8" IRON CAPPED #13807

SKETCH OF REFERENCE TIES

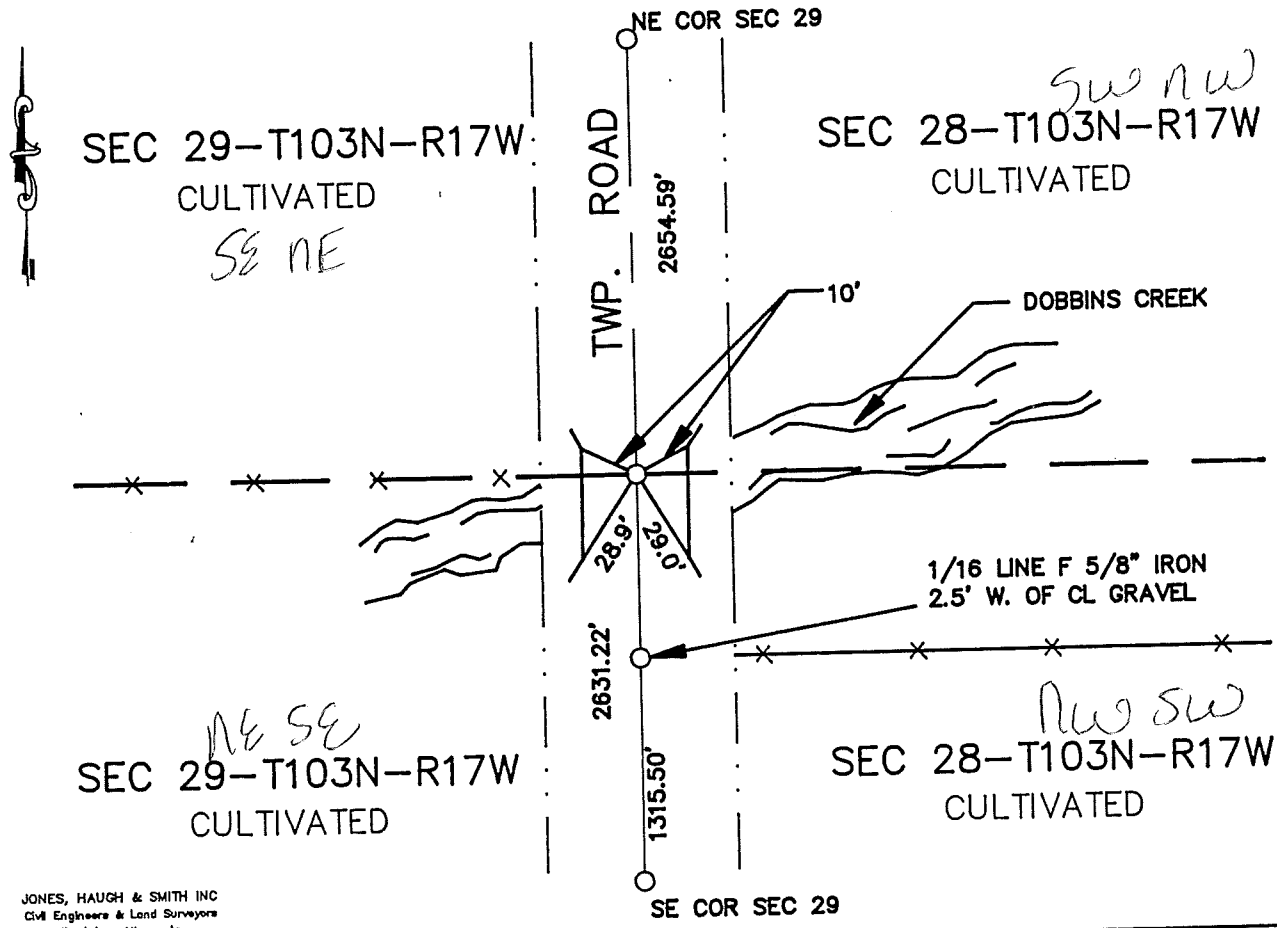

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 6 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447680

M.H.D. FORM NO. 2105 BOOK 92 PAGE 364

Book 92 Misc Page 364

E 1/4 Cor SEC 29-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 set a 5/8" iron capped RLS 13807 in the north end of a bridge deck in accordance with a 1975 JHS survey. The corner fits the CL of the road and is in line with a fenceline to the west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 29, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/15/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

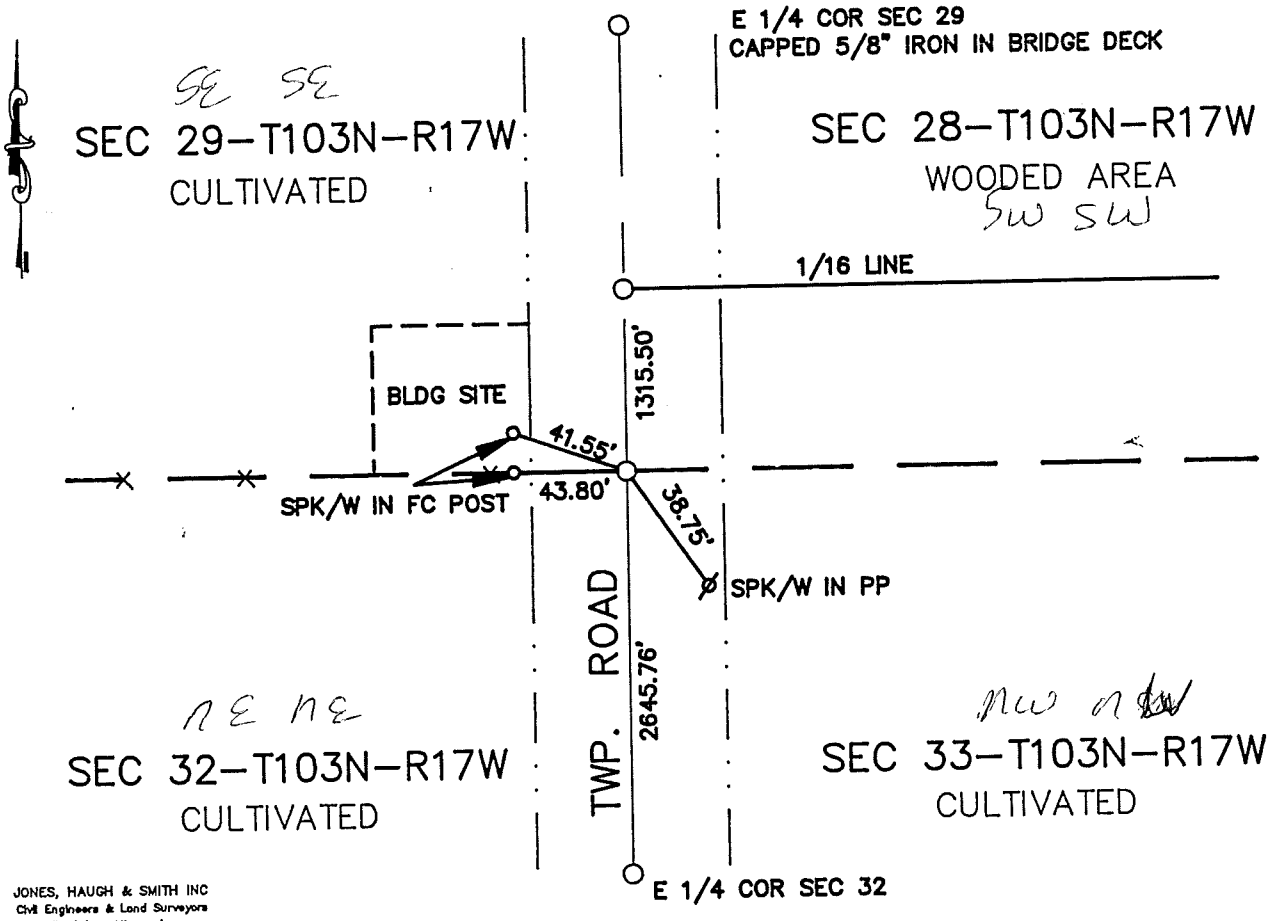

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 5 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447641

M.H.D. FORM NO. 2105 BOOK 92 PAGE 357

Book 92 Misc Page 357

SE Cor SEC 29-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1975 Jones Haugh and Smith records show a corner at this location.

1996 Jones Haugh and Smith crew dug at this location, under direction of John Schulte, Mower County Surveyor RLS 13807, and found no evidence of original PLS corner. Set a cast iron monument using JHS records of 1975. Corner was set on a straight line from the E 1/4 corner of section 29 and the 16th corner on the east side of the SE 1/4 at a distance of 1315.50 south from the 1/16 corner. The corner fits the road centerline and line fence west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/07/1996 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

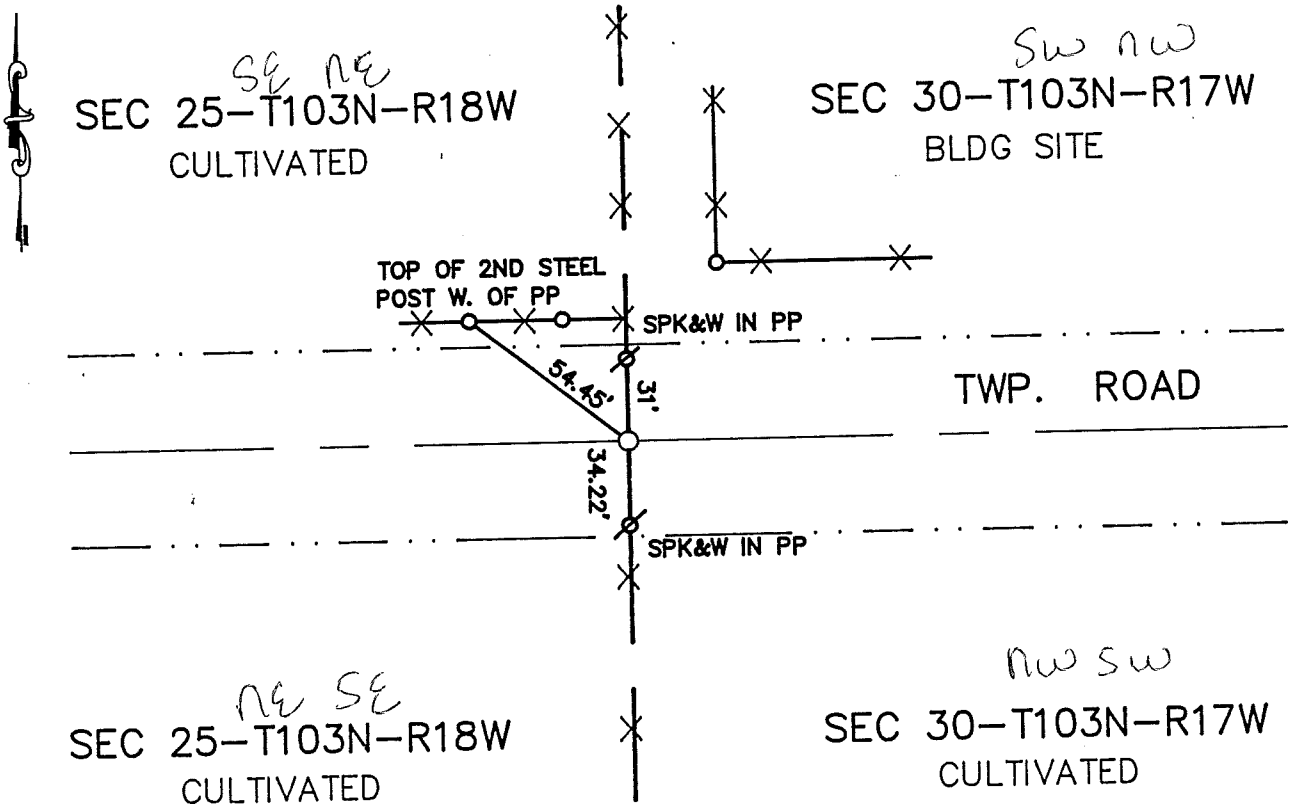

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 6 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447681

M.H.D. FORM NO. 2105 BOOK 92 PAGE 366

Book 92 Misc Page 366

W 1/4 Cor SEC 30-103-17

This corner was originally established by Deputy Surveyor Williaim I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1977 Jones Haugh and Smith crew dug corner and found 3/4" pipe.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a 3/4" pipe .70' below road surface on centerline of township road and in line with line fence north and line fence south which is in agreement with 1977 records. Set cast iron monument over pipe found .30' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 30, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/07/1995 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

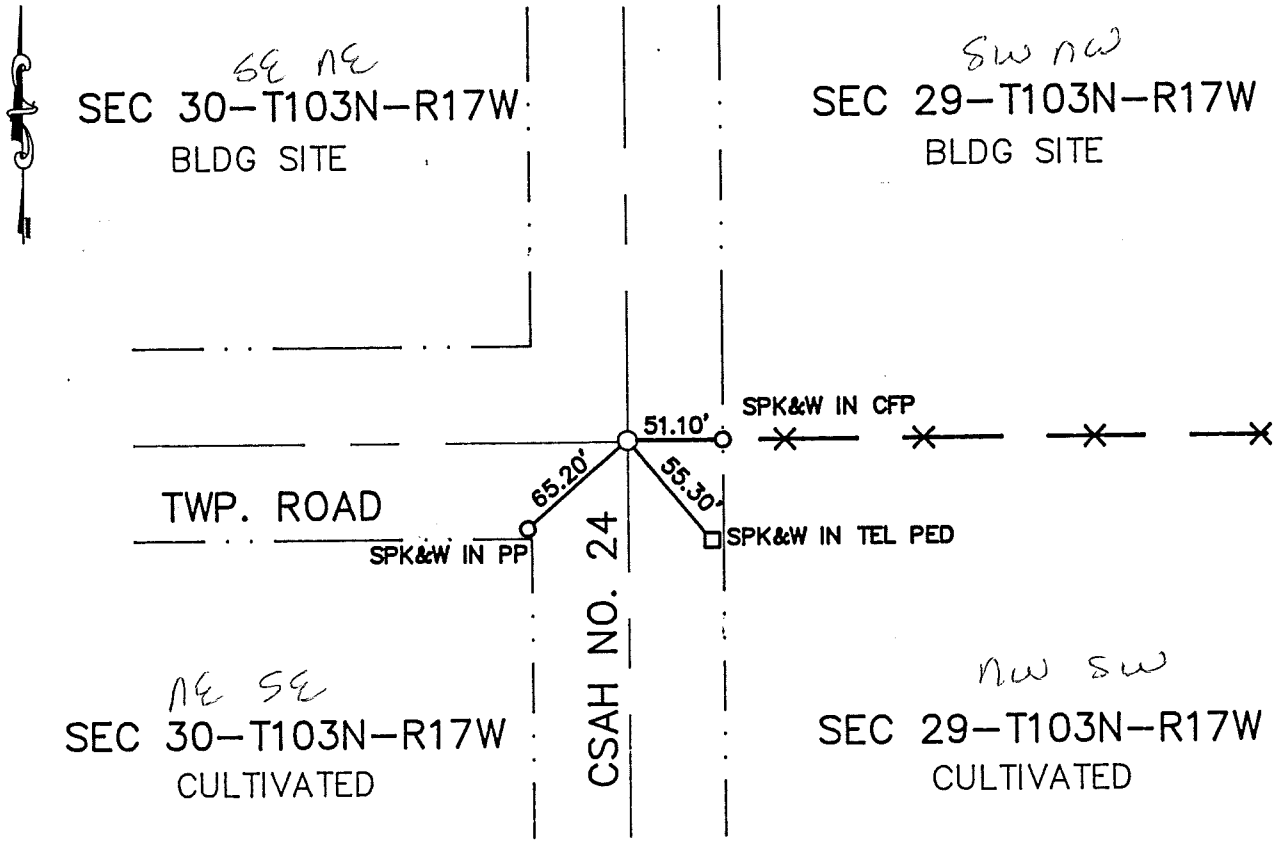

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 6 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447682

M.H.D. FORM NO. 2105 BOOK 92 PAGE 368

Book 92 Misc Page 368

E 1/4 Cor SEC 30-103-17

This corner was originally established by Deputy William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department R/W plans shows a corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a 3/4" pipe on centerline of CSAH NO. 24 and centerline of the township road west, in line with line fence east. This monument is in agreement with the Mower County records. Set cast iron monument over pipe found, at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/07/1996 (DATE) found a PK NAIL AND 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

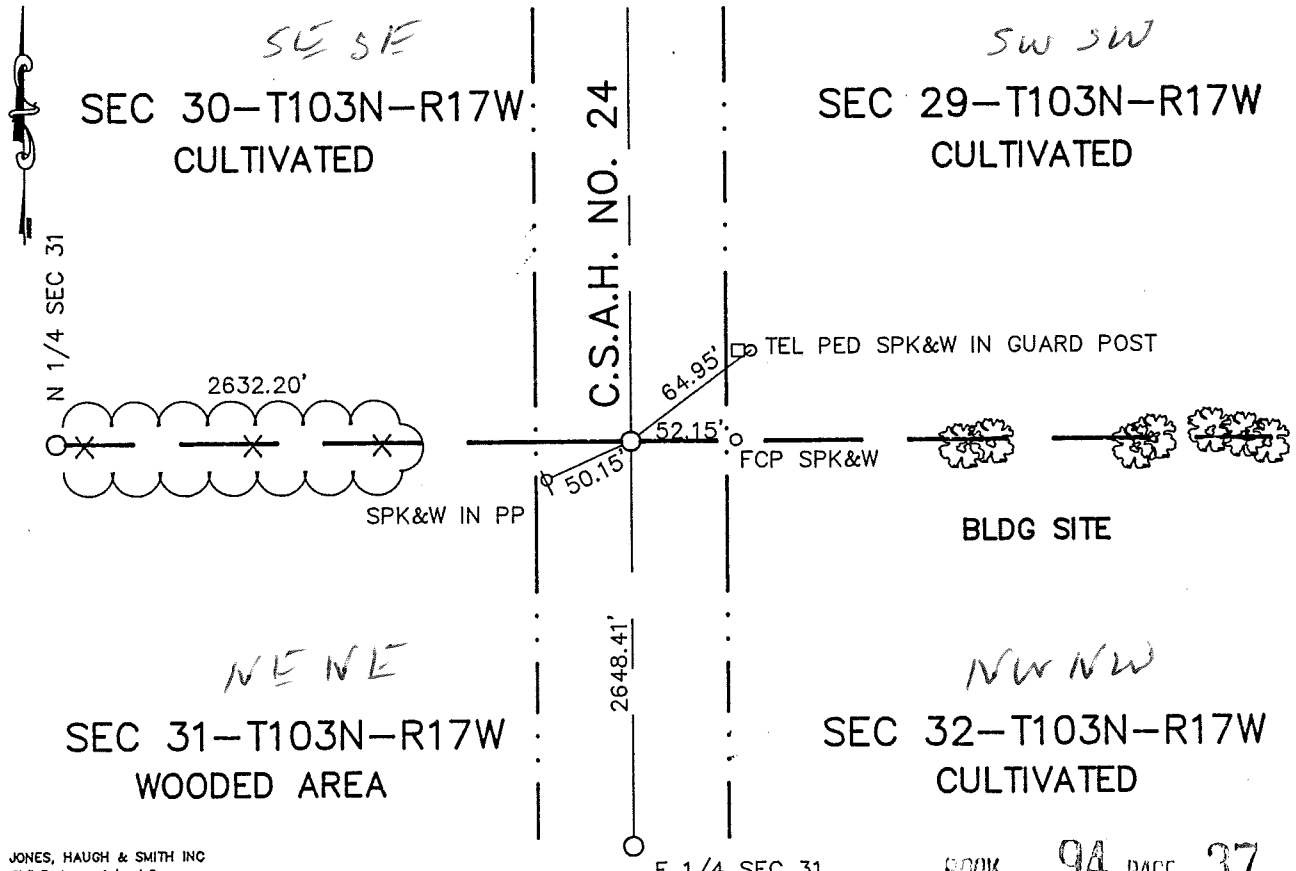

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 37

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P.M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450687

M.H.D. FORM NO. 2105

Book 94 Misc Page 37

NE Cor SEC 31-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1972 Jones Haugh and Smith crew placed PK-nail over concrete monument.

1984 Mower County records state in place concrete monument. Jones Haugh and Smith crew placed cast iron monument over concrete monument.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found PK nail at road surface. Continued digging found 3/4" pipe. Pipe fits centerline of CSAH no. 24 and in line with line fence east and line fence west and is in agreement with 1972 and 1984 location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 31, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/16/1972 (DATE) found a 5/8" IRON IN LINE WITH E & W FENCE LINE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

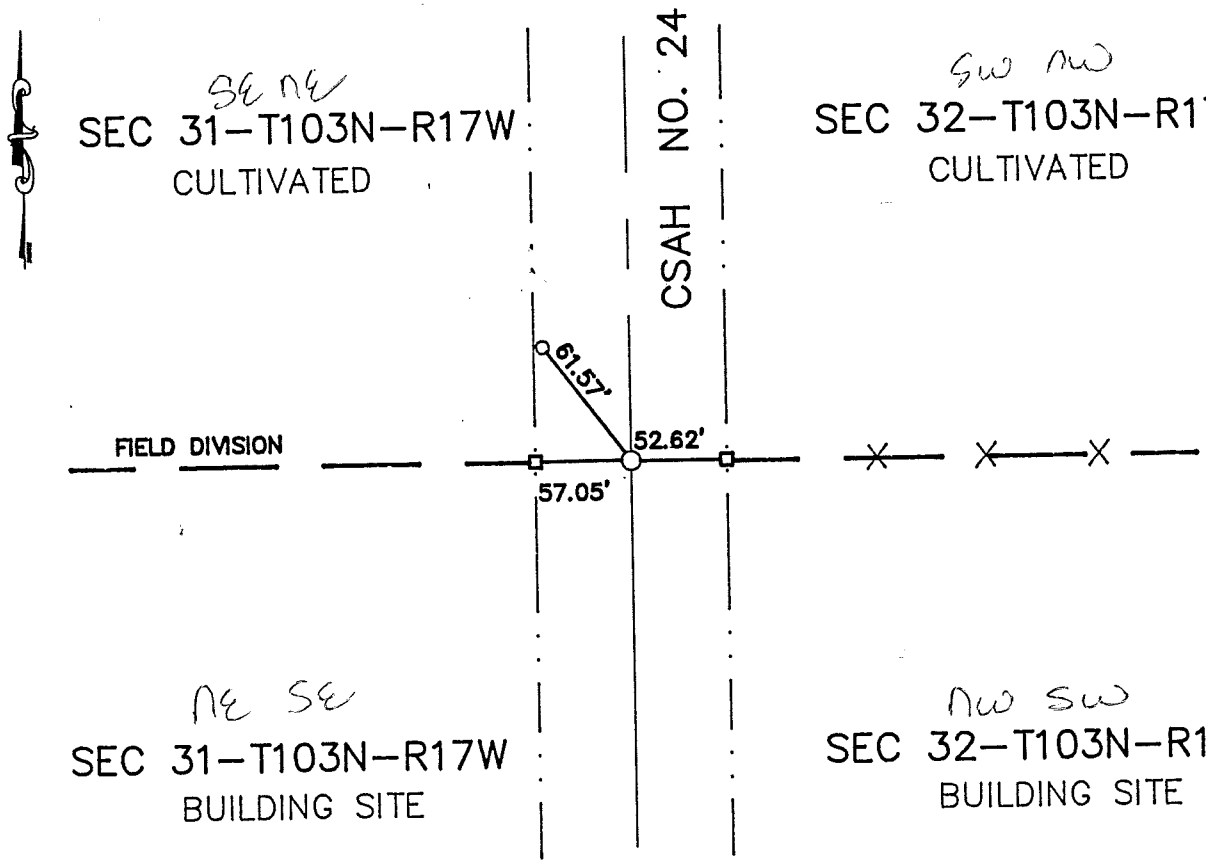

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 6 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447683

M.H.D. FORM NO. 2105 BOOK 92 PAGE 370 Book 92 Misc Page 370

E 1/4 Cor SEC 31-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department records show a corner at this location.

1972 Jones Haugh and Smith crew, dug and found a 5/8" iron in line with east and west fence line.

1995 Jones Haugh and Smith crew located corner, found 5/8" iron on centerline of CSAH NO. 24 and in line with field division west and fence line east which was in agreement with Mower County Highway Department records and 1972 Jones Haugh and Smith records. Set cast iron monument over 5/8" iron found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 31, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/16/1972 (DATE) found a 1" DRILL HOLE 5.1' S. OF BRASS PLUG ON C.L.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/07/1995 (DATE) placed a CAP OVER 5/8" IRON

SKETCH OF REFERENCE TIES

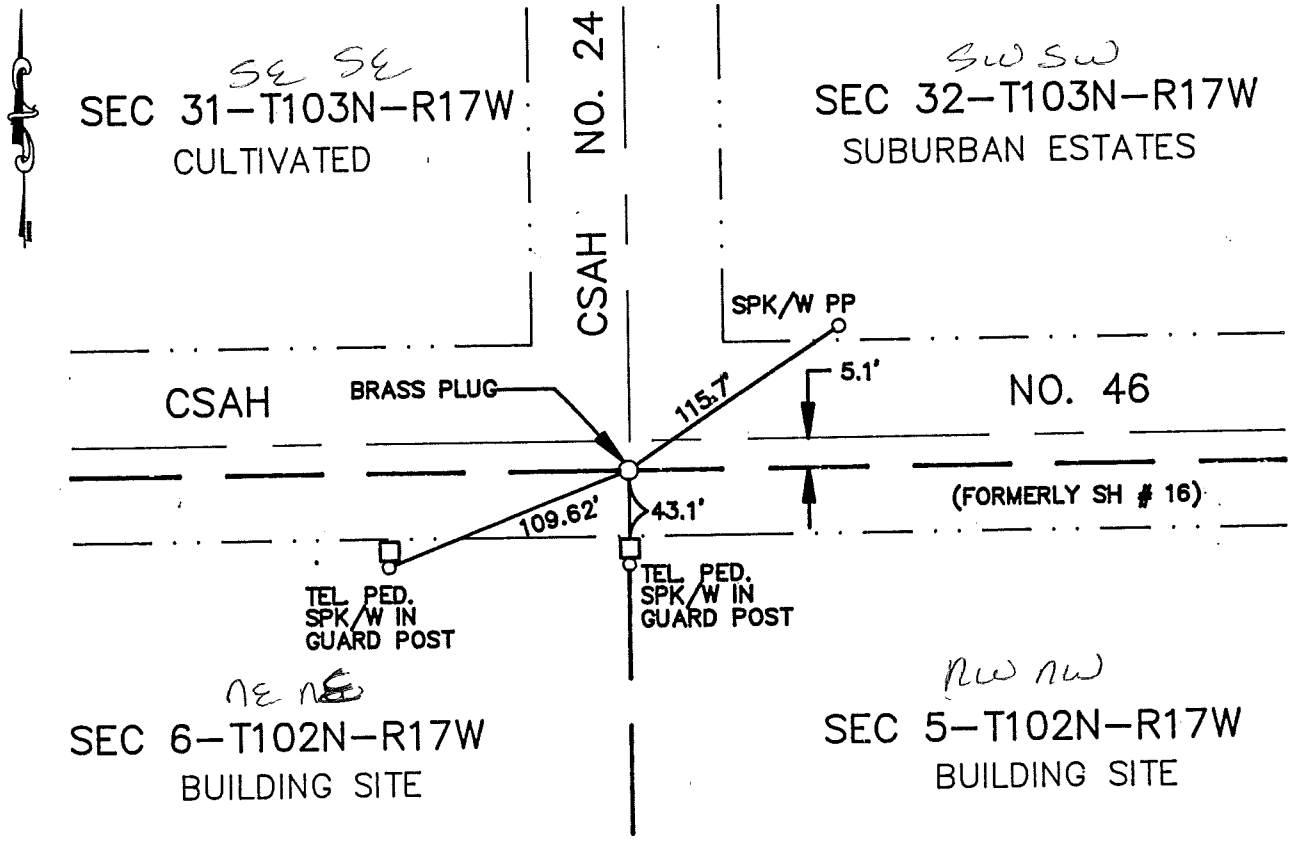

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 6 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447684

M.H.D. FORM NO. 2105 BOOK 92 PAGE 372

Book 92 Misc Page 372

SE Cor SEC 31-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department records state inplace brass plug in the center of concrete slab. MN DOT 1930 TH # 16 R/W map shows brass plug in concrete 5.1' south of centerline.

1972 Jones Haugh and Smith crew found a 1" diameter hole in center of concrete slab of east bound lane 5.1' south of brass plug on CL of CSAH No. 46.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron drilled in concrete 5.1' south of brass plug on centerline. Placed a plastic cap # 13807 over 5/8" iron found, which is in agreement with the 1930 MNDOT position.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/09/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

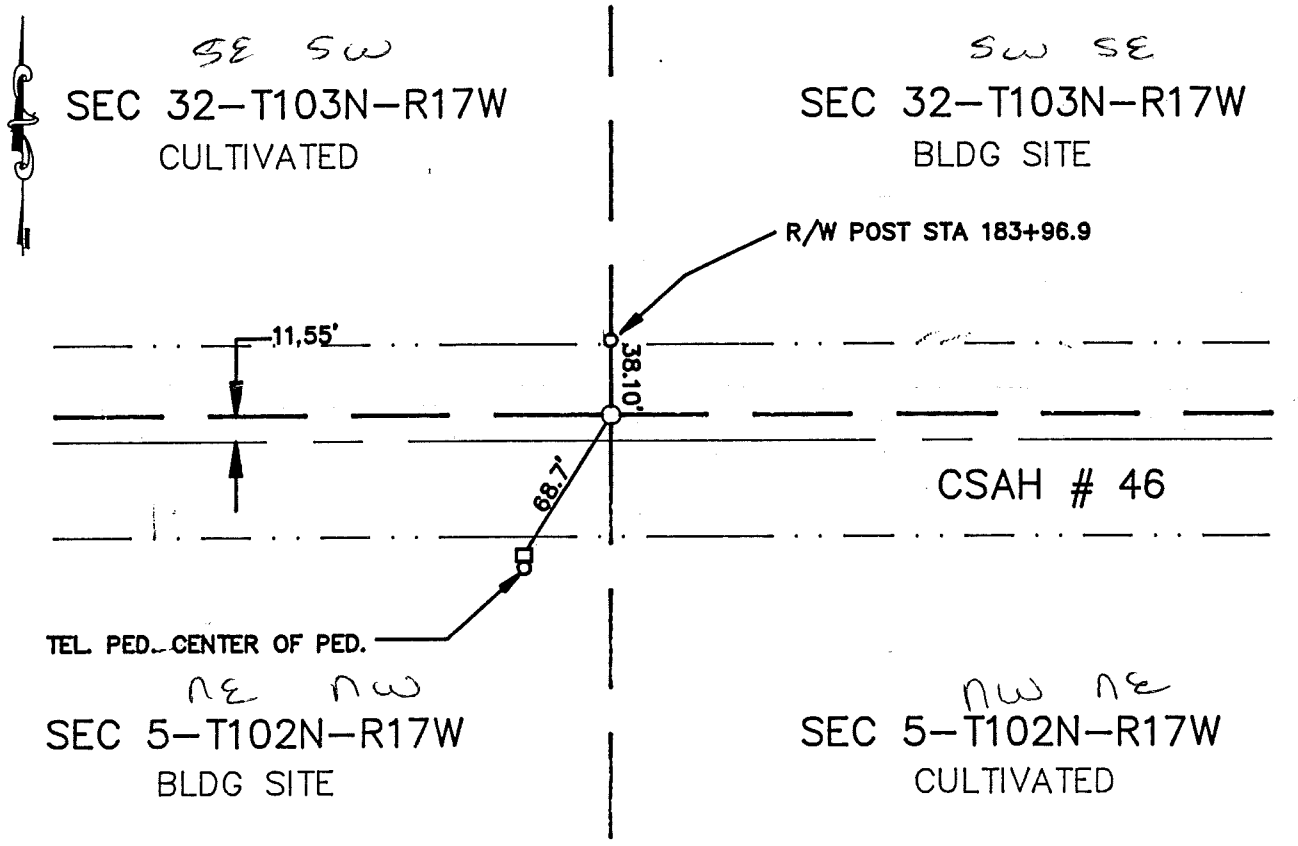

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-10-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447782

M.H.D. FORM NO. 2105 BOOK 92 PAGE 393 Book 92 Misc Page 393

S 1/4 Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County records state, corner was found 11.55' N. of centerline of CSAH # 46 (formerly TH No. 16) MHD STA-183+96.9. Found 5/8" iron.

1930+- TH No. 16 R/W map shows a corner at station 183+96.9 11.5' north of CL.

1973 Jones Haugh and Smith crew, found corner. Uncovered 5/8" iron 11.5' N. of centerline Mower County Highway Department 183+96.9.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered corner. Found 5/8" iron 11.55' N. of centerline. Set cast iron monument over iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/08/1996 (DATE) found a PK NAIL ON CL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/08/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

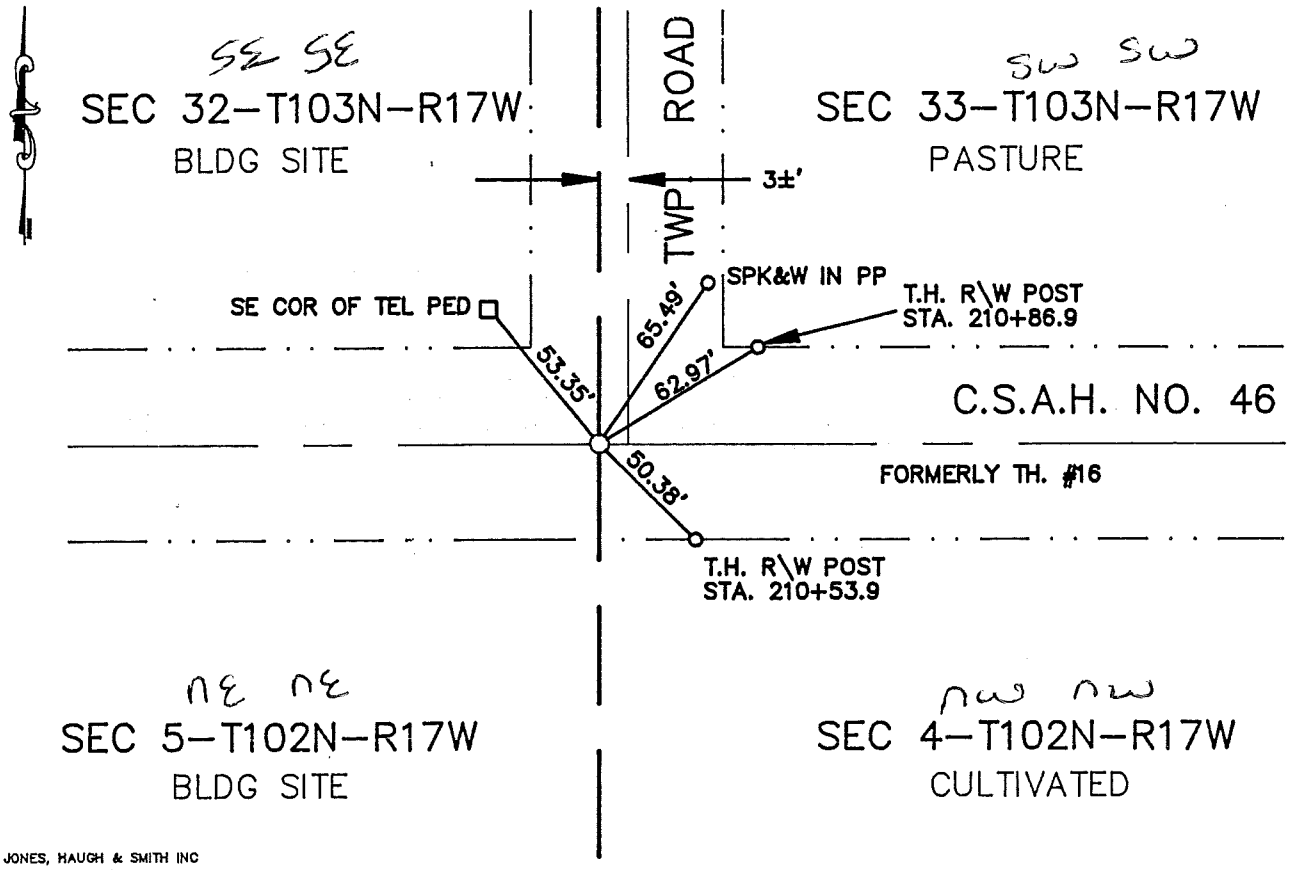

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 447781

M.H.D. FORM NO. 2105 BOOK 92 PAGE 391

Book 92 Misc Page 391

SE Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930+- MNDOT R/W map for SH No. 16 shows a location for this corner.

1994 Jones Haugh and Smith crew located a spike and washer on the CL of CSAH No. 46. (formerly SH No. 16)

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, removed spike and washer and set a cast iron monument at this location. This postion is in agreement with 1930+- SH No. 16 R/W plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1994 (DATE) found a 5/8 " ROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/08/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

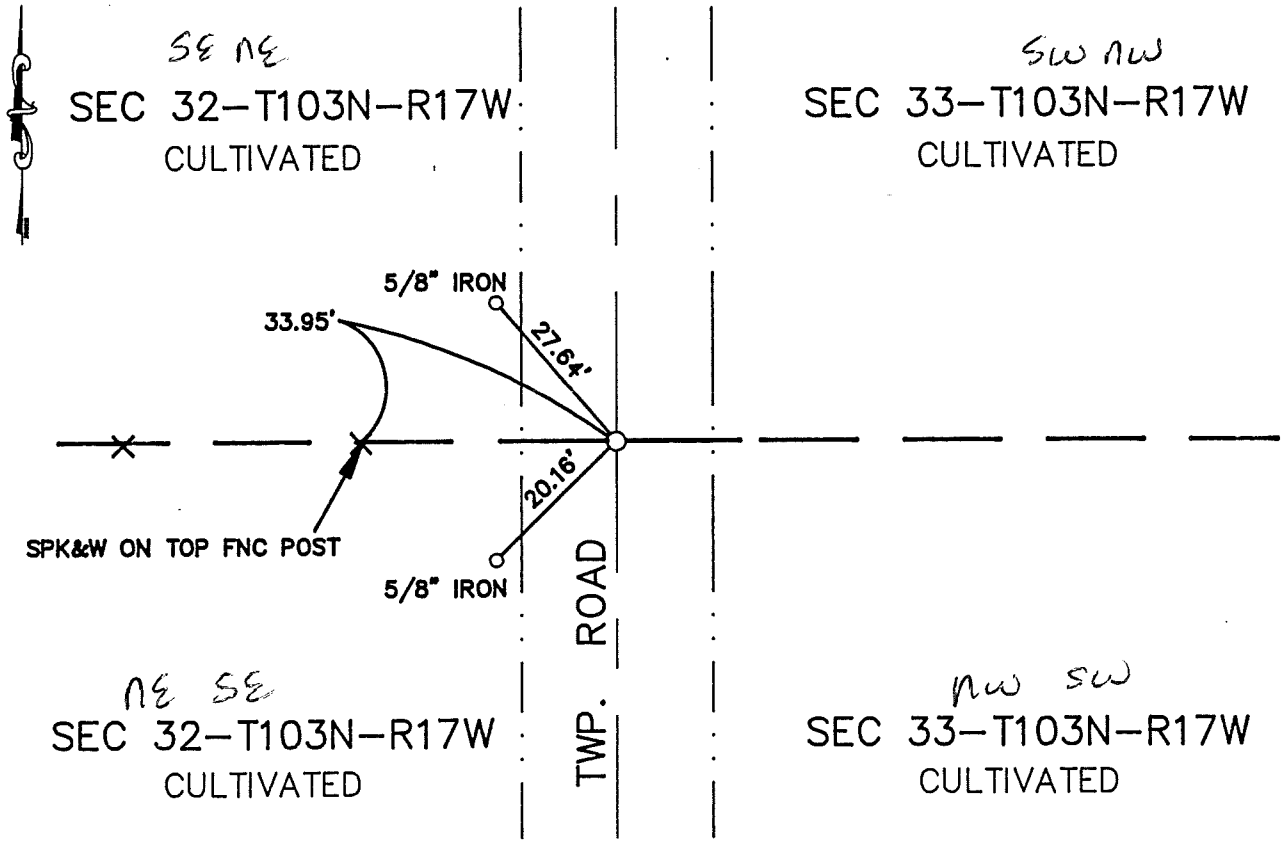

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] SIGNATURE 9-10-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447780

M.H.D. FORM NO. 2105 BOOK 92 PAGE 389 Book 92 Misc Page 389

E 1/4 Cor SEC 32-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe and found 5/8" rod bent west on surface Found no further evidence of corner. Reset iron rod.

1995 Jones Haugh and Smith crew set a cast iron monument over the iron rod found in 1994.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 33, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1979 (DATE) found a brass plug 2 feet north of E¼ corner

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1979 (DATE) placed a 5/8" cast iron monument 2 feet south of brass plug.

SKETCH OF REFERENCE TIES

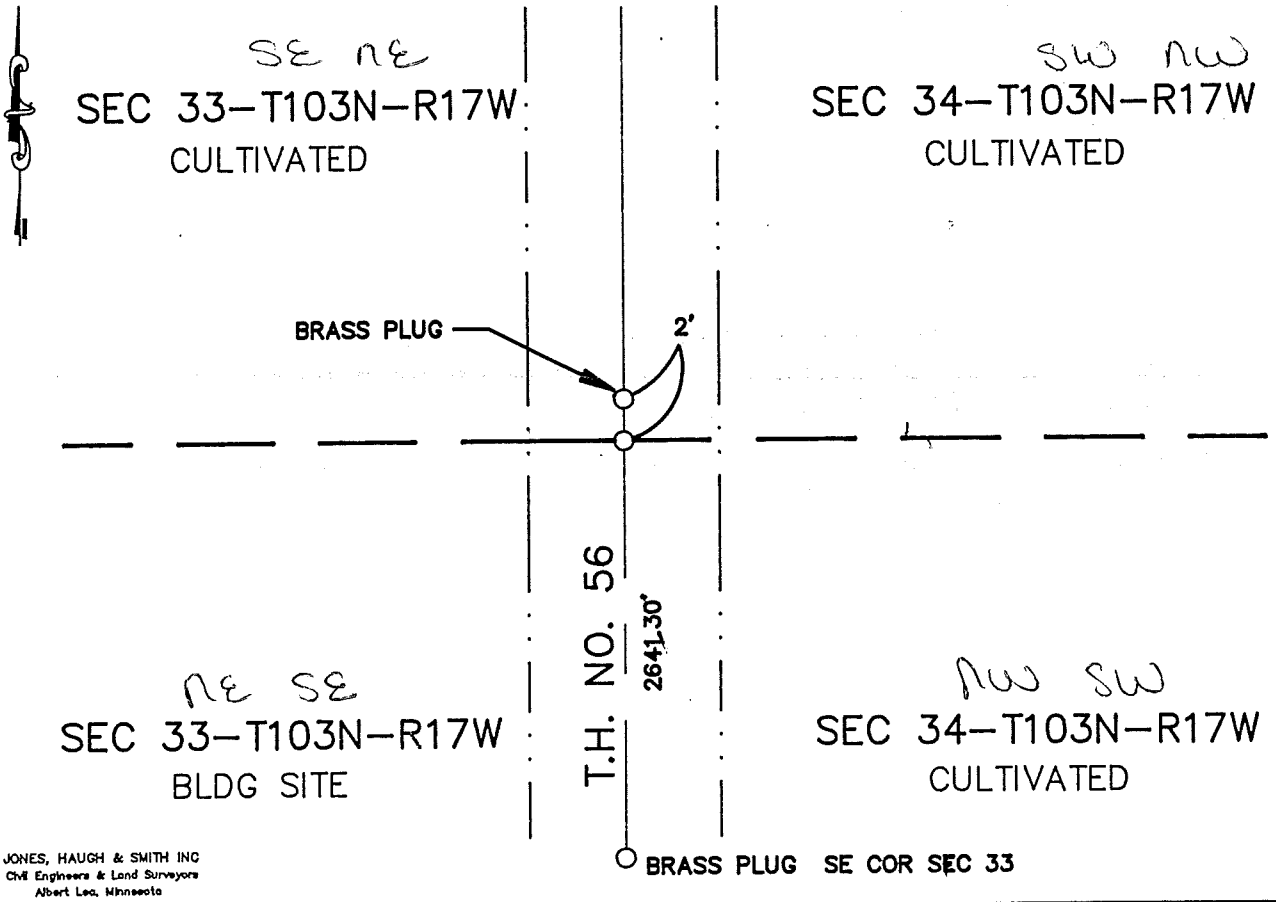

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447784

M.H.D. FORM NO. 2105 BOOK 92 PAGE 397 Book 92 Misc Page 397

E 1/4 Cor SEC 33-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

TH. No. 56 R/W map shows a position for this corner.

1979 Jones Haugh and Smith crew located a brass plug 2643.30' north of brass plug at SE corner section 33 and set a 5/8" iron 2' south of brass plug Mower County Highway Department station distance of 2641.3' north of SE corner.

1989 Jones Haugh and Smith crew located a 5/8" iron 2' south of brass plug on CL.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner 2641.3' north of brass plug at SE corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 33, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/04/1996 (DATE) found a BRASS PLUG

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

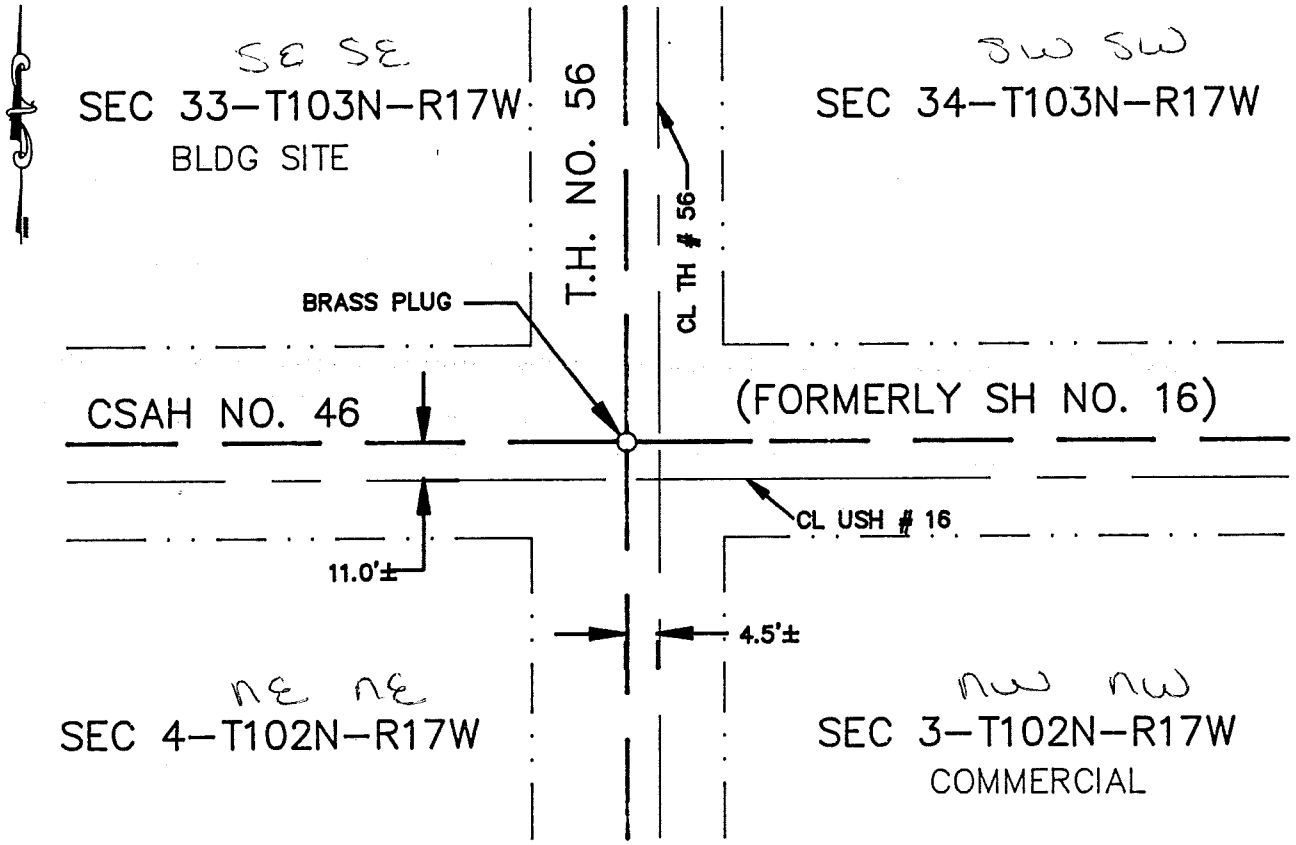

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447783

M.H.D. FORM NO. 2105 BOOK 92 PAGE 395 Book 92 Misc Page 395

SE Cor SEC 33-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

MNDOT TH No. 56 R/W map shows a brass plug 11' north of CL TH No. 16 and 4.5' west of CL SH No. 56.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a brass plug that is in accordance with MHD SH No. 56 and SH No. 16 HWY plans, 11' north and 4.5' west of the CL CL intersection TH 56 and TH 16.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 35, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1994 (DATE) found a 3/4" IRON, 2" WOOD STAKE AND PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

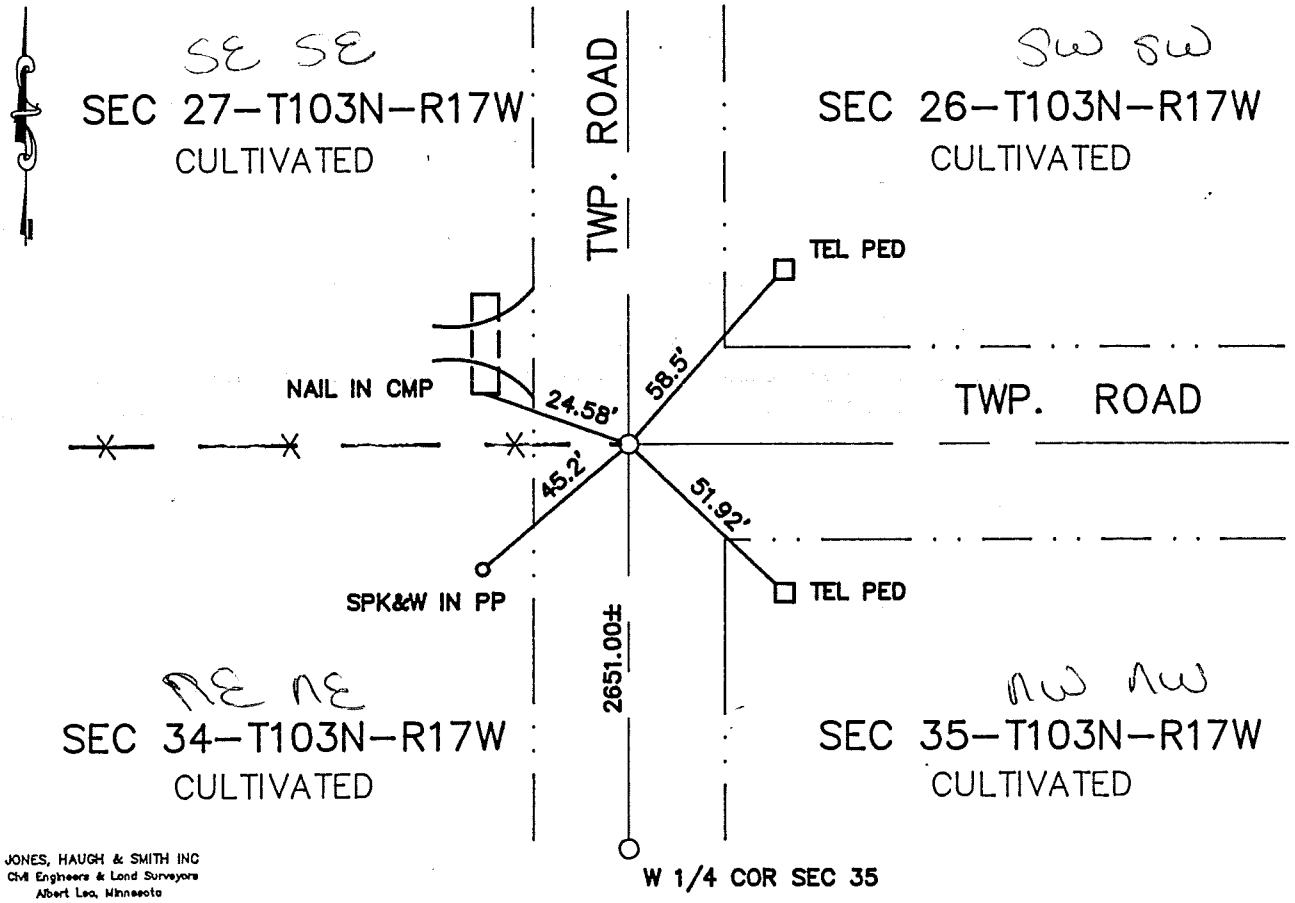

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447786

M.H.D. FORM NO. 2105 BOOK 92 PAGE 401 Book 92 Misc Page 401

NW Cor SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the location of 3/4" iron on road surface on the CL of township road N-S and east. Uncovered a 2" wood stake and pipe on the SW side of the wood stake. Wood stake and pipe were 2.6' south of the 3/4" iron on the road surface. Placed a cast iron monument over the wood stake 0.5"+- below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1994 (DATE) found a 5/8" IRON, BOATSPIKE, 2X2 HUB

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

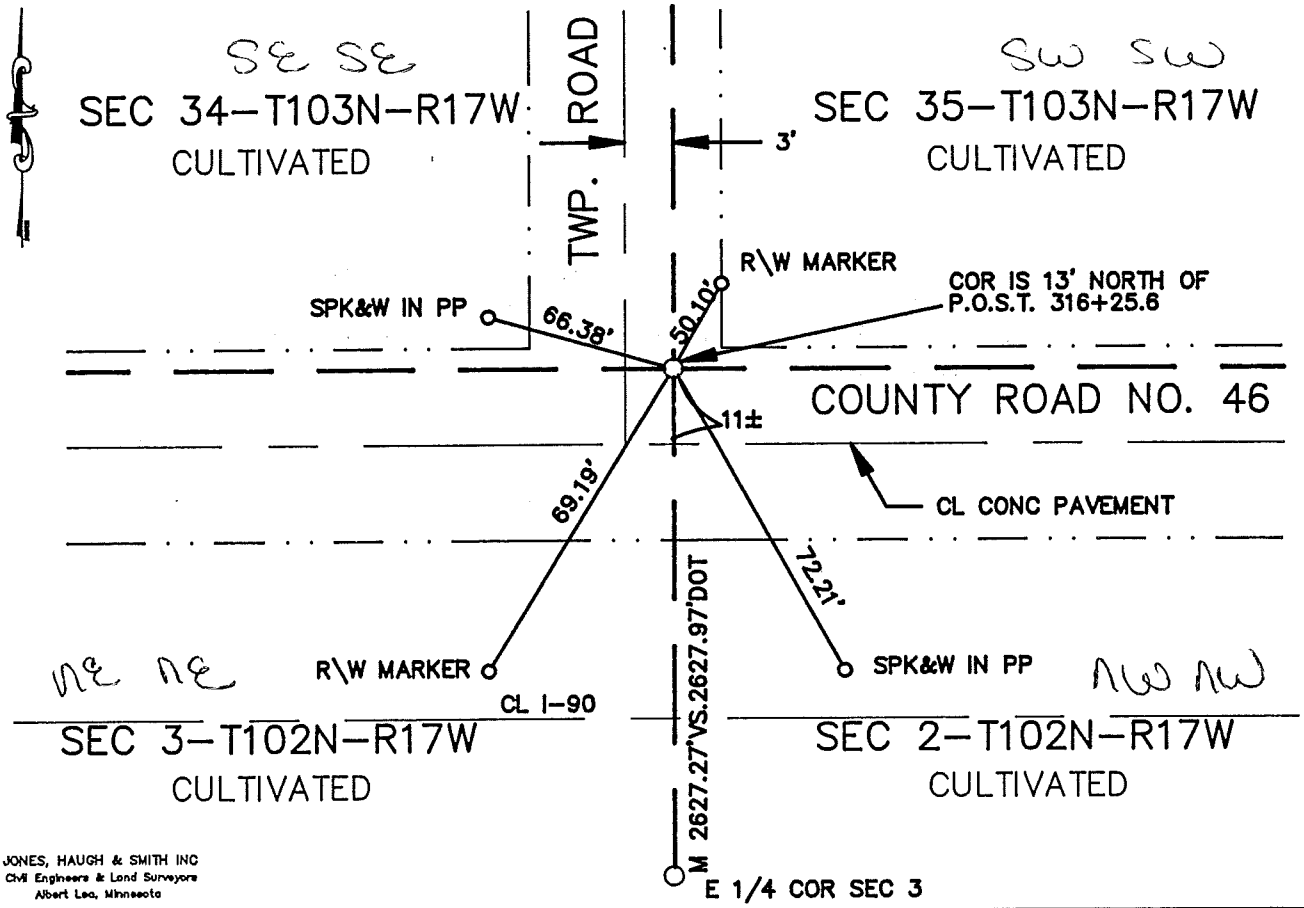

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-10-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Evans

By Susan M. Davis, Deputy

DOCUMENT NO. 447785

M.H.D. FORM NO. 2105 BOOK 92 PAGE 399

Book 92 Misc Page 399

SW Cor SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

MN DOT I-90 R/W map shows a 2"x2' wood hub 2.5' below the road surface with a iron spike over it and a distance of 341.40' south to CL Tang. west bound lane I-90.

1930+- TH # 16 R/W map shows the location for this corner as being 13' north of P.O.S.T. 316+25.6

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 11' north of CL of Co. Rd. 46 and 2' east of CL of township road north. Uncovered a 5/8" iron, a boat spike, and a 2"x2' wood hub. In agreement with TH #16 and I-90 R/W map locations, placed a cast iron monument inplace of wood hub.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 35, Township T103N Range R17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-9-94 (DATE) found a 1" PIPE 2"BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 6-9-94 (DATE) placed a CASTIRON MON.

SKETCH OF REFERENCE TIES

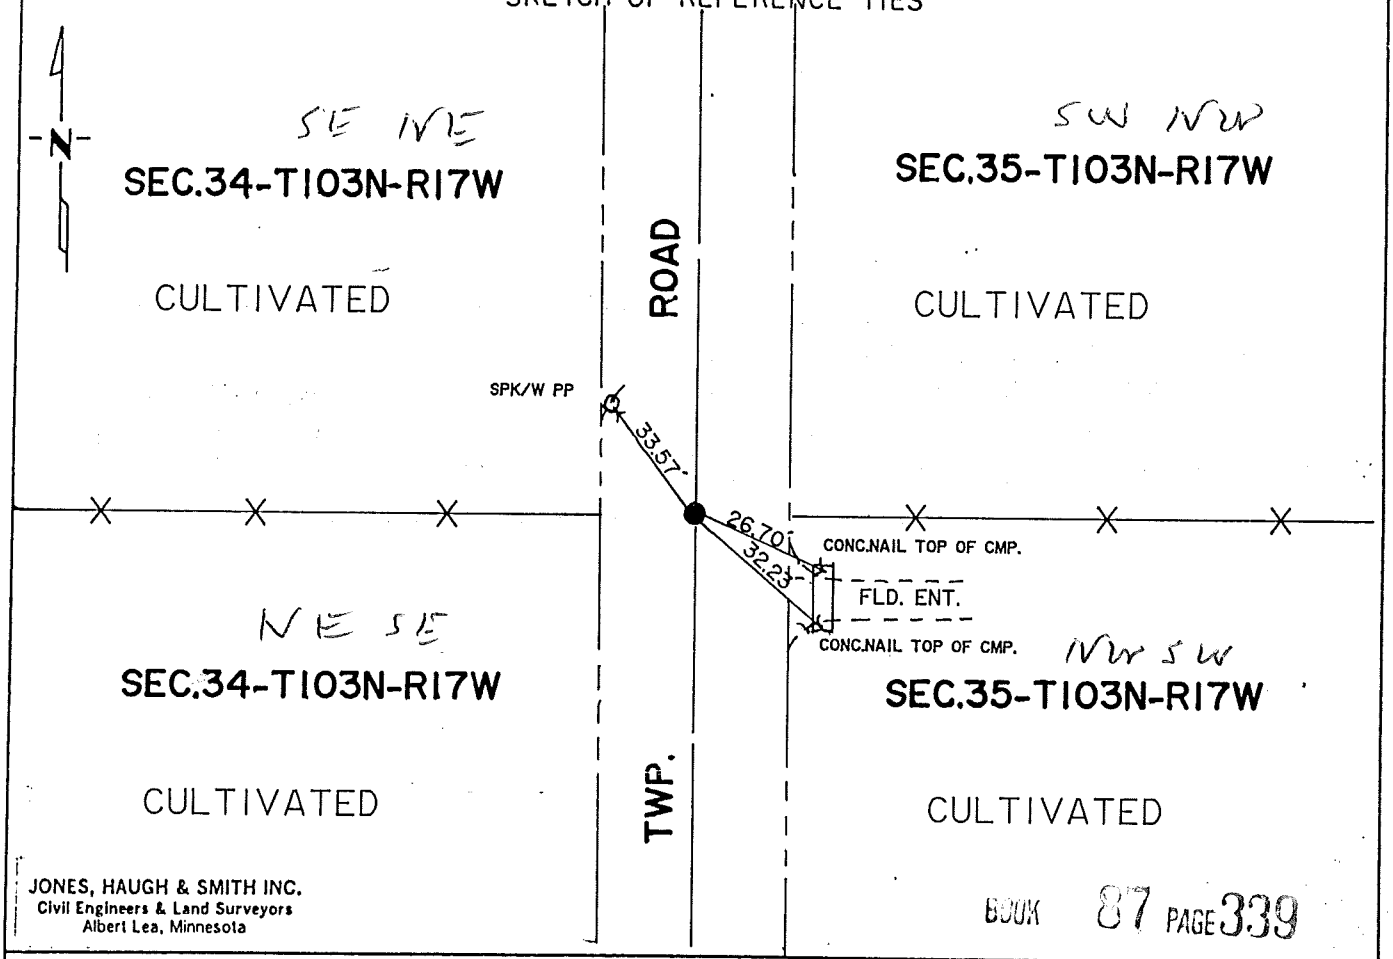

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 339

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437347

Book 87 Misc Page 339

M.H.D. FORM NO. 2105

W 1/4 SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Engineering Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under the direction of John Schulte, Mower Co. Surveyor, RLS 13807, dug with county backhoe on CL N-S twp. road in line with a fence lines to the east and west. A 1" pipe was found 2' below the road surface. Continued digging but no further evidence was found. Accepted pipe as best evidence of original corner and set CIM near road surface. The corner is in line with road centerline N-S and with the fence lines to the east and west.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/28/1997 (DATE) found a IRON CAPPED 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/28/1997 (DATE) placed a –

SKETCH OF REFERENCE TIES

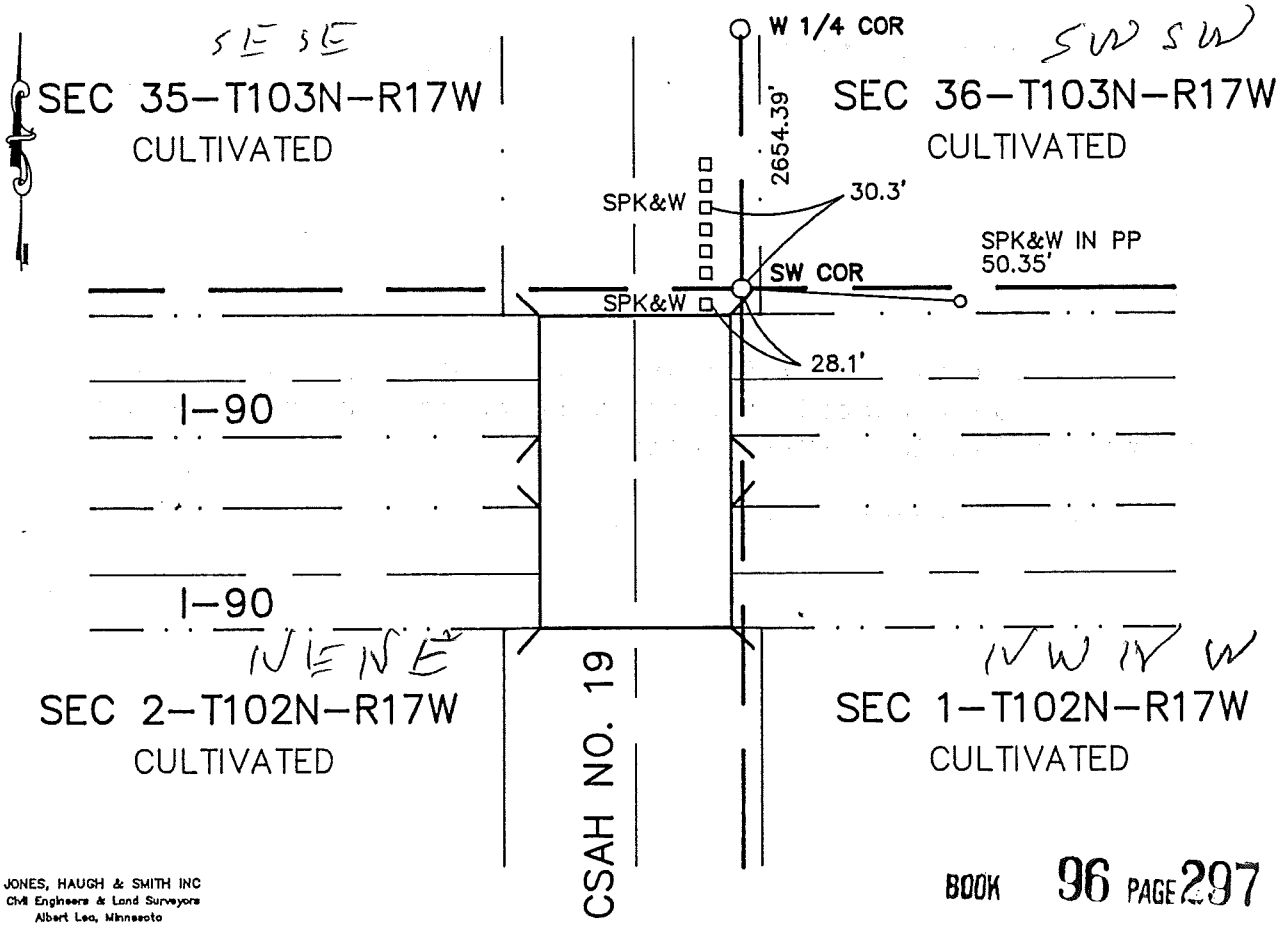

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 297

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456003

M.H.D. FORM NO. 2105

Book 96 Misc Page 297

SW Cor SEC 36-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand 2654.39' south of W 1/4 corner of section 36. Located a capped 15471 iron at this location. Iron is in agreement with I-90 R/W map and TH No. 16 R/W plans. Accepted iron at a perpetuation of original PLS corner and tied it off.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 12" iron over a 1/2"Ø x 24" iron on the south side of a pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument over pointed stone.

SKETCH OF REFERENCE TIES

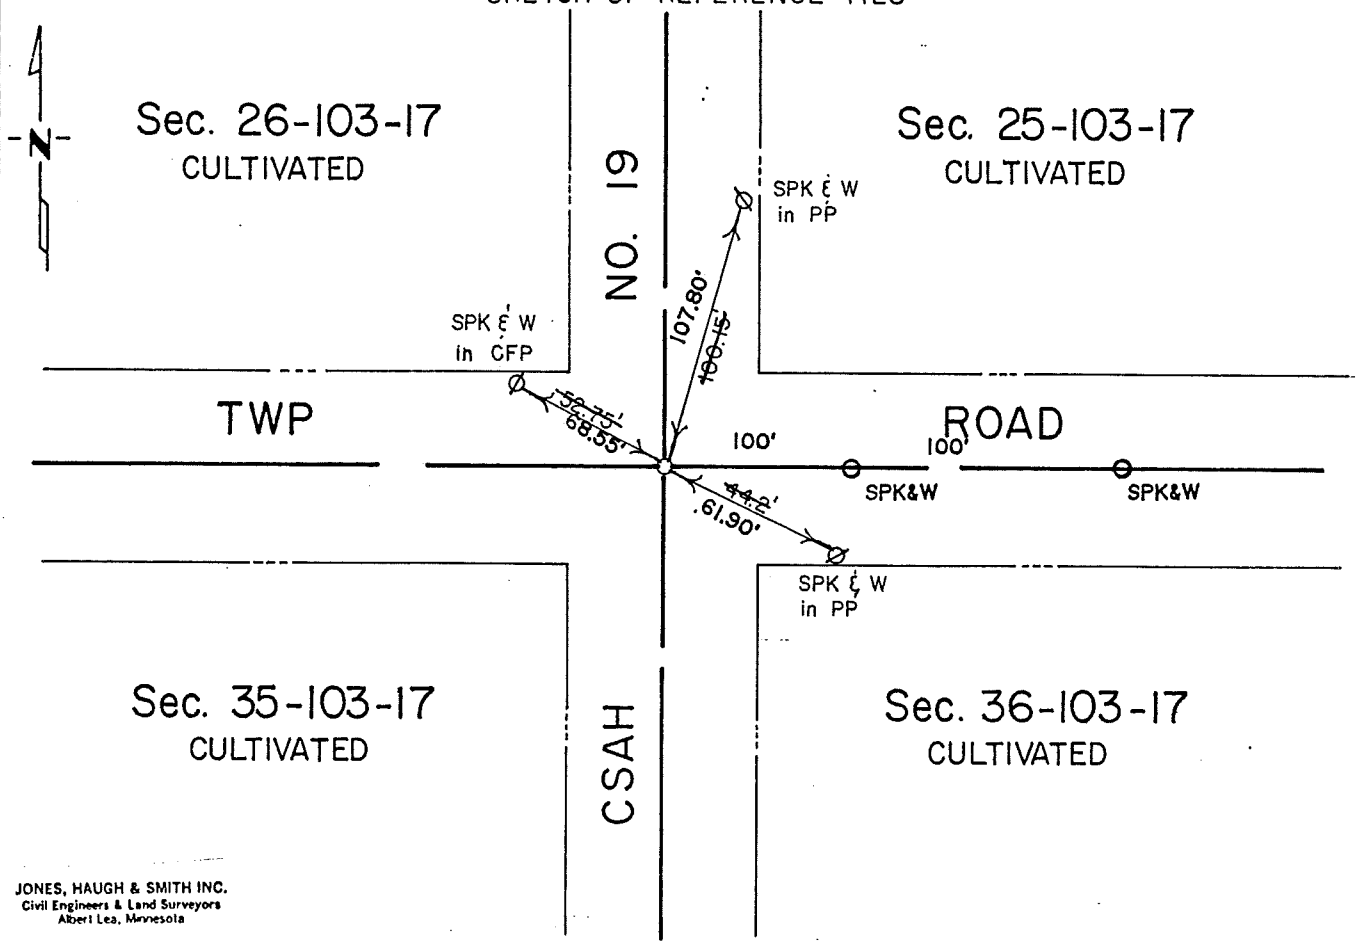

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Recorded in "A" in the office of the County Engineer it shows a 1 1/4 inch iron bar on the north side of a stone and ties were taken.

1986 Ray Tucker, RLS 15471, uncovered a 1 1/4 inch iron on the west side of the stake. The monument was left as found and a stone was set with a 1/2 inch diameter iron re-bar over stake capped RLS 15471.

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar on the south side of a pointed nigger head and the remains of the old wood stake was found around a 1/2" diameter iron. Left the monument as found and set a cast iron monument over a 1/2" diameter iron on the surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 5-29-91 (DATE) found a 3/4"Ø x 12" iron over a 1/2"Ø x 24" iron on the south side of a pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-29-91 (DATE) placed a cast iron monument over pointed stone.

SKETCH OF REFERENCE TIES

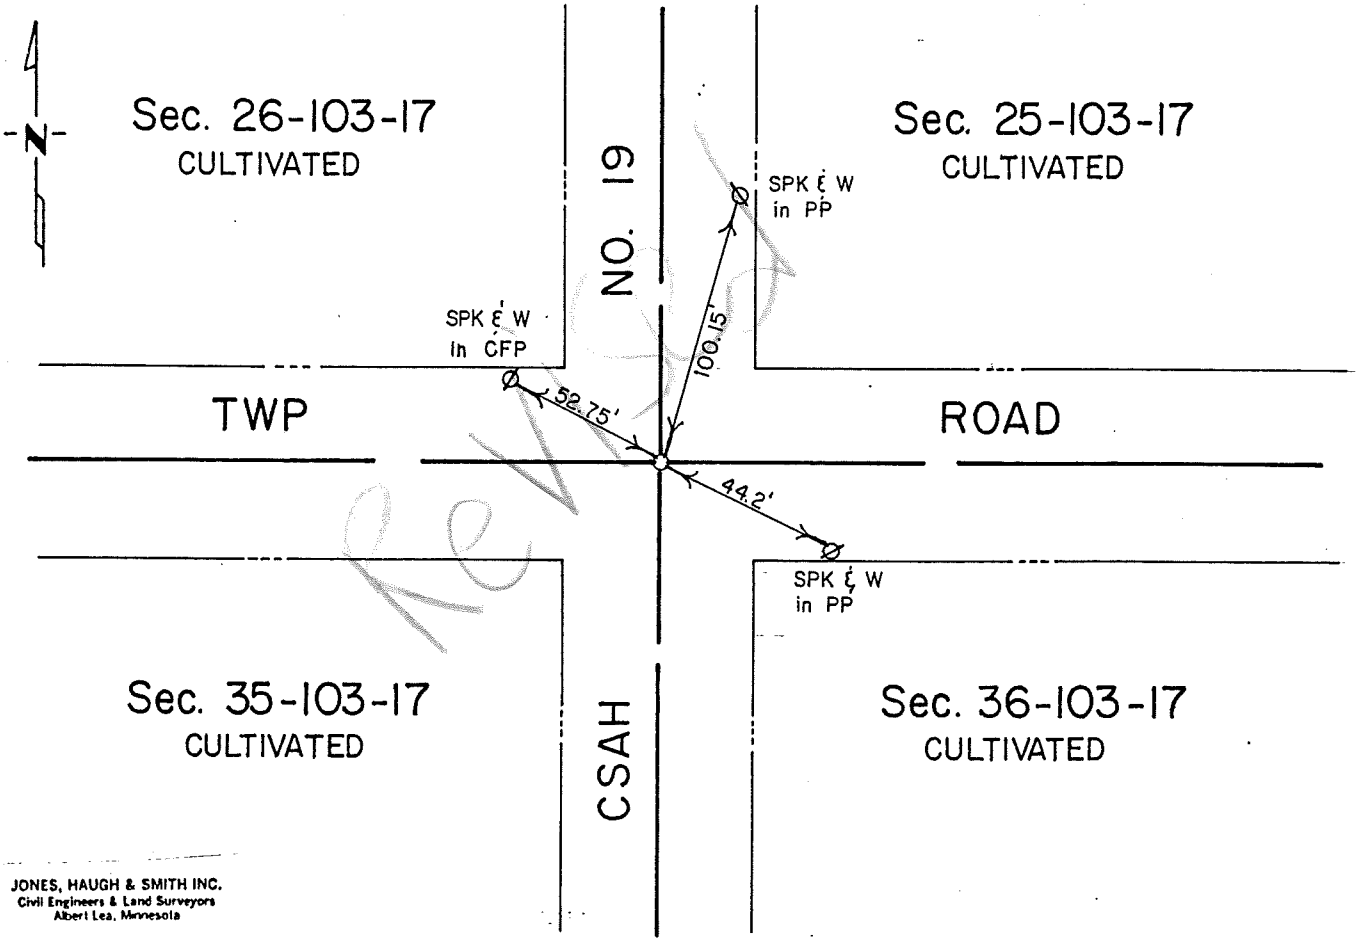

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Recorded in "A" in the office of the County Engineer it shows a 1 1/4 inch iron bar on the north side of a stone and ties were taken.

1986 Ray Tucker, RLS 15471, uncovered a 1 1/4 inch iron on the west side of the stake. The monument was left as found and a stone was set with a 1/2 inch diameter iron re-bar over stake capped RLS 15471.

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar on the south side of a pointed nigger head and the remains of the old wood stake was found around a 1/2" diameter iron. Left the monument as found and set a cast iron monument over a 1/2" diameter iron on the surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" re-bar 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

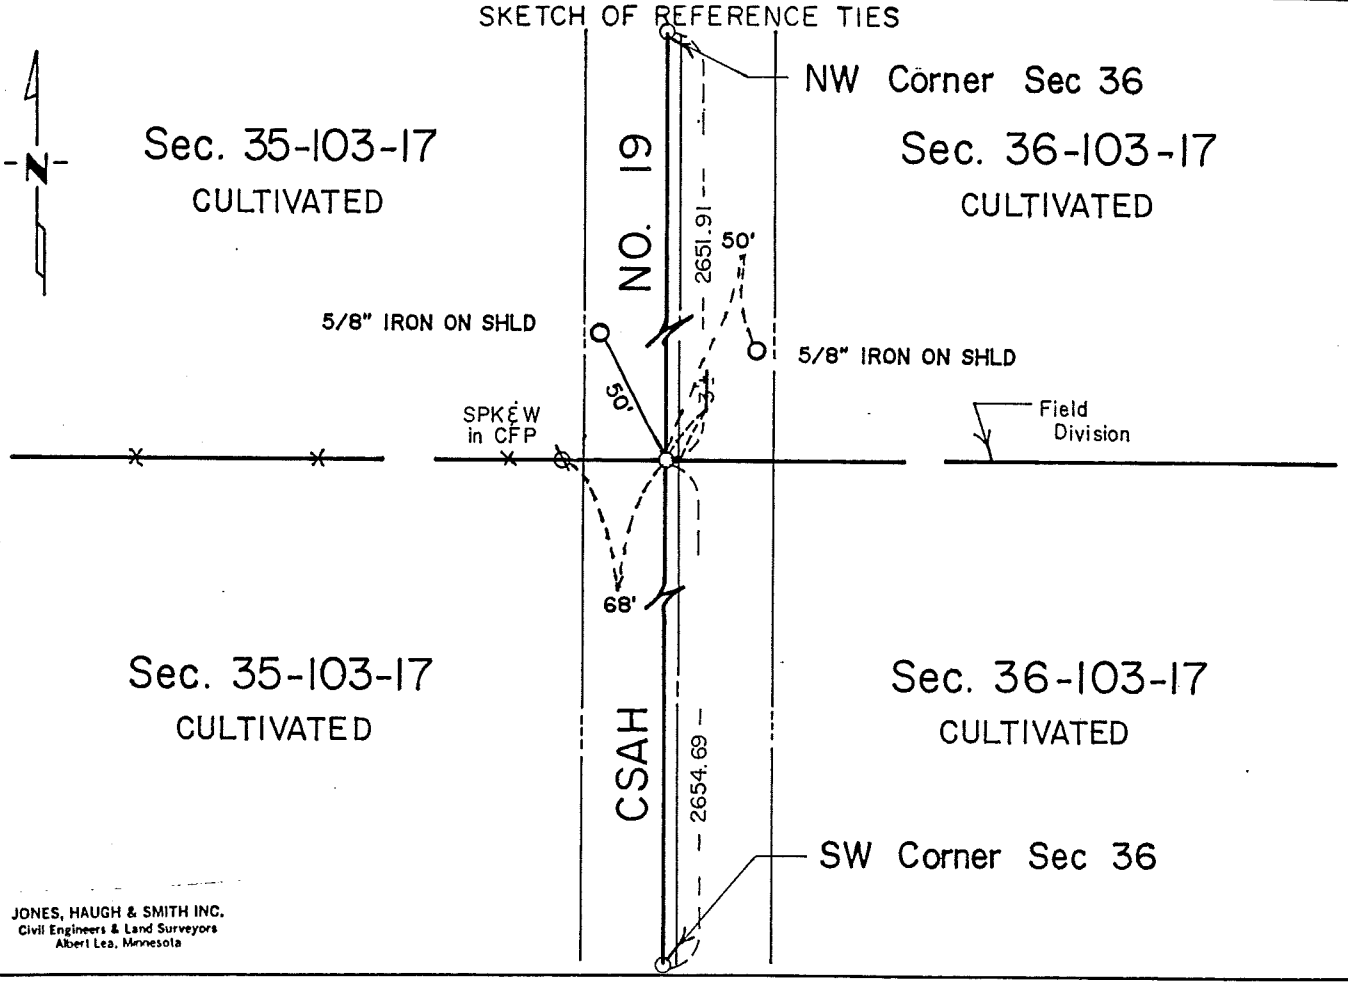

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 6-7-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1985 Ray Tucker, RLS 15471, uncovered a 3/4 inch diameter iron 4 feet, more or less, west of centerline of N-S road and reset 1/2" diameter x 24" iron capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:
28.25' West to spk in fence post
75.0' West to 3/4" diameter iron
33.0' East to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar, continued digging and found no further evidence of a public land survey corner. Assumed any perpetuation of corner would have been destroyed in 1985 by Tuckers excavation. Therefore accepted 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

1997 Re-set

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 36, Township 103N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-91 (DATE) found a 1/2"Ø x 24" re-bar 0.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

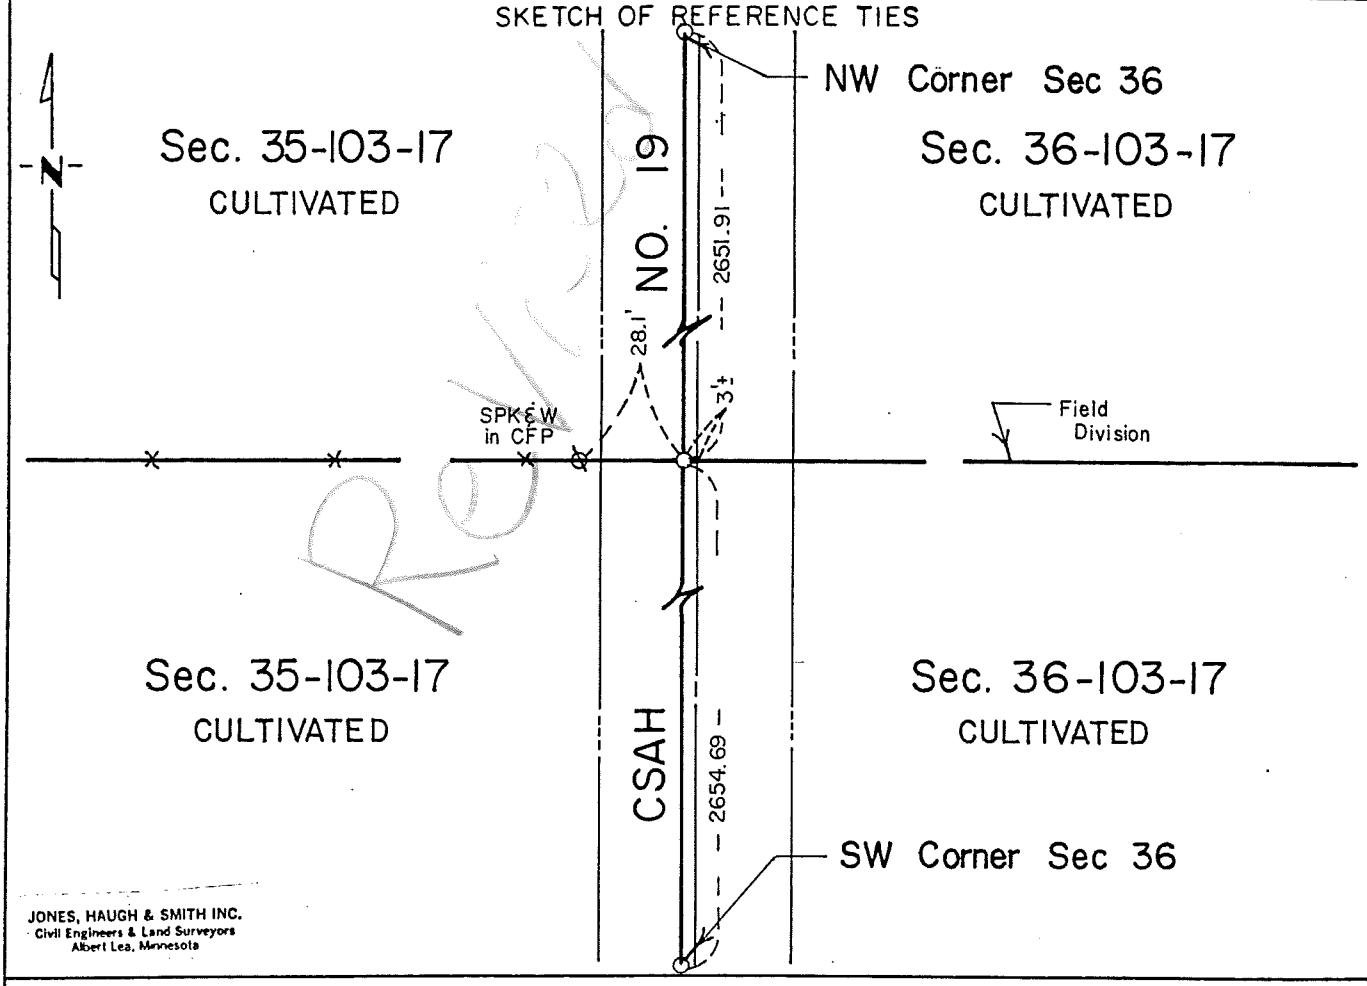

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-7-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1985 Ray Tucker, RLS 15471, uncovered a 3/4 inch diameter iron 4 feet, more or less, west of centerline of N-S road and reset 1/2" diameter x 24" iron capped RLS 15471 and the following ties were taken and recorded in Book "A" in the office of the County Engineer:
28.25' West to spk in fence post
75.0' West to 3/4" diameter iron
33.0' East to 3/4" diameter iron

1991 Jones, Haugh & Smith Inc dug with the County backhoe for grading project SAP 50-619-15 and uncovered a 3/4 inch diameter iron over a 1/2" X 24" iron re-bar, continued digging and found no further evidence of a public land survey corner. Assumed any perpetuation of corner would have been destroyed in 1985 by Tuckers excavation. Therefore accepted 1/2" diameter iron and set a cast iron monument at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.