Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-8-81 (DATE) found a ½" ø (2.5' deep) in concrete in 4" clay tile over iron by stone & old fence post 3.5' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-8-81 (DATE) placed a 5/8" ø iron (capped #13807) over monuments found.

SKETCH OF REFERENCE TIES

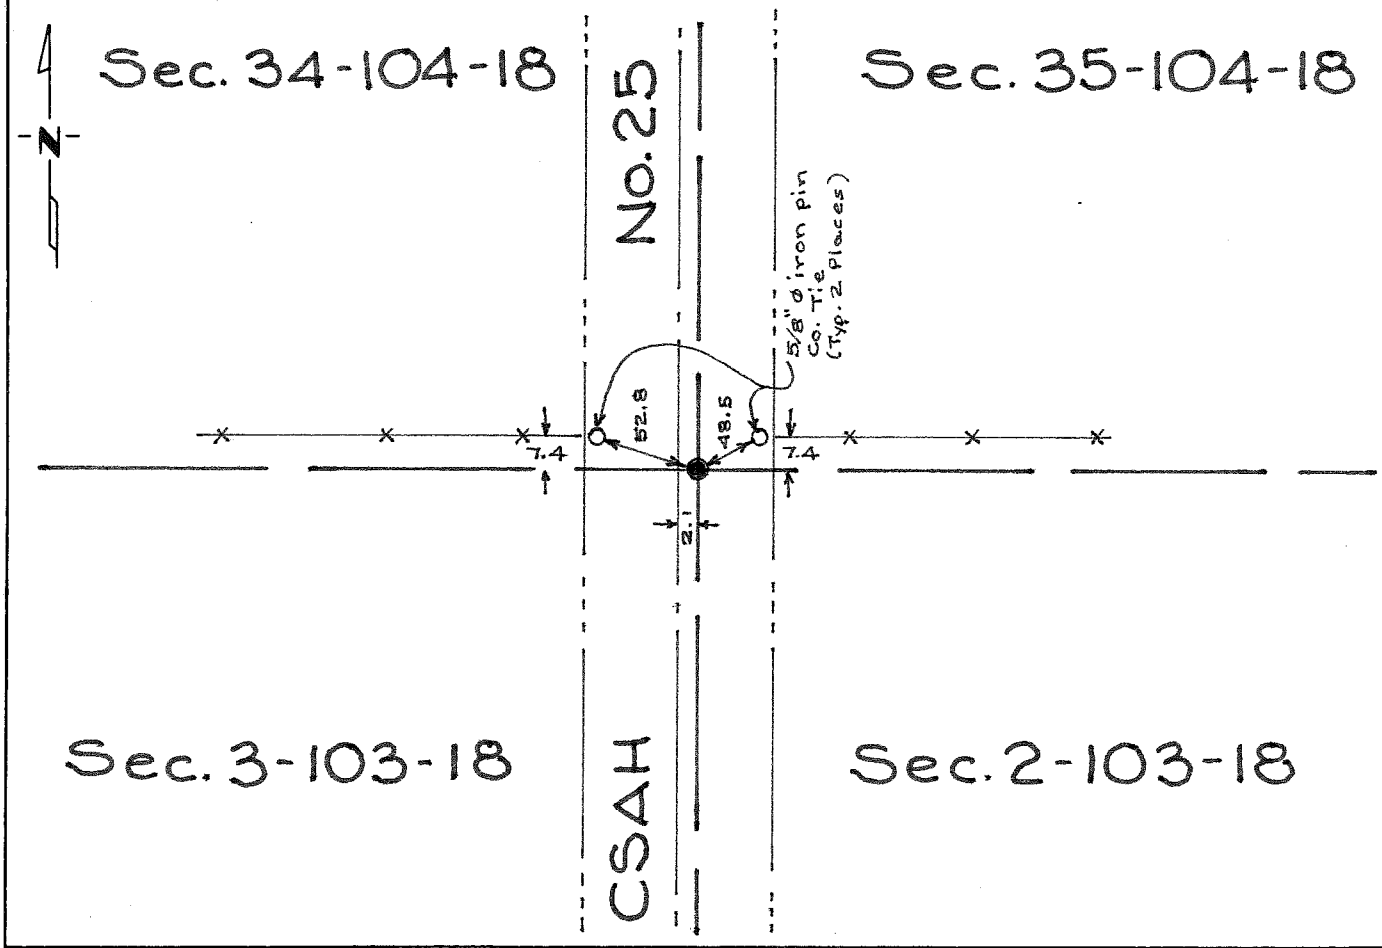

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-12-88 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SW corner Section ~~36~~ 35-104-18

This corner was originally established by Deputy Surveyor John Ball of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and made a mound of earth with trench.

The following were contacted for section corner information:

Mower County Engineering Department

The record book in the office of the Mower County Engineer indicates a stone was found and ties were taken.

County grading plan shows an iron monument was found during road grading project.

1981 Jones, Haugh & Smith crew dug with County backhoe at location of good signal with metal locator and uncovered a ½" diameter iron in a 4" diameter clay tile over an iron on the side of a field stone with a wood post on the north side of the stone. Reset clay tile with ½" diameter iron and placed a 5/8" diameter iron over it on road surface.

The monuments found agree with past record and fits occupation within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith