Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-89 (DATE) found a SQUARE HEAD BOLT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-89 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

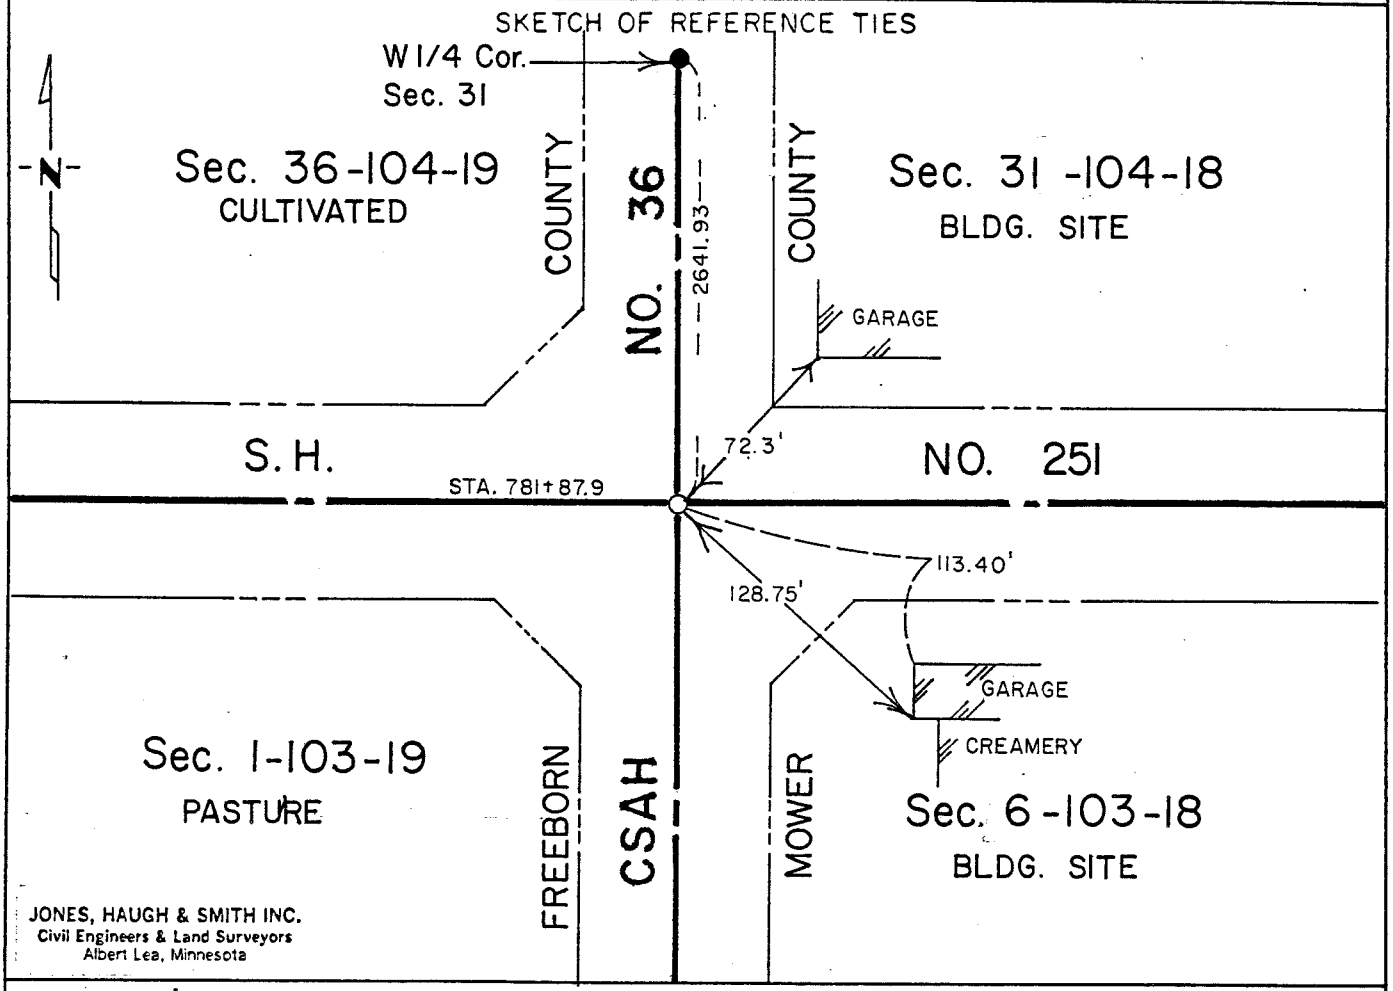

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-29-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 75° W	143 links (94.38 ft)
14" Burr Oak	S 26° E	275 links (181.50 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, Mower County Surveyor, notes show a government post inplace.

1944 John Nielsen, Freeborn County Surveyor uncovered a wood stake with a bolt in center. The following ties were taken:

SW corner of garage	72.4' NE
NW corner of Creamery	129.0' SE
NE corner concrete platform	178.5' SSE

1954 C.V. Jones Engineering notes show a square head bolt inplace. The following ties were taken:

SW corner garage	72.3' NE
NW corner of Creamery	128.75' SE

1982 Jones, Haugh & Smith Inc crew uncovered a 3/4" diameter iron for a survey in the NE 1/4 Section 6-103-18.

1989 SAR No. 1 construction survey shows a wood stake with a bolt in center at this location. Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn County Surveyor, placed a cast iron monument on centerline centerline of north-south-east-west roads at location of bolt found.

The monument found fits occupation and road centerlines within the section and is in agreement with past records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.