Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found nothing

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a Cast iron monument at intersection of fence N-S and county road centerline

SKETCH OF REFERENCE TIES

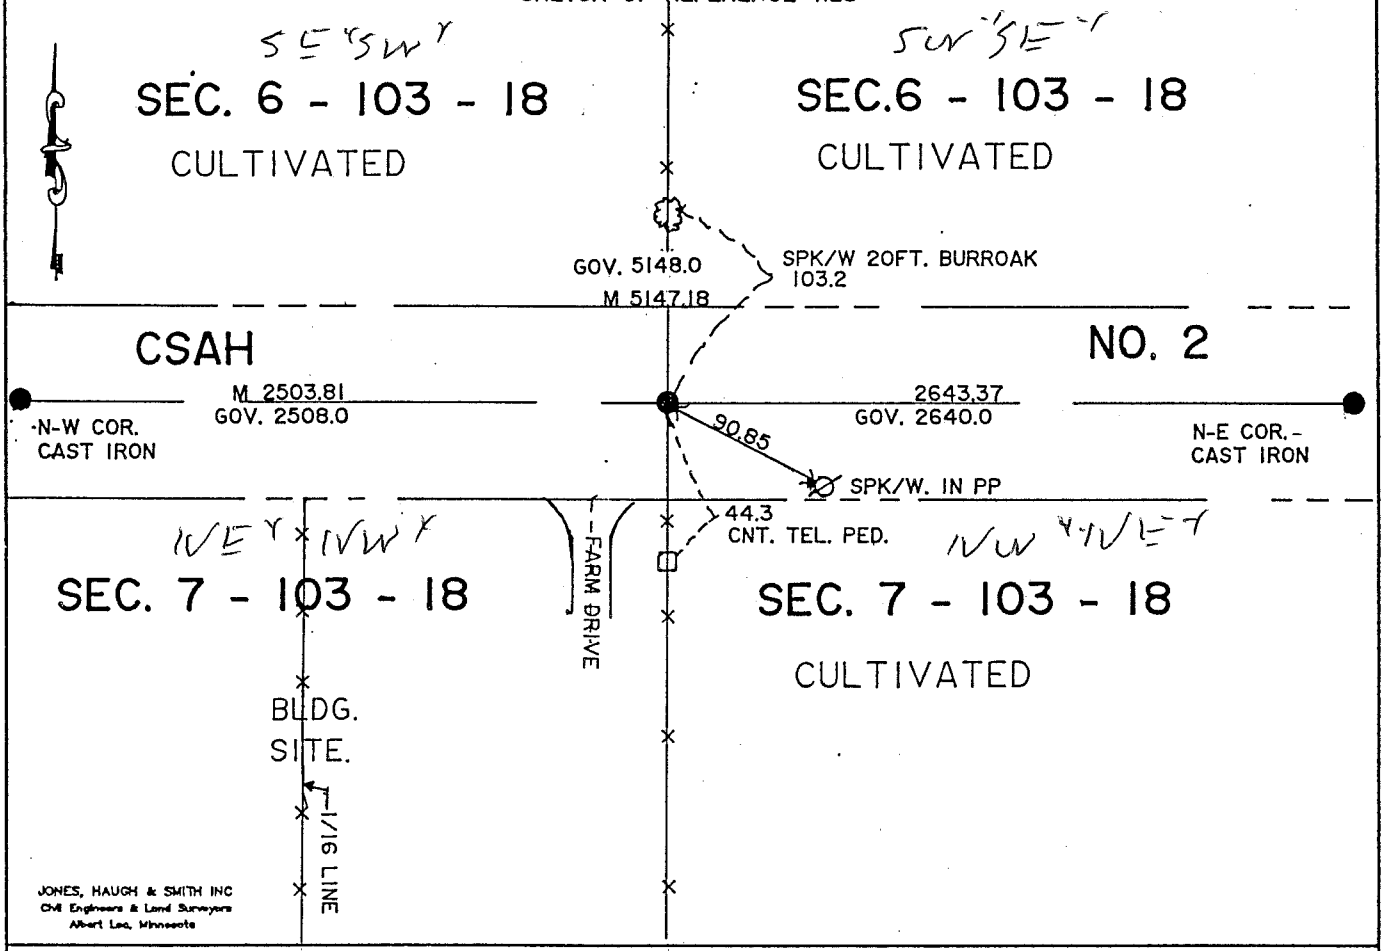

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Engan

By Marlene Manton, Deputy

DOCUMENT NO. 430121

Book 83 Misc Pg 483

M.H.D. FORM NO. 2105

BOOK 83 PAGE 483

STATEMENT OF EVIDENCE

N 1/4 cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

16" Burr Oak	S 12°30' E	67 links (44.22 feet)
14" Burr Oak	N 68° W	60 links (39.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1885 Clausen field notes show a government post at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found no evidence of the original public land survey corner.

The location of the intersection of the fence lines north and south and county road centerline agrees with the 1/16th line fence in the NW 1/4. The position also agrees with the distance found by Clausen on the north line of the NW 1/4.

The intersection of occupation lines are accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 484