Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

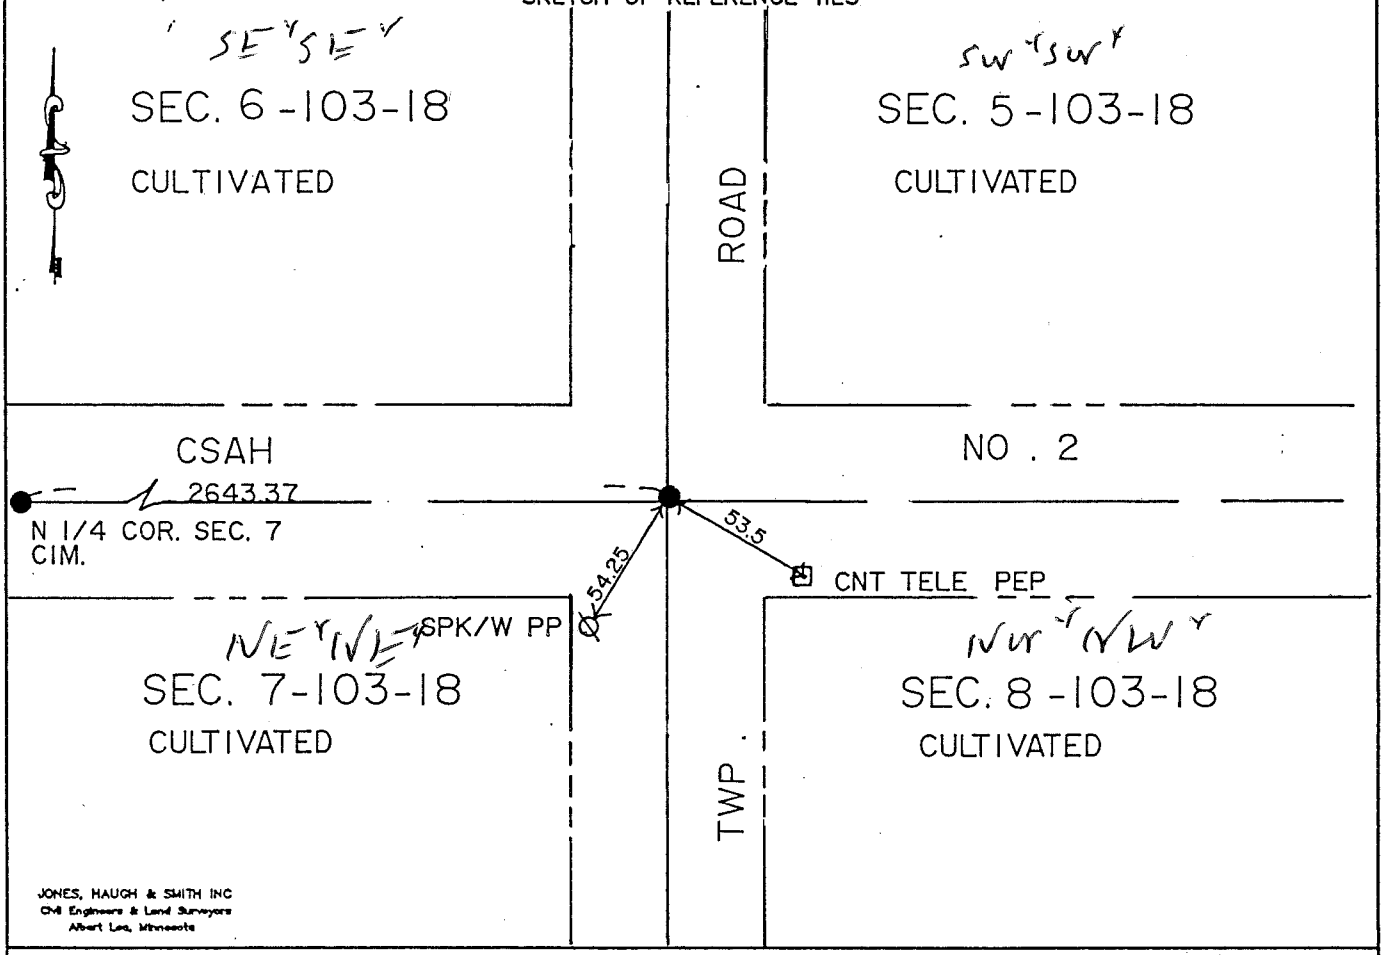

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

BOOK 83 PAGE 481

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 400120

Book 83 Misc Page 481

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

8" Burr Oak	S 71° W	785 links (518.1 feet)
10" Burr Oak	S 12° E	360 links (237.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1945 Mower County Highway Department grading plans show concrete monument inplace.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found the concrete monument over a 4" diameter wood post.

The concrete monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 482