Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Øx12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

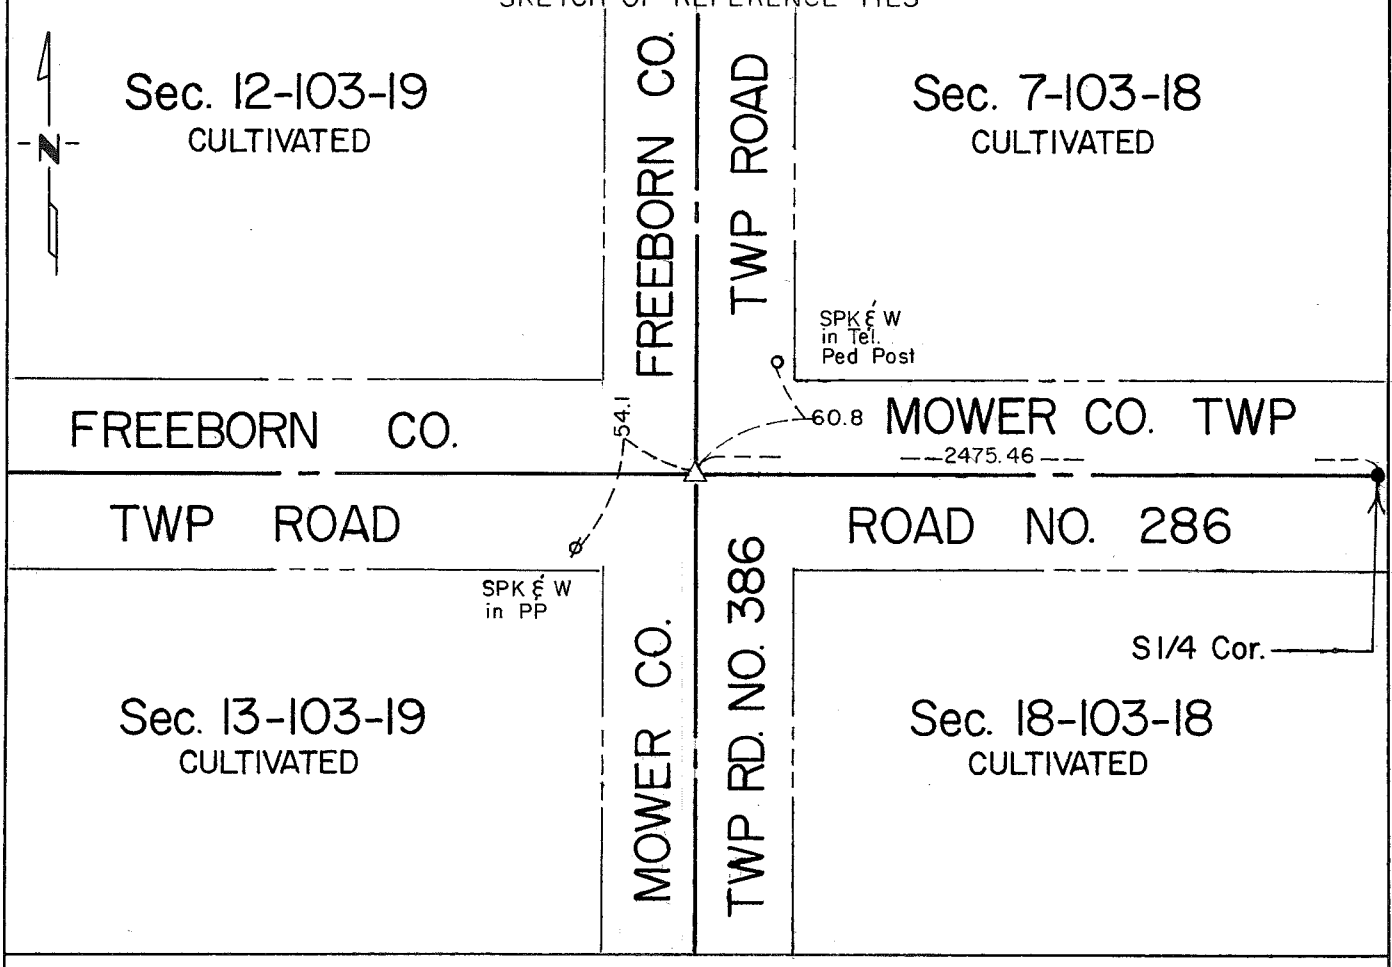


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-18-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

| | | | | |
|---|---|---|---|---|
| 10" | Burr Oak | N 35° W | 88 links | (58.08 feet) |
| 10" | Burr Oak | N 43° E | 79 links | (52.14 feet) |
| 12" | Burr Oak | S 88° E | 78 links | (51.48 feet) |
| 10" | Burr Oak | S 37° W | 158 links | (104.28 feet) |

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

| | | |
|---|---|---|
| Spk & W in Power pole | 40.7 | SE |
| Spk & W in Telephone pole | 73.8 | ENE |
| NE cor of school house (porch) | 101.1 | WSW |
| SE cor of school house (Main Bldg) | 117.7 | SW |

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

SW COR SEC 7 T103N - R18W
NW COR. SEC. 18 T103N - R18W

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 103N, Range 19W, 5th P.M.

STATE OF MINNESOTA, County of FREEBORN


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Ø x 12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

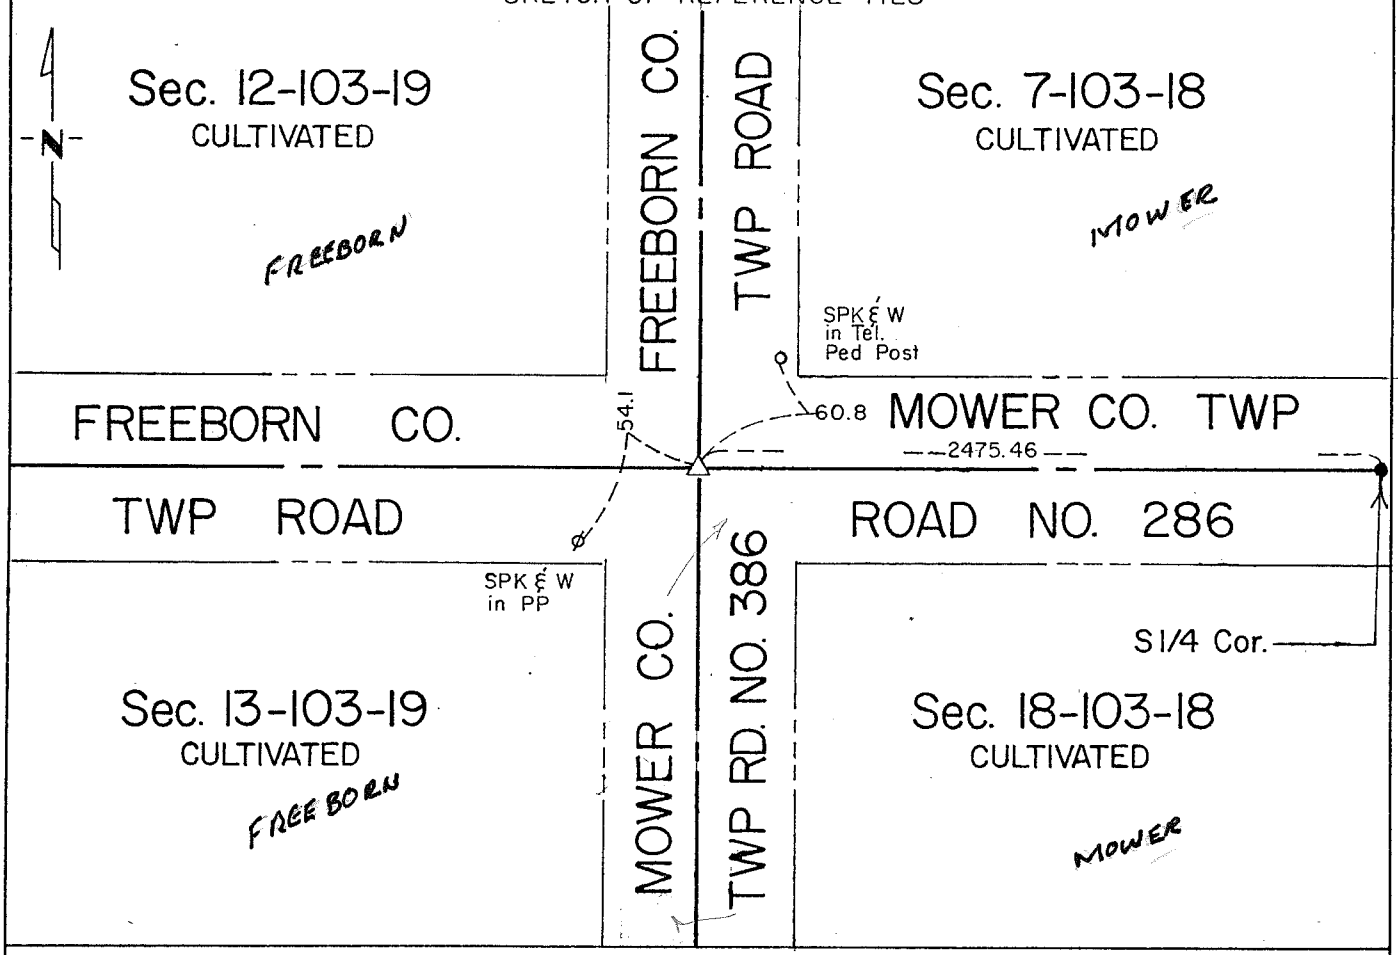


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 13-103-19

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

| | | | | |
|---|---|---|---|---|
| 10" | Burr Oak | N 35° W | 88 links | (58.08 feet) |
| 10" | Burr Oak | N 43° E | 79 links | (52.14 feet) |
| 12" | Burr Oak | S 88° E | 78 links | (51.48 feet) |
| 10" | Burr Oak | S 37° W | 158 links | (104.28 feet) |

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

| | | |
|---|---|---|
| Spk & W in Power pole | 40.7 | SE |
| Spk & W in Telephone pole | 73.8 | ENE |
| NE cor of school house (porch) | 101.1 | WSW |
| SE cor of school house (Main Bldg) | 117.7 | SW |

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.