TIE BOOK p. 100 Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 15, 1978 (DATE) placed a RAILROAD SPIKE WITH PUNCH HOLE.

SKETCH OF REFERENCE TIES

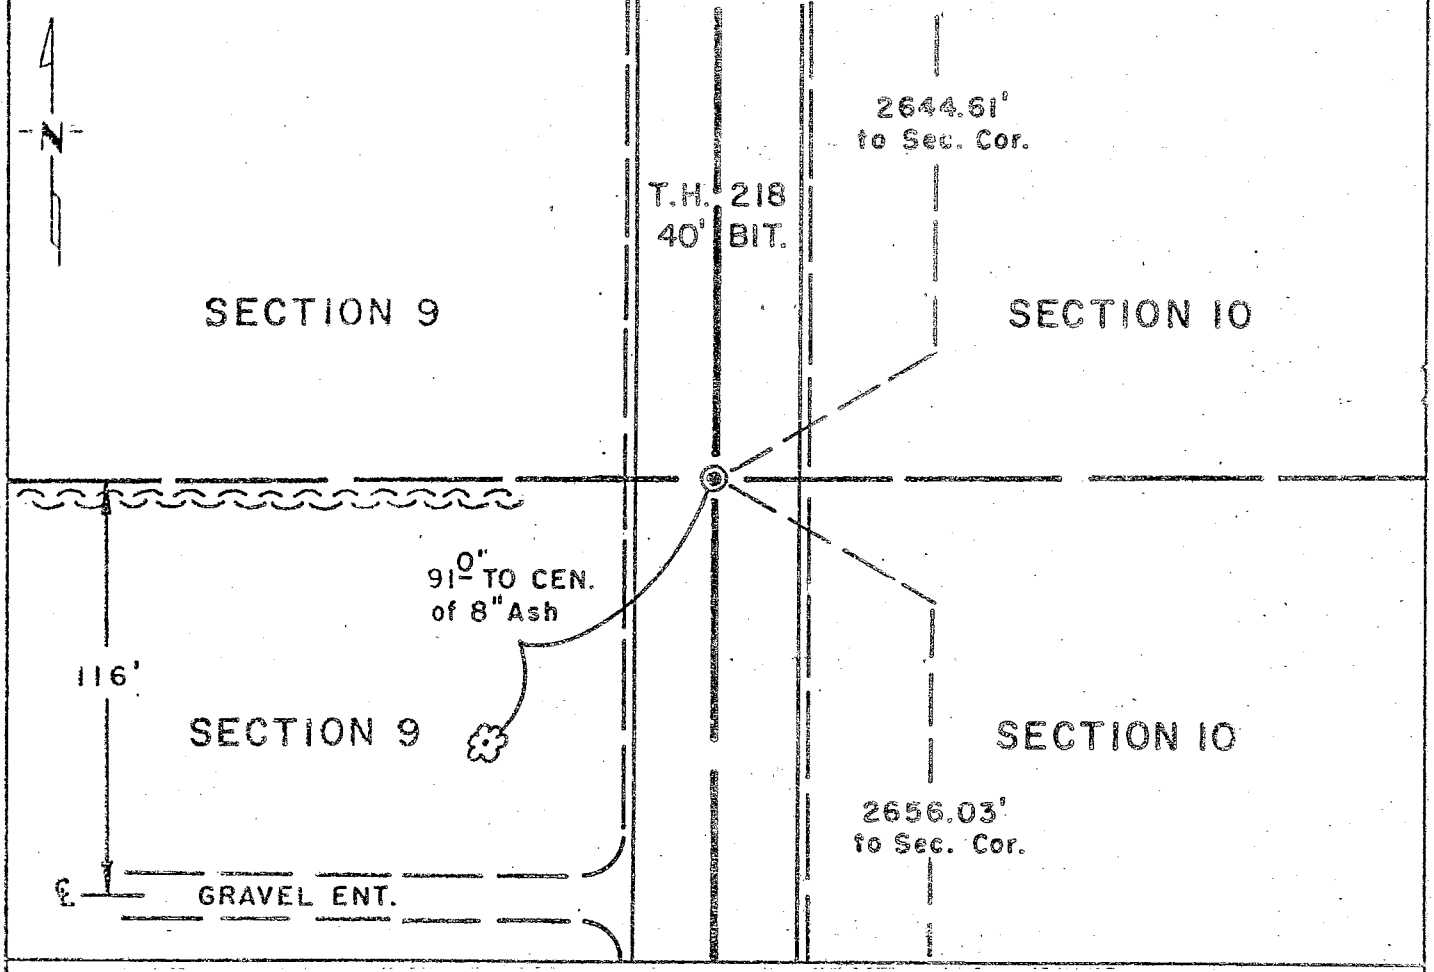


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336625
Book 47 of Misc. Page 171

MHD FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER SECTION 9, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the original Public Land Survey.

1926 — Minnesota Highway Department referenced an east-west fence to a centerline P.O.T. by station and angle.

MAY,6, 1953 — L. H. Edison, Land Surveyor, used this corner for a plat recorded in Book of Plats, page 15 in the County Recorders Office.

An analysis of the record and survey data indicates that the monumented north line of the recorded plat is in agreement with the 1926 occupation lines. The corner was set at the intersection of the monumented plat line and the centerline of T.H. 218 and is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transporation, Surveying and Mapping Section, Rochester District Office.