Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/2002 (DATE) placed a 5/8" X 16" IRON CAPPED

SKETCH OF REFERENCE TIES

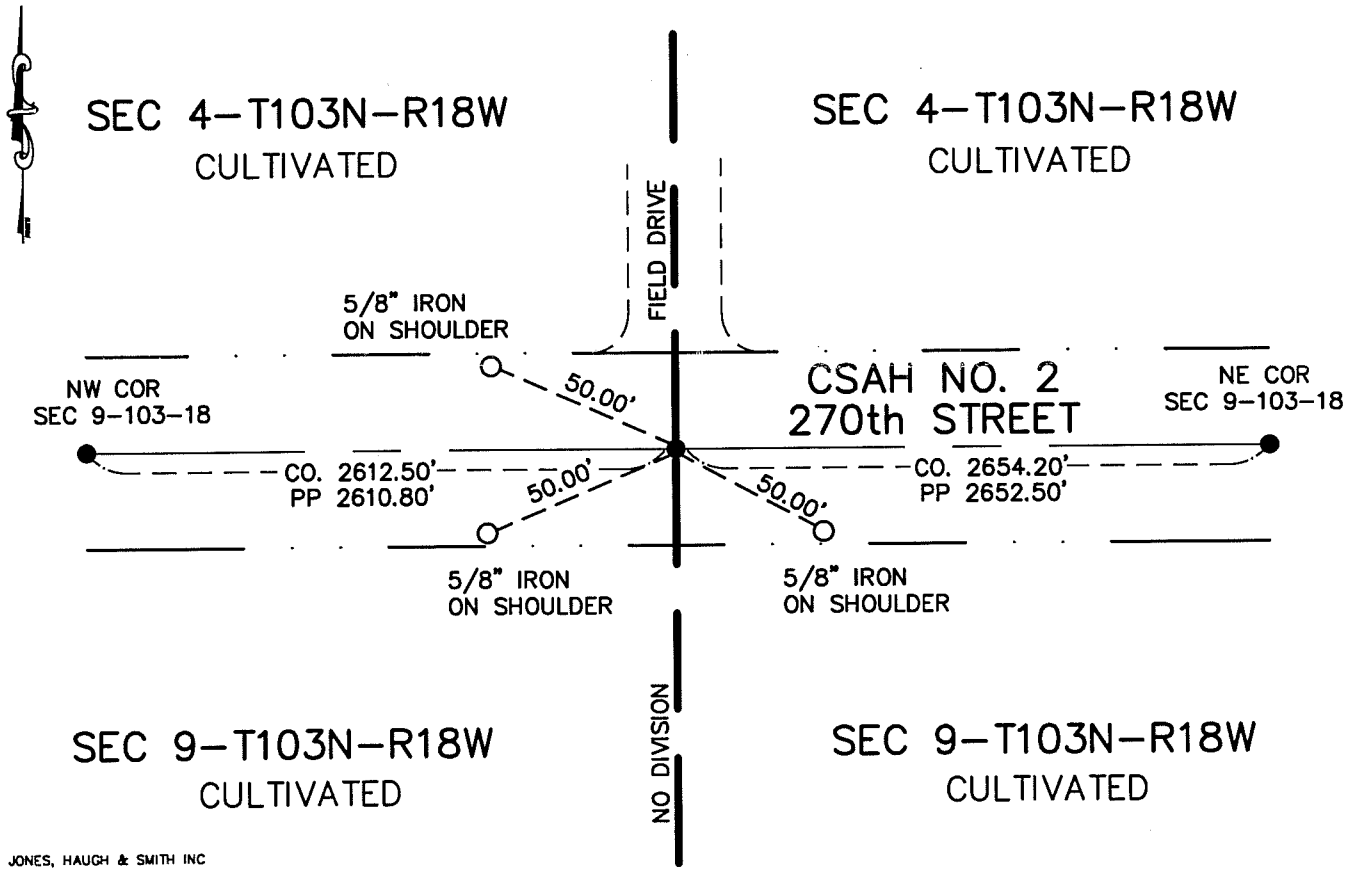

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-1-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

N1/4 Cor Sec 9-103-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe found no evidence of PLS corner at this location. The 1924 C.S.A.H. No. 2 road plan showed no information of a corner at this location. 1940 C.S.A.H. No. 2 road plan showed a station on a fenceline to south at a distance of 2654.20 feet west of the northeast corner of Section 9. We measured the distance between the northeast and northwest section corners and found 5262.60 feet verses County Plan of 5266.70 feet. We proportioned the mile to county distance and set the corner at a distance of 2652.50 feet west of the northeast corner of Section 9.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.