P 50, "A"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 19, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-91 (DATE) found a concrete monument with a 1/2"Ø iron in center. Monument is 2' South of 3/4"Ø iron found on C of E-W road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-1-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

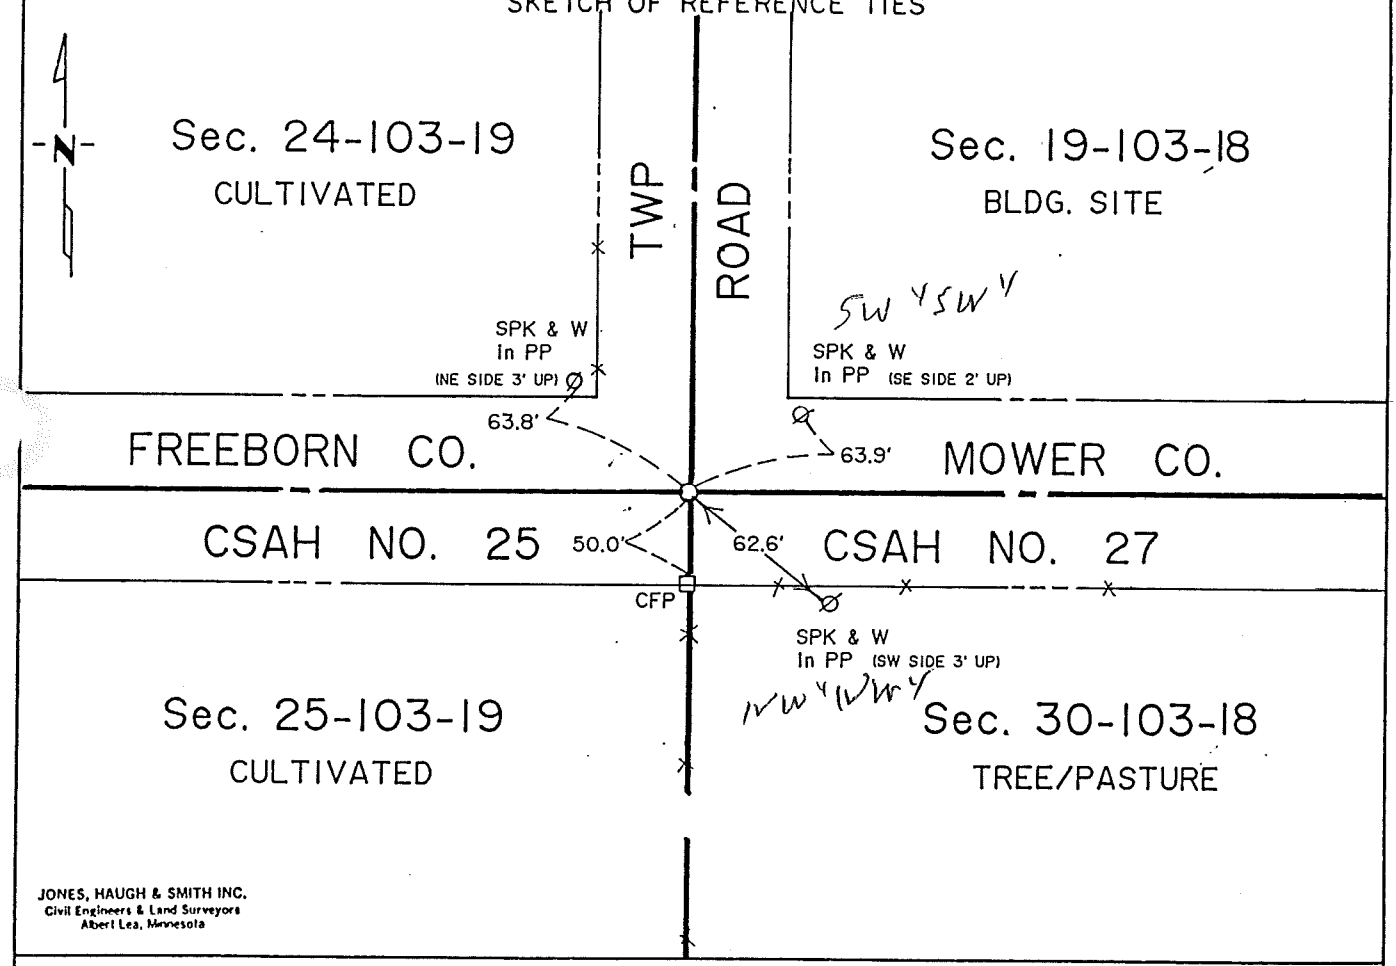

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Claudia Engan

By Marlene M Martin, Deputy

DOCUMENT NO. 420484

Bk 79 Misc Pg 334

BOOK 79 PAGE 334

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 19-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post. The following ties were taken:

12" Burr Oak	N 5° W	50 links (33.0 ft)
12" Burr Oak	N 64° E	72 links (47.52 ft)
12" Burr Oak	S 52° E	54 links (35.64 ft)
10" Burr Oak	S 5° W	89 links (58.74 ft)

The following were contacted for section corner information:
Freeborn Co Recorder's Office Freeborn Co Engineering Dept

1930 Book A of the Mower County Engineers Office show the following ties were taken:

22.1' south to CFP	49.8' SW to Ash Tree
39.0' NW to CFP	26.8' NE to Burr Oak Tree

1967 Jones Engineering crew uncovered an iron pin in concrete.

1969 Freeborn County employee, George Murphy, located corner and the following ties were taken:

Spk & W in CFP	92.4' NE	Spk & W in CFP	47.4' NW
Spk & W in PP	34.3' S		

1972 Jones & Haugh crew placed a 5/8" diameter iron 0.5 feet deep on centerline of north-east-west road in line with fence south. The following ties were taken:

Spk & W in PP	63.2' NE	Spk & W in guy post	62.0' SE
Spk & W in CP	61.4' NW		

1974 Jones & Haugh crew found a 5/8" diameter iron on centerline of north-east-west road in line with fence south. The following ties were taken:

Spk & W in east side PP	62.1' NE	Spk & W in PP	64.0'
Spk & W in guy pole	61.8' NW		
5/8" dia iron in fence	52.0' S		

1982 Jones, Haugh & Smith Inc crew found a 3/4" diameter iron flush with road surface on centerline of east-west-north roads. The following ties were taken:

Spk & W in SE side PP	61.80' NW
Spk & W in SE side PP	61.50' NE

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with the Freeborn County backhoe and uncovered a concrete monument with a 1/2" diameter iron in center. Monument is two feet south of 3/4" diameter iron found on centerline of east-west road. Therefore we accepted concrete monument found as best evidence of the perpetuation of the original public land survey corner. We set a cast iron monument near road surface above the 1/2" diameter iron in concrete. The cast iron monument fits occupation and road centerlines within the section.

BOOK 79 PAGE 335

Jones & Haugh