Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 17, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-18-93 (DATE) found a 8"x12"x16" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-21-93 (DATE) placed a CIM OVER MONUMENT FOUND

SKETCH OF REFERENCE TIES

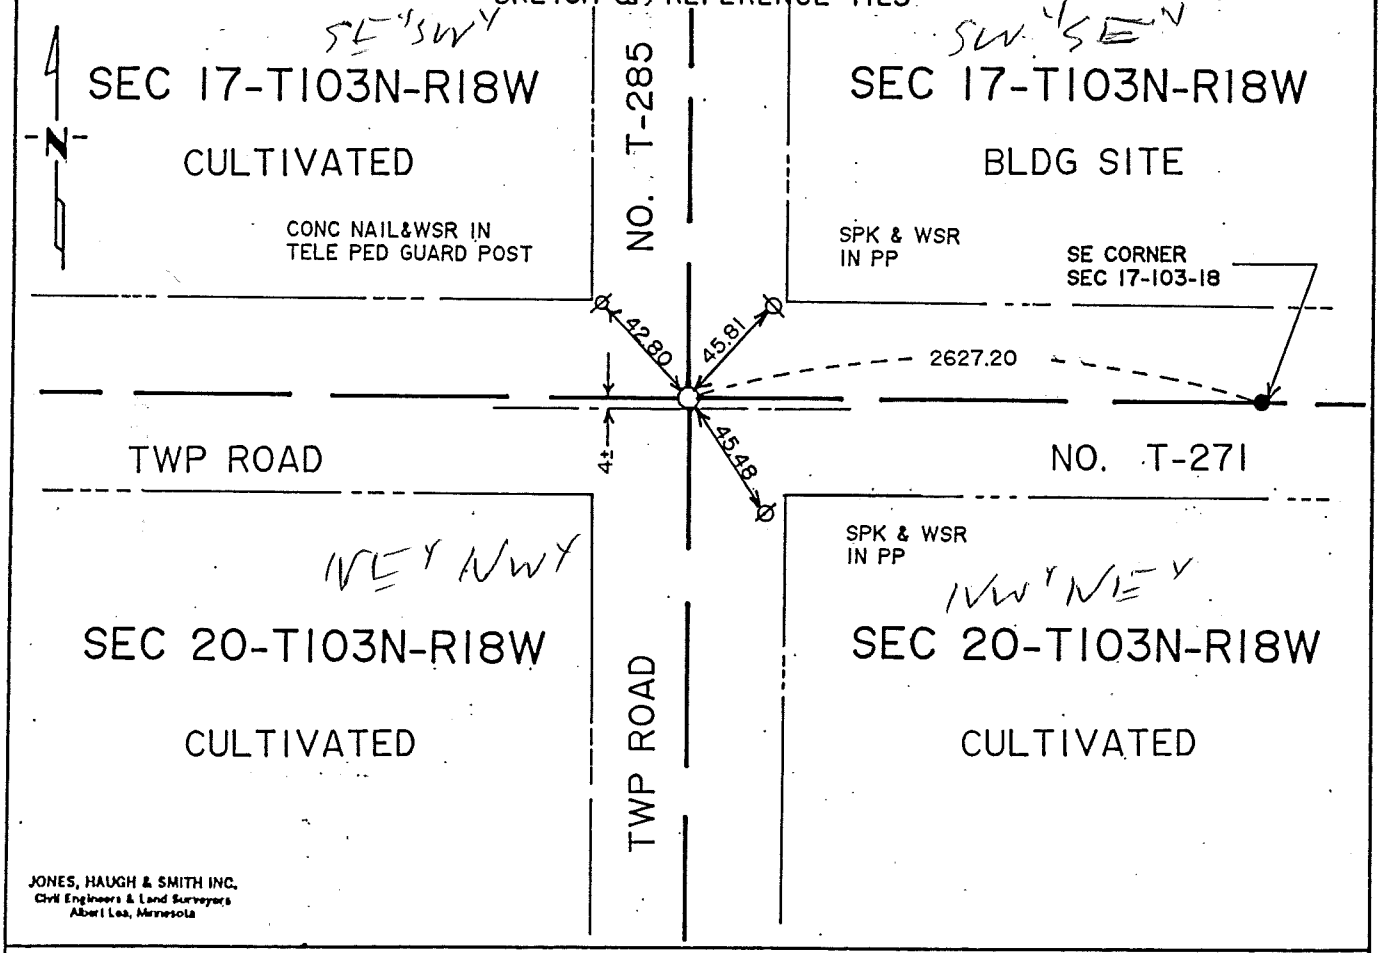

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 1993

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421535

Bk 79 Misc. Pg. 582

M.H.D. FORM NO. 2105

BOOK 79 PAGE 582

STATEMENT OF EVIDENCE

S 1/4 Cor Sec 17-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

7" Burr Oak	S 18° W	194 links (128.04 ft)
12" Burr Oak	N 27° W	412 links (273.02 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1955 Mower County Highway Dept Book 1, indicates a stone inplace 2627.20 feet between the southwest and southeast corner of this section. The following ties were taken:
57.0' SE to Burr Oak
87.5' SE to cor of school house
65.6' NE to second Maple tree

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 5'x3'x12' hole on the centerline centerline of north-south township road and east-west township road. We found an 8"x12"x16" pointed stone with old lath placed on north and south side. The stone found rested in virgin soil and was four feet north of the centerline of the east-west township road. Therefore we left monument inplace and set a cast iron monument near road surface above stone monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 583