Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 24, Township 103 Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/06/1995 (DATE) found a 5/8" IRON CAPPED #13807

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/06/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

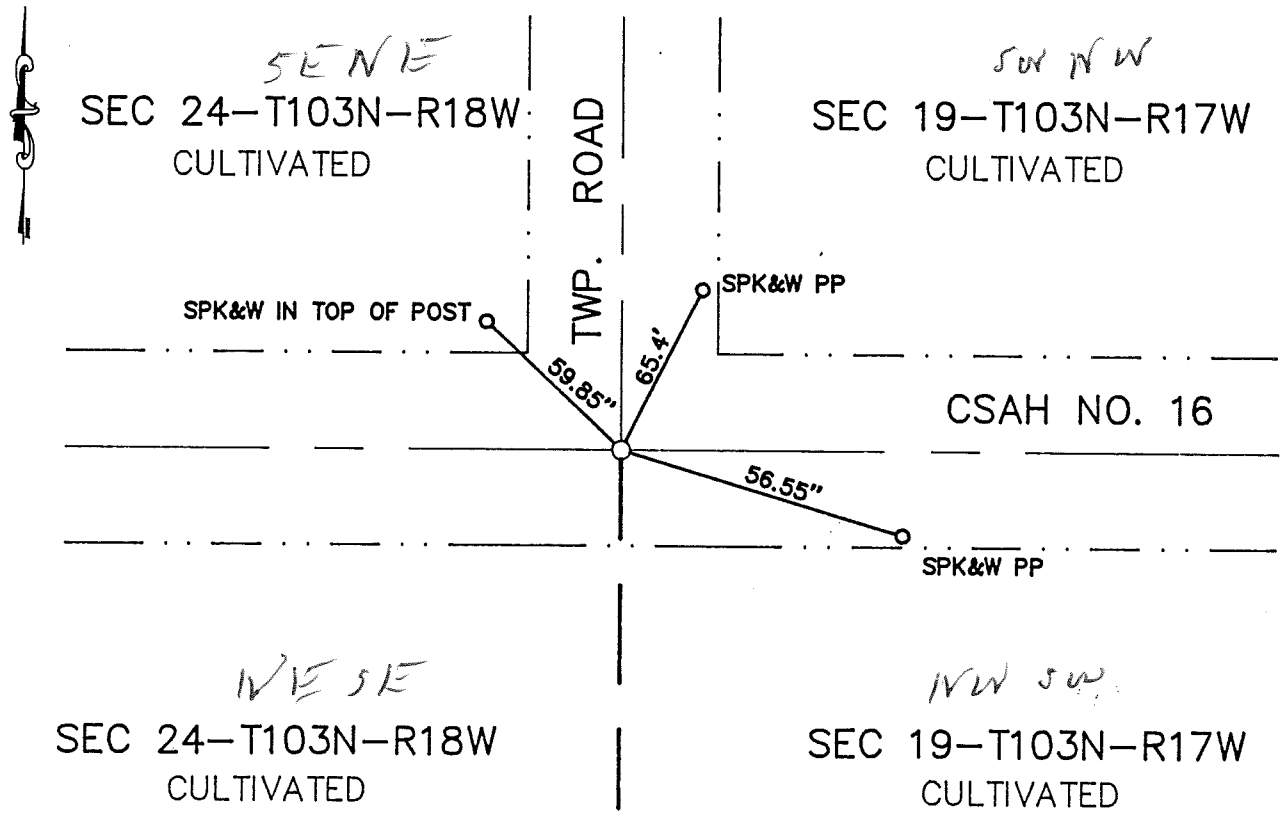

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 66

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-27-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450764

M.H.D. FORM NO. 2105

Book 94 Misc Page 66

E 1/4 Cor SEC 24-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Highway Department records state an iron pipe and stone inplace.

1954 Jones Haugh and Smith records state an iron pipe 12" below road surface.

1973 Jones Haugh and Smith crew found iron pipe 12" below road surface and set 5/8" iron over. Ties were taken.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of C.S.A.H. No. 16 E-W and CL of township road north. Located a 5/8" iron cap #13807. Removed cap and set a cast iron monument. Monument is in agreement with the 1930, 1954, and 1973 location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.