Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 36, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-3-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

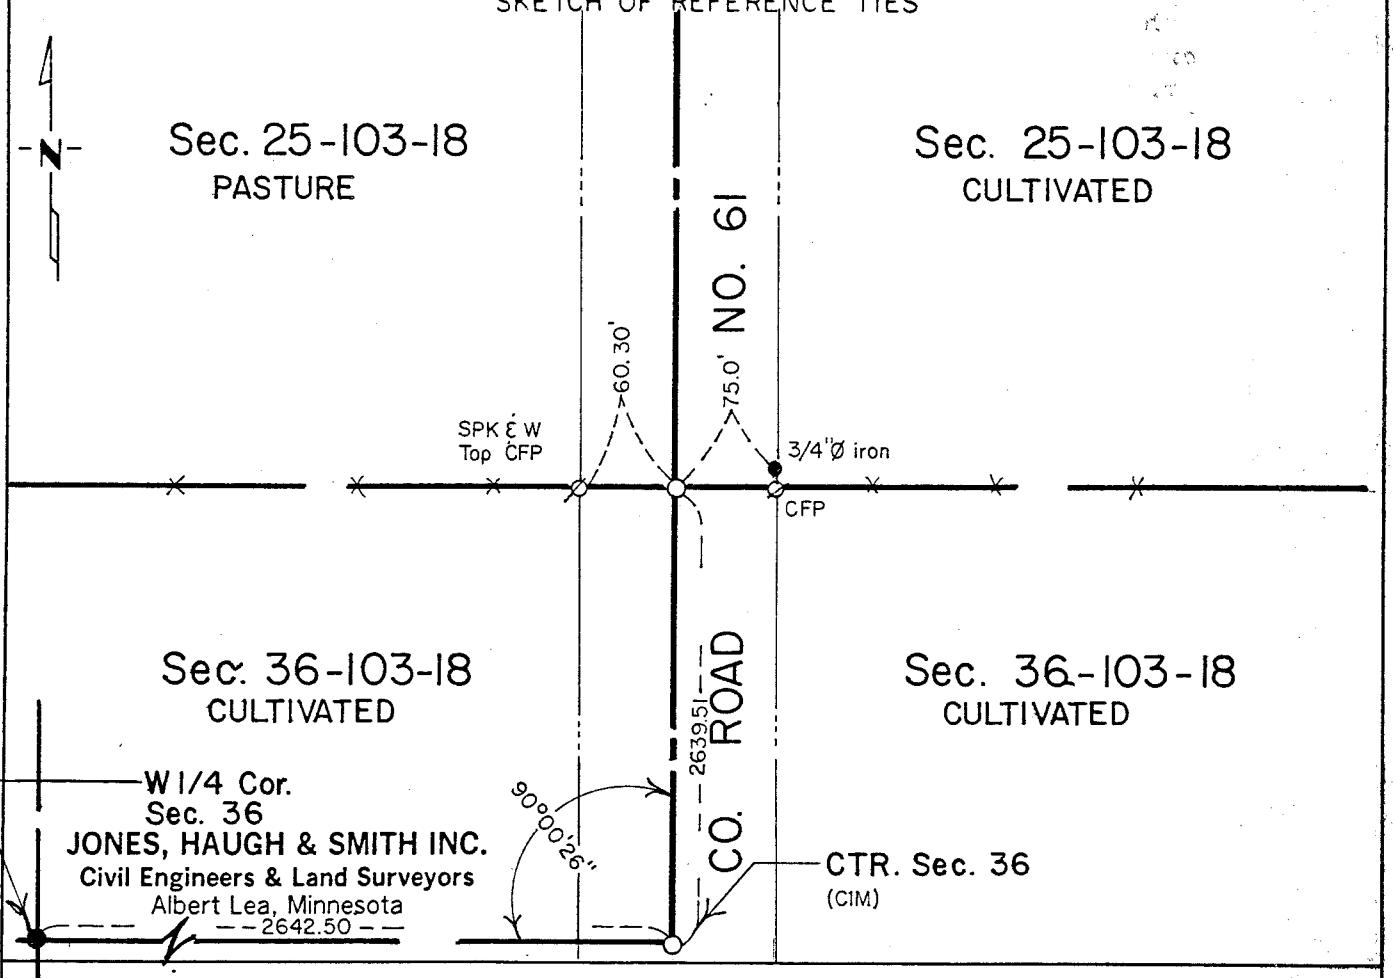

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 36-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

18" Burr Oak	S 26°E	145 links	(17.16 ft.)
18" Burr Oak	N 7°W	310 links	(204.60 ft.)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the original public land survey corner.

Record in Book "A" page 112 in the office of the Mower County Engineer. Records show corner in place and no ties were taken.

Records from Jones, Haugh & Smith Inc. show a 3/4" diameter iron in place and used for the past 40 years by all area surveyors.

1988 - Ray Tucker RLS #15471 dug with a backhoe for grading project on County Road #61. No records were kept of what was found or ties taken and all monumentation was destroyed and nothing reset.

1991 Jones, Haugh & Smith Inc. crew placed CIM over 5/8" diameter x 18" iron using private records, ties and measurements of Jones, Haugh and Smith at same location of 3/4" diameter iron which has been used for the past 40 years.

The monument fits occupation and road centerlines and past surveys within the section and is accepted as a perpetuation of the original public land survey corner.